Greenhouse Gases Technical Report

501 Ocean Bluff Way Project

City of Encinitas, California

MAY 2023

Prepared for:

RINCON
5315 Avenida Encinas, Suite 200
Carlsbad, California 92008
Contact: Cameron St. Clair, Principal

Prepared by:

DUDEK
605 Third Street
Encinitas, California 92024

Printed on 30% post-consumer recycled material.

Table of Contents

SECTION **PAGE NO.**

TABLES

FIGURES

APPENDICES

Acronyms and Abbreviations

Acronym/Abbreviation	Definition
°C	degrees Celsius
°F	degrees Fahrenheit
AB	Assembly Bill
ACC	Advanced Clean Cars Program
CalEEMod	California Emissions Estimator Model
CALGreen	California's Green Building Standards
CAP	Climate Action Plan
CAPCOA	California Air Pollution Control Officers Association
CARB	California Air Resources Board
CEC	California Energy Commission
CEQA	California Environmental Quality Act
CFCs	chlorofluorocarbons
CH_4	methane
City	City of Encinitas
CO_2	carbon dioxide
CO_2e	carbon dioxide equivalent
EISA	Energy Independence and Security Act of 2007
EO	Executive Order
EPA	U.S. Environmental Protection Agency
EV	electric vehicle
GHG	greenhouse gas
GWP	global warming potential
HCFCs	hydrochlorofluorocarbons
HFC	hydrofluorocarbon
IPCC	Intergovernmental Panel on Climate Change
kW	killowatt
kWh	kilowatt-hour
MMT	million metric ton
MT CO_2e	metric tons of CO_2 equivalent
N_2O	nitrous oxide
PFC	perfluorocarbon
Project	501 Ocean Bluff Way Project
RTP	Regional Transportation Plan
SANDAG	San Diego Association of Governments
SB	Senate Bill
SCS	Sustainable Communities Strategy
SDAPCD	San Diego Air Pollution Control District
SF_6	sulfur hexafluoride
VMT	vehicle miles traveled

INTENTIONALLY LEFT BLANK

Executive Summary

The purpose of this technical report is to assess the potential greenhouse gas (GHG) impacts associated with implementation of the 501 Ocean Bluff Way Project (Project). This assessment uses the significance thresholds in Appendix G of the California Environmental Quality Act (CEQA) Guidelines.

Project Overview

The proposed Project involves the subdivision and development of up to 27 single-family homes on 7.18 acres of currently vacant property. The project conforms with the City's existing land use and zoning designations, as well as the surrounding residential uses.

Project Design Features

The proposed Project would implement the following project design feature (PDF) intended to reduce greenhouse gas emissions from Project operations.

PDF-GHG-1: Require All-Electric Development. This measure requires that the development use all-electric appliances and end uses. Using electric instead of natural gas-powered appliances and end uses replaces a more emissions-intensive fossil fuel source of energy with a less emissions-intensive source of energy, electricity from the grid that is increasingly transitioning to renewable sources.

In addition, the project would implement the following air quality PDFs that would serve to have GHG co-benefits.

PDF-AQ-1: Fugitive Dust Control. Standard construction practices would be employed to reduce fugitive dust emissions and include watering of the active sites and exposed surfaces up two times per day, depending on weather conditions; watering unpaved roads, and limiting vehicle speeds on unpaved roads. Construction of the Project would be subject to SDAPCD Rule 55 – Fugitive Dust Control. Compliance with Rule 55 would limit fugitive dust that may be generated during grading and construction activities.

PDF-AQ-2: Temporary Electric Power. The Project will provide temporary electricity to the project site during the building construction phases and prohibit the use of diesel-fueled/natural gas fueled generators during the building construction phases.

PDF-AQ-3: Electric Air Compressors. The Project will limit air compressors used during the architectural coating/painting phases to equipment that is electric-powered.

PDF-AQ-4: Electric Fireplaces. Require the installation of only electric fireplaces in future residential construction. Future residential units are prohibited from having wood-burning fireplaces or stoves.

PDF-GHG-1 and PDF-AQ-1 through PDF-AQ-4 would be required as City-imposed Conditions of Approval to ensure it is implemented during construction and operation of the proposed Project.

Global climate change is primarily considered a cumulative impact but must also be evaluated on a project-level under CEQA. A project contributes to this potential impact through its incremental emissions combined with the cumulative increase of all other sources of greenhouse gas (GHG) emissions. GHGs are gases that absorb infrared radiation in the atmosphere. Principal GHGs regulated under state and federal law and regulations include carbon dioxide (CO_2), methane (CH_4), and nitrous oxide (N_2O). GHG emissions are measured in metric tons of CO_2 equivalent (MT CO_2e), which account for weighted global warming potential (GWP) factors for CH_4 and N_2O.

Greenhouse Gas Emissions

The City has adopted an interim threshold based on the Bay Area Air Quality Management District's (BAAQMD) Justification Report: CEQA Thresholds for Evaluating the Significance of Climate Impacts. BAAQMD states its new climate change thresholds follow an approach endorsed by the Supreme Court in *Center for Biological Diversity v. Department of Fish & Wildlife* (2015) 62 Cal.4th 204. Under this approach, BAAQMD considers projects that do their "fair share" of what is required to meet the state's ambitious long-term climate goals to have a less-than-significant impact on climate change for CEQA purposes, and it defines the long-term climate goals as achieving carbon neutrality by 2045. BAAQMD finds that in order to do its required "fair share" a land use project must either be consistent with a robust local GHG reduction strategy meeting the criteria of CEQA Guidelines Section 15183.5(b) or it must include certain minimum design elements.

The City's Climate Action Plan (CAP) meets the criteria for under State CEQA Guidelines Section 15183.5(b), as such, projects that are consistent with the CAP will not make a cumulatively considerable contribution to global climate change under CEQA. As discussed below, the Project is consistent with the CAP.

The Project's GHG emissions were quantified for informational purposes only. Construction of the Project would result in GHG emissions primarily associated with the use of off-road construction equipment, on-road hauling and vendor (material delivery) trucks, and worker vehicles. The Project would generate operational GHG emissions from area sources (landscape maintenance), energy sources (electricity consumption and natural gas combustion), mobile sources (vehicle trips), water supply and wastewater treatment, solid waste, and refrigerants. Estimated annual Project-generated operational GHG emissions at buildout in 2027 would be approximately 317 MT CO_2e per year. Estimated annual Project-generated operational emissions in 2027, plus amortized Project construction emissions would be approximately 340 MT CO_2e per year.

Because the Project would be consistent with the CAP it would be considered to have a less than significant impact on greenhouse gas emissions.

Conflicts with Applicable GHG Reduction Plans

The City's Climate Action Plan (CAP) serves as a guiding document for reducing GHG emissions from the community and municipal sources within the jurisdiction. The City's CAP identified reduction targets for the City based on State goals embodied in Assembly Bill 32, Senate Bill 32, and Executive Orders B-30-15, and S-3-05.

The Project would not conflict with the City's CAP because it would comply with applicable measures at the time of development.

Regarding the California Air Resources Board's (CARB) 2022 Scoping Plan and AB 1279 (2045 carbon neutrality), the City's CAP would put it on a trajectory for meeting its share of reductions towards 2050, which would align with 2045 targets in concert with CARB measures for carbon capture and storage.

Based on the above, the Project would not conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing the emissions of GHGs or generate GHGs that may have a significant impact on the environment. This impact would be **less than significant.**

Mitigation Measures

No mitigation measures are required.

Summary of Findings

Table ES-1. Summary of Impact Determinations

Analysis	Report Section	CEQA Checklist Question	Significance Determinations	
			Unmitigated	Mitigated
GHG Emissions	3.4.1	GHG-1	Less than Significant	No Mitigation Required.
GHG Reduction Plan	3.4.2	GHG-2	Less than Significant	No Mitigation Required.

INTENTIONALLY LEFT BLANK

1 Introduction

1.1 Report Purpose and Scope

The purpose of this technical report is to assess the potential greenhouse gas (GHG) impacts associated with construction and operation of the 501 Ocean Bluff Way (Project). This analysis uses the significance thresholds in Appendix G of the California Environmental Quality Act (CEQA) Guidelines (14 CCR 15000 et seq.) and the emissions-based screening thresholds recommended by the City.

1.2 Project Location

The 10.26-acre Project site is located on Assessor Parcel Numbers 258-141-27, -28, 258-140-23, -24, -25, and -26. The project site is located at 501 Ocean Bluff Way between Camino De Orchidia and Camino El Dorado, south of Encinitas Boulevard in the City of Encinitas, California. The project site is set in a mostly residential area of the City, with residential housing developments to the south and north of the subject site in all directions.

1.3 Project Description

The Project site is a vacant 10.26-acre site located at 501 Ocean Bluff Way in the City of Encinitas, California (See Figure 1). The proposed Project involves the subdivision and development of up to 27 single-family homes on 7.18 acres of currently vacant property The Project conforms with the City's existing land use and zoning designations, as well as the surrounding residential uses. See Figure 2 Site Plan for details.

1.4 Project Design Features

The proposed Project would implement the following project design feature (PDF) intended to reduce greenhouse gas emissions from Project operations.

PDF-GHG-1: All-Electric Development. This measure requires that the development shall use all-electric appliances and end uses. Using electric instead of natural gas-powered appliances and end uses replaces a more emissions-intensive fossil fuel source of energy with a less emissions-intensive source of energy, electricity from the grid that is increasingly transitioning to renewable sources.

In addition, the project would implement the following air quality PDFs that would serve to have GHG co-benefits.

PDF-AQ-1: Fugitive Dust Control. Standard construction practices would be employed to reduce fugitive dust emissions and include watering of the active sites and exposed surfaces up two times per day, depending on weather conditions; watering unpaved roads, and limiting vehicle speeds on unpaved roads. Construction of the Project would be subject to SDAPCD Rule 55 – Fugitive Dust Control. Compliance with Rule 55 would limit fugitive dust that may be generated during grading and construction activities.

PDF-AQ-2: Temporary Electric Power. The Project will provide temporary electricity to the project site during the building construction phases and prohibit the use of diesel-fueled/natural gas fueled generators during the building construction phases.

PDF-AQ-3: Electric Air Compressors. The Project will limit air compressors used during the architectural coating/painting phases to equipment that is electric-powered.

PDF-AQ-4: Electric Fireplaces. Require the installation of only electric fireplaces in future residential construction. Future residential units are prohibited from having wood-burning fireplaces or stoves.

PDF-GHG-1 and **PDF-AQ-1 through PDF-AQ-4** would be required as City-imposed Conditions of Approval to ensure it is implemented during construction and operation of the proposed Project.

INTENTIONALLY LEFT BLANK

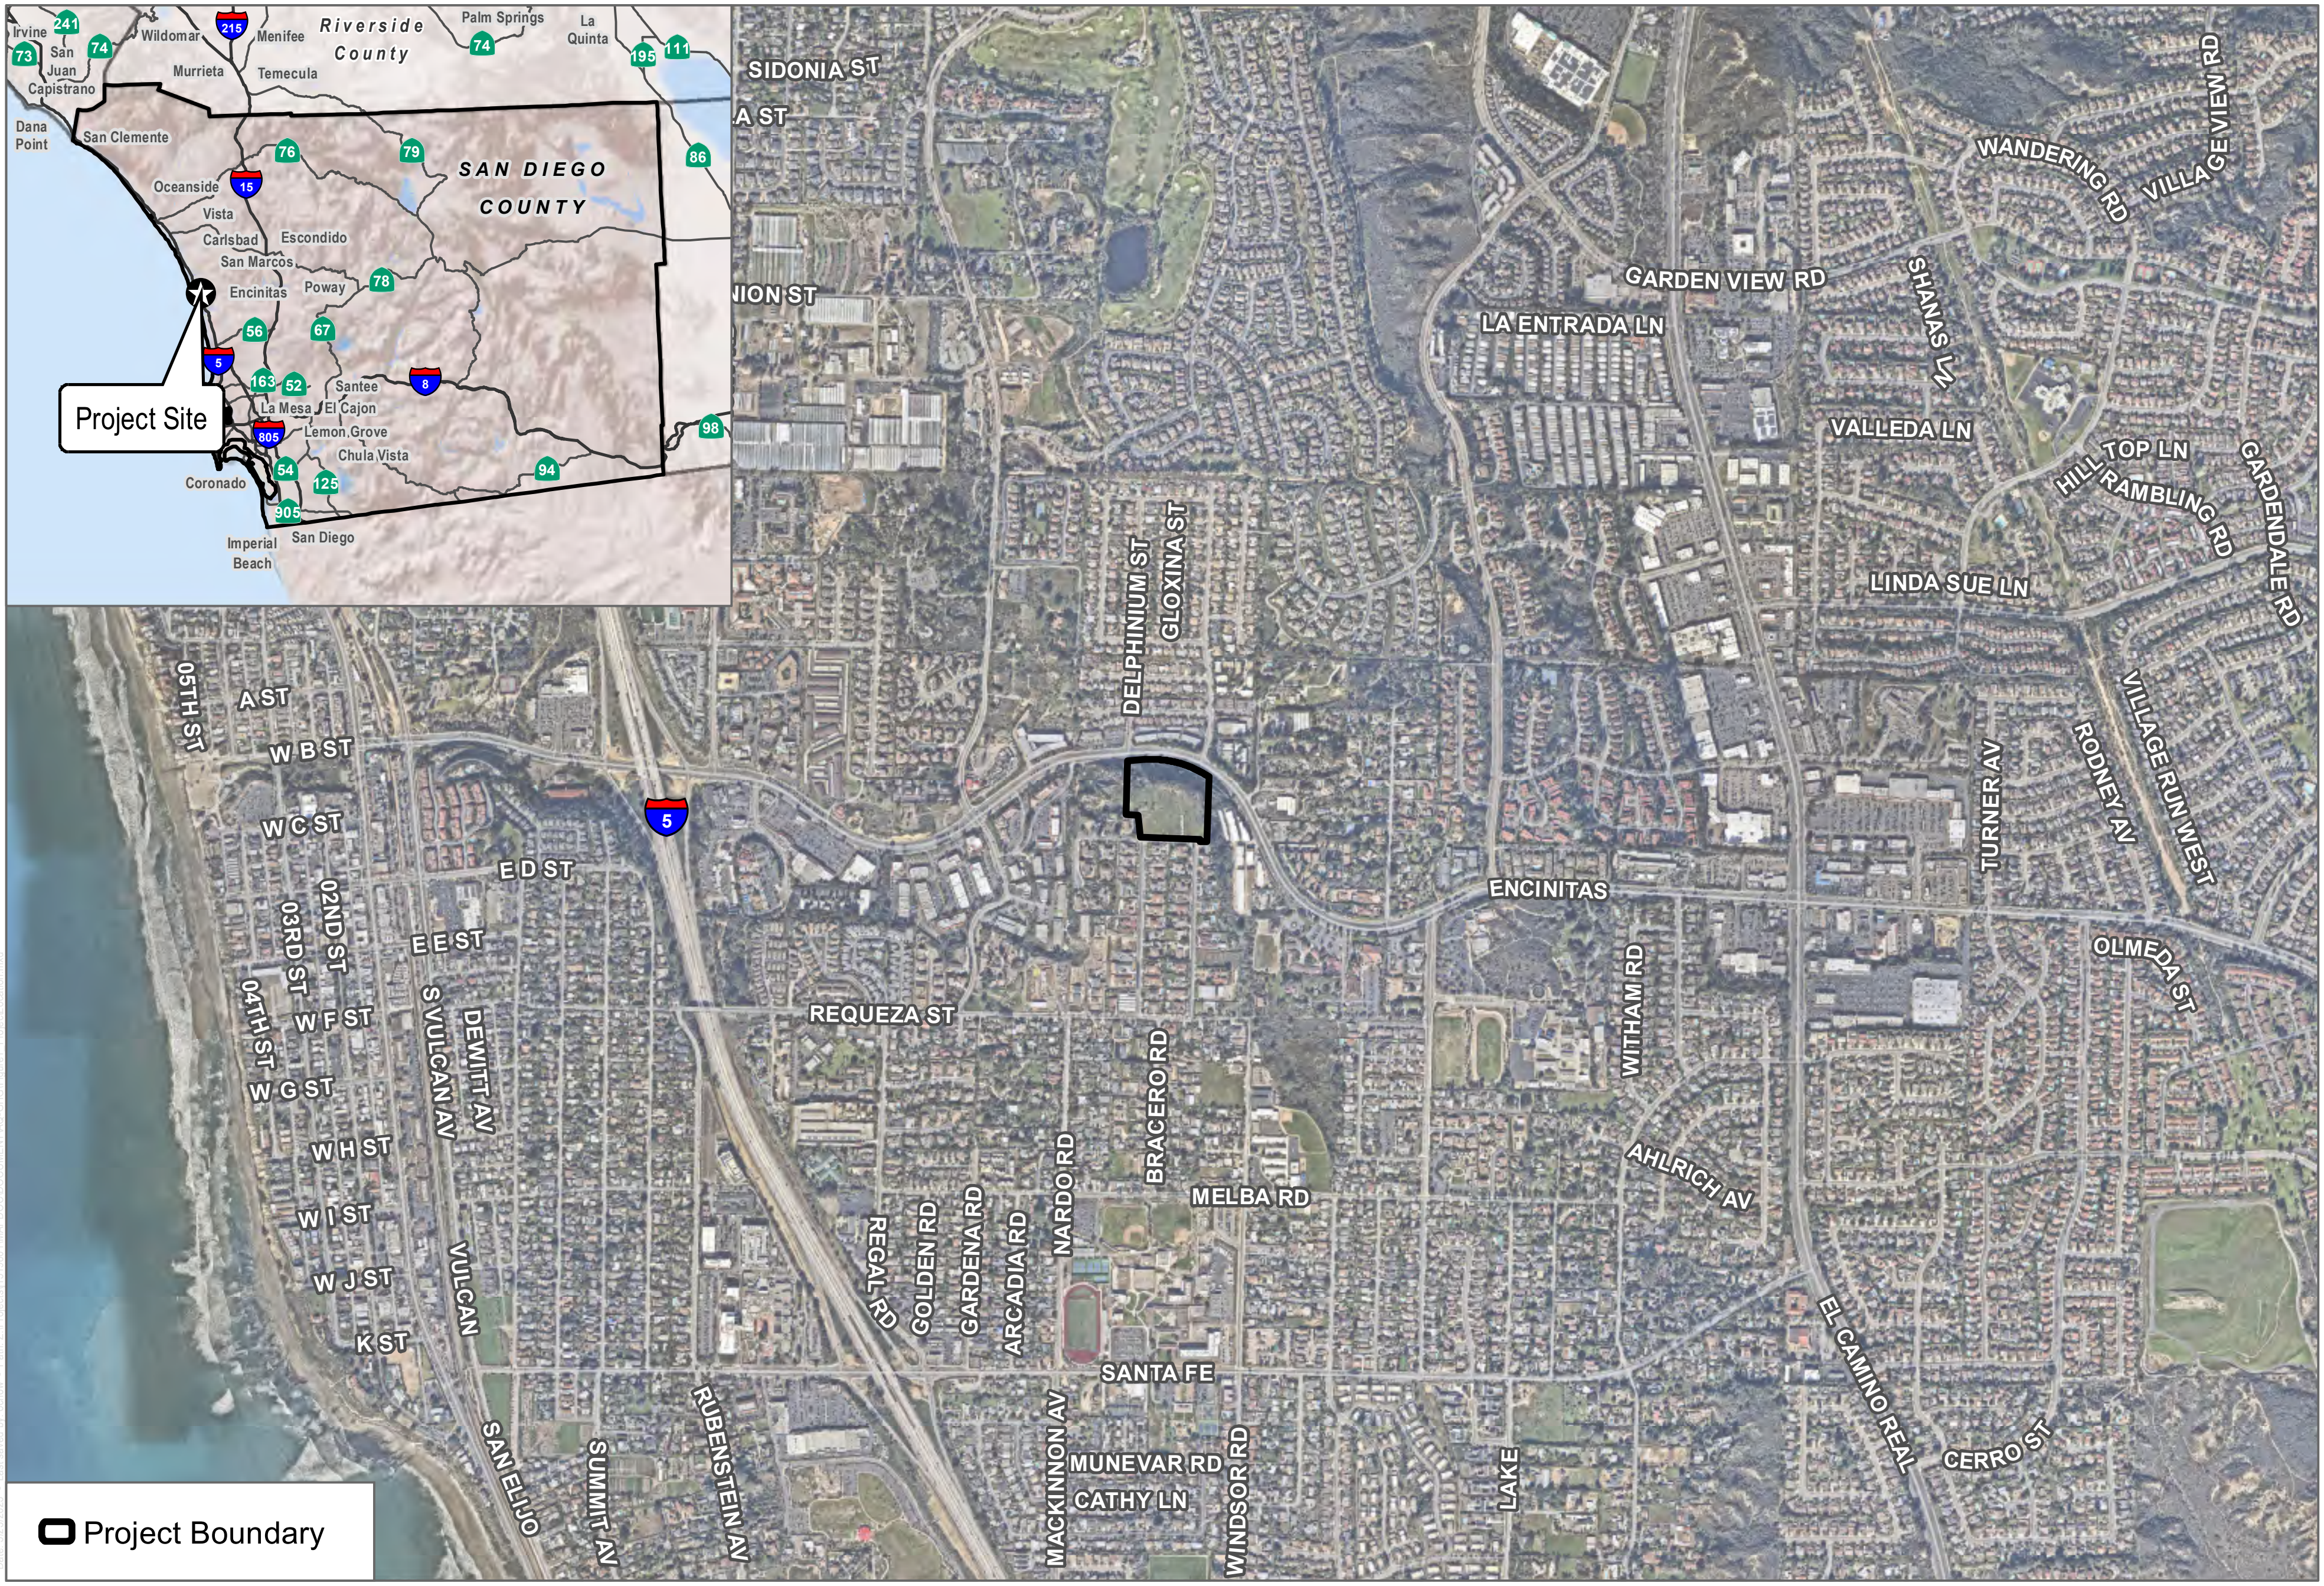

SOURCE: San Diego Public Imagery 2019

DUDEK

0 800 1,600 Feet

FIGURE 1

Project Location

Ocean Bluff Project

INTENTIONALLY LEFT BLANK

SOURCE: San Diego Public Imagery 2019

DUDEK

0 65 130 Feet

FIGURE 2

Site Plan

Ocean Bluff Project

INTENTIONALLY LEFT BLANK

2 Greenhouse Gas Emissions

2.1 Environmental Setting

2.1.1 Climate Change Overview

Climate change refers to any significant change in measures of climate, such as temperature, precipitation, or wind patterns, lasting for an extended period of time (decades or longer). The Earth's temperature depends on the balance between energy entering and leaving the planet's system. Many factors, both natural and human, can cause changes in Earth's energy balance, including variations in the sun's energy reaching Earth, changes in the reflectivity of Earth's atmosphere and surface, and changes in the greenhouse effect, which affects the amount of heat retained by Earth's atmosphere (EPA 2022a).

The greenhouse effect is the trapping and build-up of heat in the atmosphere (troposphere) near the Earth's surface. The greenhouse effect traps heat in the troposphere through a threefold process as follows: Short-wave radiation emitted by the Sun is absorbed by the Earth; the Earth emits a portion of this energy in the form of long-wave radiation; and GHGs in the upper atmosphere absorb this long-wave radiation and emit it into space and toward the Earth. The greenhouse effect is a natural process that contributes to regulating the Earth's temperature and creates a pleasant, livable environment on the Earth. Human activities that emit additional GHGs to the atmosphere increase the amount of infrared radiation that gets absorbed before escaping into space, thus enhancing the greenhouse effect and causing the Earth's surface temperature to rise.

The scientific record of the Earth's climate shows that the climate system varies naturally over a wide range of time scales and that in general, climate changes prior to the Industrial Revolution in the 1700s can be explained by natural causes, such as changes in solar energy, volcanic eruptions, and natural changes in GHG concentrations. Recent climate changes, in particular the warming observed over the past century, however, cannot be explained by natural causes alone. Rather, it is extremely likely that human activities have been the dominant cause of that warming since the mid-20th century and is the most significant driver of observed climate change (IPCC 2014; EPA 2022a). Human influence on the climate system is evident from the increasing GHG concentrations in the atmosphere, positive radiative forcing, observed warming, and improved understanding of the climate system (IPCC 2014). The atmospheric concentrations of GHGs have increased to levels unprecedented in the last 800,000 years, primarily from fossil fuel emissions and secondarily from emissions associated with land use changes (IPCC 2014). Continued emissions of GHGs will cause further warming and changes in all components of the climate system, which is discussed further in Section 3.1.5, Potential Effects of Climate Change.

2.1.2 Greenhouse Gases and other Climate Forcing Substances

A GHG is any gas that absorbs infrared radiation in the atmosphere; in other words, GHGs trap heat in the atmosphere. GHGs include, but are not limited to, carbon dioxide (CO_2), methane (CH_4), nitrous oxide (N_2O), ozone (O_3), water vapor, hydrofluorocarbons (HFCs), hydrochlorofluorocarbons (HCFCs), perfluorocarbons (PFCs), and sulfur hexafluoride (SF_6).[1] Some GHGs, such as CO_2, CH_4, and N_2O, occur naturally and are emitted to the

1 California Health and Safety Code 38505 identifies seven GHGs that CARB is responsible to monitor and regulate to reduce emissions: CO_2, CH_4, N_2O, SF_6, HFCs, PFCs, and NF_3.

atmosphere through natural processes and human activities. Of these gases, CO_2 and CH_4 are emitted in the greatest quantities from human activities. Manufactured GHGs, which have a much greater heat-absorption potential than CO_2, include fluorinated gases, such as HFCs, HCFCs, PFCs, and SF_6, which are associated with certain industrial products and processes. A summary of the most common GHGs and their sources is included in the following text.[2] Also included is a discussion of other climate forcing substances.

Carbon Dioxide (CO_2). CO_2 is a naturally occurring gas and a by-product of human activities and is the principal anthropogenic GHG that affects the Earth's radiative balance. Natural sources of CO_2 include respiration of bacteria, plants, animals, and fungus; evaporation from oceans; volcanic out-gassing; and decomposition of dead organic matter. Human activities that generate CO_2 are from the combustion of fuels such as coal, oil, natural gas, and wood and changes in land use.

Methane (CH_4). CH_4 is produced through both natural and human activities. CH_4 is a flammable gas and is the main component of natural gas. Methane is produced through anaerobic (without oxygen) decomposition of waste in landfills, flooded rice fields, animal digestion, decomposition of animal wastes, production and distribution of natural gas and petroleum, coal production, and incomplete fossil fuel combustion.

Nitrous Oxide (N_2O). N_2O is produced through natural and human activities, mainly through agricultural activities and natural biological processes, although fuel burning and other processes also create N_2O. Sources of N_2O include soil cultivation practices (microbial processes in soil and water), especially the use of commercial and organic fertilizers, manure management, industrial processes (such as in nitric acid production, nylon production, and fossil-fuel-fired power plants), vehicle emissions, and using N_2O as a propellant (such as in rockets, racecars, and aerosol sprays).

Fluorinated Gases. Fluorinated gases (also referred to as F-gases) are synthetic powerful GHGs emitted from many industrial processes. Fluorinated gases are commonly used as substitutes for stratospheric ozone-depleting substances (e.g., CFCs, HCFCs, and halons). The most prevalent fluorinated gases include the following:

- **Hydrofluorocarbons:** HFCs are compounds containing only hydrogen, fluorine, and carbon atoms. HFCs are synthetic chemicals used as alternatives to ozone-depleting substances in serving many industrial, commercial, and personal needs. HFCs are emitted as by-products of industrial processes and are used in manufacturing.
- **Perfluorocarbons:** PFCs are a group of human-made chemicals composed of carbon and fluorine only. These chemicals were introduced as alternatives, with HFCs, to the ozone depleting substances. The two main sources of PFCs are primary aluminum production and semiconductor manufacturing. Since PFCs have stable molecular structures and do not break down through the chemical processes in the lower atmosphere, these chemicals have long lifetimes, ranging between 10,000 and 50,000 years.
- **Sulfur Hexafluoride:** SF_6 is a colorless gas soluble in alcohol and ether and slightly soluble in water. SF_6 is used for insulation in electric power transmission and distribution equipment, semiconductor manufacturing, the magnesium industry, and as a tracer gas for leak detection.
- **Nitrogen Trifluoride:** NF_3 is used in the manufacture of a variety of electronics, including semiconductors and flat panel displays.

2 The descriptions of GHGs are summarized from the Intergovernmental Panel on Climate Change (IPCC) Second Assessment Report (1995), IPCC Fourth Assessment Report (2007), CARB's Glossary of Air Pollution Terms (2015), and EPA's Glossary of Climate Change Terms (2016).

Chlorofluorocarbons (CFCs). CFCs are synthetic chemicals that have been used as cleaning solvents, refrigerants, and aerosol propellants. CFCs are chemically unreactive in the lower atmosphere (troposphere) and the production of CFCs was prohibited in 1987 due to the chemical destruction of stratospheric O_3.

Hydrochlorofluorocarbons (HCFCs). HCFCs are a large group of compounds, whose structure is very close to that of CFCs—containing hydrogen, fluorine, chlorine, and carbon atoms—but including one or more hydrogen atoms. Like HFCs, HCFCs are used in refrigerants and propellants. HCFCs were also used in place of CFCs for some applications; however, their use in general is being phased out.

Black Carbon. Black carbon is a component of fine particulate matter, which has been identified as a leading environmental risk factor for premature death. It is produced from the incomplete combustion of fossil fuels and biomass burning, particularly from older diesel engines and forest fires. Black carbon warms the atmosphere by absorbing solar radiation, influences cloud formation, and darkens the surface of snow and ice, which accelerates heat absorption and melting. Black carbon is a short-lived species that varies spatially, which makes it difficult to quantify the global warming potential. Diesel particulate matter emissions are a major source of black carbon and are toxic air contaminates (TACs) that have been regulated and controlled in California for several decades to protect public health. In relation to declining diesel particulate matter from the California Air Resources Board's (CARB's) regulations pertaining to diesel engines, diesel fuels, and burning activities, CARB estimates that annual black carbon emissions in California have reduced by 70% between 1990 and 2010, with 95% control expected by 2020 (CARB 2014).

Water Vapor. The primary source of water vapor is evaporation from the ocean, with additional vapor generated by sublimation (change from solid to gas) from ice and snow, evaporation from other water bodies, and transpiration from plant leaves. Water vapor is the most important, abundant, and variable GHG in the atmosphere and maintains a climate necessary for life.

Ozone (O_3). Tropospheric O_3, which is created by photochemical reactions involving gases from both natural sources and human activities, acts as a GHG. Stratospheric O_3, which is created by the interaction between solar ultraviolet radiation and molecular oxygen (O_2), plays a decisive role in the stratospheric radiative balance. Depletion of stratospheric O_3, due to chemical reactions that may be enhanced by climate change, results in an increased ground-level flux of ultraviolet-B radiation.

Aerosols. Aerosols are suspensions of particulate matter in a gas emitted into the air through burning biomass (plant material) and fossil fuels. Aerosols can warm the atmosphere by absorbing and emitting heat and can cool the atmosphere by reflecting light.

2.1.3 Global Warming Potential

Gases in the atmosphere can contribute to climate change both directly and indirectly. Direct effects occur when the gas itself absorbs radiation. Indirect radiative forcing occurs when chemical transformations of the substance produce other GHGs, when a gas influences the atmospheric lifetimes of other gases, and/or when a gas affects atmospheric processes that alter the radiative balance of the Earth (e.g., affect cloud formation or albedo) (EPA 2022b). The Intergovernmental Panel on Climate Change (IPCC) developed the global warming potential (GWP) concept to compare the ability of each GHG to trap heat in the atmosphere relative to another gas. The GWP of a GHG is defined as the ratio of the time-integrated radiative forcing from the instantaneous release of 1 kilogram of a trace substance relative to that of 1 kilogram of a reference gas (IPCC 2014). The reference gas used is CO_2; therefore, GWP-weighted emissions are measured in metric tons CO_2 equivalent (MT CO_2e).

The current version of the CalEEMod (version 2020.4.0) assumes that the GWP for CH_4 is 25 (so emissions of 1 MT of CH_4 are equivalent to emissions of 25 MT of CO_2), and the GWP for N_2O is 298, based on the IPCC Fourth Assessment Report (IPCC 2007). The GWP values identified in CalEEMod were applied to the Project.

2.1.4 Sources of Greenhouse Gas Emissions

Global Inventory

Anthropogenic GHG emissions worldwide in 2020 (the most recent year for which data is available) totaled approximately 49,800 million metric tons (MMT) of CO_2e, excluding land use change and forestry (PBL 2022). The top six GHG emitters include China, the United States, the Russian Federation, India, Japan, and the European Union, which accounted for approximately 60% of the total global emissions, or approximately 30,270 MMT CO_2e (PBL 2018). Table 1 presents the top GHG-emissions-producing countries.

Table 1. Six Top GHG Producer Countries

Emitting Countries	2020 GHG Emissions (MMT CO_2e)[a,b]
China	14,300
United States	5,640
European Union	3,440
India	3,520
Russian Federation	2,210
Japan	1,160
Total	**30,270**

Source: PBL 2022.
Notes: MMT CO_2e = million metric tons of carbon dioxide equivalent.
[a] Column may not add due to rounding.
[b] GHG emissions do not include land use change and forestry-related GHG emissions.

National Inventory

Per the EPA Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990 to 2020 (EPA 2022), total United States GHG emissions were approximately 5,981.4 MMT CO_2e in 2020 (EPA 2022). The primary GHG emitted by human activities in the United States was CO_2, which represented approximately 94.7% of total GHG emissions (4,715 MMT CO_2e). The largest source of CO_2, and of overall GHG emissions, was fossil-fuel combustion, which accounted for approximately 87.2% of CO_2 emissions in 2020 (4,342.7 MMT CO_2e). Total U.S. emissions have decreased by 7.3% from 1990 to 2020, down from a high of 15.7% above 1990 levels in 2007. Emissions decreased from 2019 to 2020 by 9.0% (590.4 MMT CO_2e.). Net emissions (i.e., including sinks) were 5,222.4 MMT CO_2e in 2020. Overall, net emissions decreased 10.6% percent from 2019 to 2020 and decreased 21.4 percent from 2005 levels. The sharp decline in emissions from 2019 to 2020 is largely due to the impacts of the coronavirus (COVID-19) pandemic on travel and economic activity; however, the decline also reflects the combined impacts of long-term trends in many factors, including population, economic growth, energy markets, technological changes including energy efficiency, and the carbon intensity of energy fuel choices. Between 2019 and 2020, the decrease in total GHG emissions was driven largely by a 10.5% decrease in CO_2 emissions from fossil fuel combustion, including a 13.3%

decrease in transportation sector emissions from less travel due to the COVID-19 pandemic and a 10.4% decrease in the electric power sector. The decrease in electric power sector emissions was due to a decrease in electricity demand of 2.5% since 2019 and also reflects the continued shift from coal to less carbon intensive natural gas and renewables (EPA 2022).

State Inventory

According to California's 2000–2020 GHG emissions inventory (2022 edition), California emitted approximately 369.2 MMT CO_2e in 2020, including emissions resulting from out-of-state electrical generation (CARB 2022a). The sources of GHG emissions in California include transportation, industry, electric power production from both in-state and out-of-state sources, residential and commercial activities, agriculture, high-GWP substances, and recycling and waste. Table 2 presents California GHG emission source categories and their relative contributions to the emissions inventory in 2020.

Between 2000 and 2019, per-capita GHG emissions in California have dropped from a peak of 14.0 MT per person in 2001 to 10.5 MT per person in 2019, representing an approximate 25% decrease. In addition, total GHG emissions in 2019 were approximately 7 MMT CO_2e lower than 2018 emissions (CARB 2022a).

Table 2. GHG Emissions Sources in California

Source Category	Annual GHG Emissions (MMT CO_2e)	Percent of Total*
Transportation	136.60	37%
Industrial uses	73.84	20%
Electricity generation[a]	59.07	16%
Residential and commercial uses	36.92	10%
Agriculture and Forestry	33.22	9%
High GWP substances	22.15	6%
Recycling and waste	7.38	2%
Totals	**369.2**	**100%**

Source: CARB 2022b.
Notes: GHG = greenhouse gas; GWP = global warming potential; MMT CO_2e = million metric tons of carbon dioxide equivalent.
Emissions reflect 2020 California GHG inventory.
Totals may not sum due to rounding.
[a] Includes emissions associated with imported electricity, which account for 18.46 MMT CO_2e.

Per capita GHG emissions in California have dropped from a 2001 peak of 13.8 MT per person to 9.3 MT per person in 2020, a 33% decrease. In 2016, statewide GHG emissions dropped below the 2020 GHG Limit of 431 MMT CO_2e and have remained below the Limit since that time (CARB 2022a).

Local Inventories

The City prepared the baseline greenhouse gas inventory for the year 2012 for it 2018 Climate Action Plan (CAP). The 2012 emissions inventory for the City is shown in Table 3 below.

Table 3. City of Encinitas GHG Emissions by Sectors for 2012

Source Category	Annual GHG Emissions ($MT\ CO_2e$)	Percent of Total
On-Road Transportation	244,172	53
Electricity	113,556	25
Natural Gas	62,027	14
Solid Waste	13,610	3
Water	14,299	3
Off-Road Transportation	9,138	2
Wastewater	2,155	0.5
Total	**459,000**	**100**

Source: City of Encinitas 2018.
Notes: GHG emissions for each category are rounded. Sums may not add up to totals due to rounding.

2.1.5 Potential Effects of Climate Change

Globally, climate change has the potential to affect numerous environmental resources through uncertain impacts related to future air temperatures and precipitation patterns. The 2014 IPCC Synthesis Report indicated that warming of the climate system is unequivocal and since the 1950s, many of the observed changes are unprecedented over decades to millennia. Signs that global climate change has occurred include warming of the atmosphere and ocean, diminished amounts of snow and ice, and rising sea levels (IPCC 2014).

In California, climate change impacts have the potential to affect sea-level rise, agriculture, snowpack and water supply, forestry, wildfire risk, public health, frequency of severe weather events, and electricity demand and supply. The primary effect of global climate change has been a rise in average global tropospheric temperature. Reflecting the long-term warming trend since pre-industrial times, observed global mean surface temperature for the decade 2006–2015 was 0.87°C (1.6°F) (likely between 0.75°C [1.4°F] and 0.99°C [1.8°F]) higher than the average over the 1850–1900 period (IPCC 2018). Scientific modeling predicts that continued emissions of GHGs at or above current rates would induce more extreme climate changes during the twenty-first century than were observed during the twentieth century. Human activities are estimated to have caused approximately 1.0°C (1.8°F) of global warming above pre-industrial levels, with a likely range of 0.8°C to 1.2°C (1.4°F to 2.2°F) (IPCC 2018). Global warming is likely to reach 1.5°C (2.7°F) between 2030 and 2052 if it continues to increase at the current rate (IPCC 2018).

Although climate change is driven by global atmospheric conditions, climate change impacts are felt locally. A scientific consensus confirms that climate change is already affecting California. The Office of Environmental Health Hazard Assessment identified various indicators of climate change in California, which are scientifically based measurements that track trends in various aspects of climate change. Many indicators reveal discernible evidence that climate change is occurring in California and is having significant, measurable impacts in the state. Changes in the state's climate have been observed, including an increase in annual average air temperature with record warmth from 2012 to 2016, more frequent extreme heat events, more extreme drought, a decline in winter chill, an increase in cooling degree days and a decrease in heating degree days, and an increase in variability of statewide precipitation (OEHHA 2018).

Warming temperatures and changing precipitation patterns have altered California's physical systems—the ocean, lakes, rivers, and snowpack—upon which the state depends. Winter snowpack and spring snowmelt runoff from the

Sierra Nevada and southern Cascade Mountains provide approximately one-third of the state's annual water supply. Impacts of climate on physical systems have been observed such as high variability of snow-water content (i.e., amount of water stored in snowpack), decrease in snowmelt runoff, glacier change (loss in area), rise in sea levels, increase in average lake water temperature and coastal ocean temperature, and a decrease in dissolved oxygen in coastal waters (OEHHA 2018).

Impacts of climate change on biological systems, including humans, wildlife, and vegetation, have also been observed, including climate change impacts on terrestrial, marine, and freshwater ecosystems. As with global observations, species responses include those consistent with warming: elevational or latitudinal shifts in range, changes in the timing of key plant and animal life cycle events, and changes in the abundance of species and in community composition. Humans are better able to adapt to a changing climate than plants and animals in natural ecosystems. Nevertheless, climate change poses a threat to public health as warming temperatures and changes in precipitation can affect vector-borne pathogen transmission and disease patterns in California as well as the variability of heat-related deaths and illnesses. In addition, since 1950, the area burned by wildfires each year has followed an increasing trend overall.

- CNRA has released four California Climate Change Assessments (in 2006, 2009, 2012, and 2018), which have addressed the following: acceleration of warming across the state, more intense and frequent heat waves, greater riverine flows, accelerating sea level rise, more intense and frequent drought, more severe and frequent wildfires, more severe storms and extreme weather events, shrinking snowpack and less overall precipitation, and ocean acidification, hypoxia, and warming. To address local and regional governments' need for information to support action in their communities, the Fourth Assessment (CNRA 2018) includes reports for nine regions of the state. Key highlights for the San Diego Region (include the following (CNRA 2018):Temperature is projected to increase substantially, along with mean temperature, heat wave frequency will increase, with more intensity and longer duration.
- Precipitation will remain highly variable but will change in character, with wetter winters, drier springs, and more frequent and severe droughts punctuated by more intense individual precipitation events.
- Wildfire risk will increase in the future as climate warms. The risk for large catastrophic wildfires driven by Santa Ana wind events will also likely increase as a result of a drier autumns leading to low antecedent precipitation before the height of the Santa Ana wind season.
- The sea level along San Diego County is expected to rise. High tides combined with elevated shoreline water levels produced by locally and distantly driven wind-driven waves will drive extreme events. Longer-term sea level will increase rapidly in the second half of the century and will be punctuated by short periods of storm-driven extreme sea levels that will imperil existing infrastructure, structures, and ecosystems with increasing frequency.

2.2 Regulatory Setting

2.2.1 Federal

Massachusetts v. EPA. In *Massachusetts v. EPA* (April 2007), the U.S. Supreme Court directed the EPA administrator to determine whether GHG emissions from new motor vehicles cause or contribute to air pollution that may reasonably be anticipated to endanger public health or welfare, or whether the science is too uncertain to make a reasoned decision. In December 2009, the administrator signed a final rule with the following two distinct findings regarding GHGs under Section 202(a) of the federal Clean Air Act:

- The Administrator found that elevated concentrations of GHGs—CO2, CH4, N2O, HFCs, PFCs, and SF6—in the atmosphere threaten the public health and welfare of current and future generations. This is the "endangerment finding."
- The Administrator further found the combined emissions of GHGs—CO2, CH4, N2O, and HFCs—from new motor vehicles and new motor vehicle engines contribute to the GHG air pollution that endangers public health and welfare. This is the "cause or contribute finding."

These two findings were necessary to establish the foundation for regulation of GHGs from new motor vehicles as air pollutants under the Clean Air Act.

Energy Independence and Security Act. The Energy Independence and Security Act of 2007 (December 2007), among other key measures, would do the following, which would aid in the reduction of national GHG emissions:

1. Increase the supply of alternative fuel sources by setting a mandatory Renewable Fuel Standard requiring fuel producers to use at least 36 billion gallons of biofuel by 2022.
2. Set a target of 35 miles per gallon for the combined fleet of cars and light trucks by model year 2020 and direct National Highway Traffic Safety Administration (NHTSA) to establish a fuel economy program for medium- and heavy-duty trucks and create a separate fuel economy standard for work trucks.
3. Prescribe or revise standards affecting regional efficiency for heating and cooling products and procedures for new or amended standards, energy conservation, energy efficiency labeling for consumer electronic products, residential boiler efficiency, electric motor efficiency, and home appliances.

Federal Vehicle Standards. In response to a U.S. Supreme Court ruling, the Bush Administration issued Executive Order (EO) 13432 in 2007 directing the EPA, the Department of Transportation, and the Department of Energy to establish regulations that reduce GHG emissions from motor vehicles, non-road vehicles, and non-road engines by 2008. In 2009, the NHTSA issued a final rule regulating fuel efficiency and GHG emissions from cars and light-duty trucks for model year 2011, and in 2010, the EPA and NHTSA issued a final rule regulating cars and light-duty trucks for model years 2012–2016 (75 FR 25324–25728).

In 2010, President Barack Obama issued a memorandum directing the Department of Transportation, Department of Energy, EPA, and NHTSA to establish additional standards regarding fuel efficiency and GHG reduction, clean fuels, and advanced vehicle infrastructure. In response to this directive, the EPA and NHTSA proposed stringent, coordinated federal GHG and fuel economy standards for model years 2017–2025 light-duty vehicles. The proposed standards projected to achieve 163 grams per mile of CO_2 by model year 2025 on an average industry fleet-wide basis, which is equivalent to 54.5 miles per gallon if this level were achieved solely through fuel efficiency. The final rule was adopted in 2012 for model years 2017–2021 (77 FR 62624–63200). On January 12, 2017, the EPA finalized its decision to maintain the current GHG emissions standards for model years 2022–2025 cars and light trucks (EPA 2022c).

In addition to the regulations applicable to cars and light-duty trucks described above, in 2011, the EPA and NHTSA announced fuel economy and GHG standards for medium- and heavy-duty trucks for model years 2014–2018 (76 FR 57106–57513). The standards for CO_2 emissions and fuel consumption are tailored to three main vehicle categories: combination tractors, heavy-duty pickup trucks and vans, and vocational vehicles. According to the EPA, this regulatory program will reduce GHG emissions and fuel consumption for the affected vehicles by 6%–23% over the 2010 baselines.

In August 2016, the EPA and NHTSA announced the adoption of the phase two program related to the fuel economy and GHG standards for medium- and heavy-duty trucks. The phase two program will apply to vehicles with model year 2018 through 2027 for certain trailers, and model years 2021 through 2027 for semi-trucks, large pickup trucks, vans, and all types and sizes of buses and work trucks. The final standards are expected to lower CO_2 emissions by approximately 1.1 billion MT and reduce oil consumption by up to 2 billion barrels over the lifetime of the vehicles sold under the program (EPA and NHTSA 2016).

In August 2018, the EPA and NHTSA proposed to amend certain fuel economy and GHG standards for passenger cars and light trucks and establish new standards for model years 2021 through 2026. Compared to maintaining the post-2020 standards in place at the time, the 2018 proposal would increase U.S. fuel consumption by about half a million barrels per day (2%–3% of total daily consumption, according to the Energy Information Administration) and would impact the global climate by 3/1000th of 1°C by 2100 (EPA and NHTSA 2018). California and other states have stated their intent to challenge federal actions that would delay or eliminate GHG reduction measures, and have committed to cooperating with other countries to implement global climate change initiatives.

In 2019, the EPA and NHTSA published the Safer Affordable Fuel-Efficient Vehicles Rule Part One: One National Program (SAFE-1), which revoked California's authority to set its own GHG emissions standards and set zero-emission vehicle (ZEV) mandates in California. In March 2020, Part Two was issued which set CO2 emissions standards and corporate average fuel economy standards for passenger vehicles and light-duty trucks for model years 2021 through 2026. In response to EO 13990, on December 21, 2021, NHTSA finalized the CAFE Preemption rulemaking to withdraw its portions of the Part One Rule. The final rule concluded that the Part One Rule overstepped the agency's legal authority and established overly broad prohibitions that did not account for a variety of important state and local interests.

Then, in March 2022, NHTSA established new fuel economy standards that would require an industry-wide fleet average of approximately 49 miles per gallon for passenger cars and light trucks in model year 2026, by increasing fuel efficiency by 8% annually for model years 2024 and 2025, and 10% annually for model year 2026.

Inflation Reduction Act of 2022. The Inflation Reduction Act was signed into law by President Biden in August 2022. The bill includes specific investment in energy and climate reform and is projected to reduce GHG emissions within the U.S. by 40% as compared to 2005 levels by 2030. The bill allocates funds to boost renewable energy infrastructure (e.g., solar panels and wind turbines), includes tax credits for the purchase of electric vehicles, and includes measures that will make homes more energy efficient.

2.2.2 State

The statewide GHG emissions regulatory framework is summarized below by category: state climate change targets, building energy, renewable energy and energy procurement, mobile sources, solid waste, water, and other state regulations and goals. The following text describes executive orders (EO), legislation [assembly bills (AB) and senate bills (SB)], regulations, and other plans and policies that would directly or indirectly reduce GHG emissions and/or address climate change issues.

State Climate Change Targets

The state has taken a number of actions to address climate change. These include executive orders, legislation, and CARB plans and requirements. These are summarized below.

EO S-3-05. EO S-3-05 (June 2005) established the following statewide goals: GHG emissions should be reduced to 2000 levels by 2010, GHG emissions should be reduced to 1990 levels by 2020, and GHG emissions should be reduced to 80% below 1990 levels by 2050.

EO S-3-05 also directed the California EPA to report biannually on progress made toward meeting the GHG targets and the impacts to California due to global warming, including impacts to water supply, public health, agriculture, the coastline, and forestry. The Climate Action Team was formed, which subsequently issued reports from 2006 to 2010 (CAT 2016).

AB 32. In furtherance of the goals established in EO S-3-05, the legislature enacted AB 32 (Núñez and Pavley). The bill is referred to as the California Global Warming Solutions Act of 2006 (September 27, 2006). AB 32 provided initial direction on creating a comprehensive multiyear program to limit California's GHG emissions at 1990 levels by 2020 and initiate the transformations required to achieve the state's long-range climate objectives.

EO B-30-15. EO B-30-15 (April 2015) identified an interim GHG reduction target in support of targets previously identified under EO S-3-05 and AB 32. EO B-30-15 set an interim target goal of reducing statewide GHG emissions to 40% below 1990 levels by 2030 to keep California on its trajectory toward meeting or exceeding the long-term goal of reducing statewide GHG emissions to 80% below 1990 levels by 2050, as set forth in EO S-3-05. To facilitate achievement of this goal, EO B-30-15 calls for an update to CARB's Scoping Plan to express the 2030 target in terms of MMT CO_2e. The executive order also calls for state agencies to continue to develop and implement GHG emissions reduction programs in support of the reduction targets. Sector-specific agencies in transportation, energy, water, and forestry were required to prepare GHG reduction plans by September 2015, followed by a report on action taken in relation to these plans in June 2016. EO B-30-15 does not require local agencies to take any action to meet the new interim GHG reduction target.

SB 32 and AB 197. SB 32 and AB 197 (enacted in 2016) are companion bills that set a new statewide GHG reduction targets, make changes to CARB's membership and increase legislative oversight of CARB's climate change-based activities, and expand dissemination of GHG and other air-quality-related emissions data to enhance transparency and accountability. More specifically, SB 32 codified the 2030 emissions reduction goal of EO B-30-15 by requiring CARB to ensure that statewide GHG emissions are reduced to 40% below 1990 levels by 2030. AB 197 established the Joint Legislative Committee on Climate Change Policies, consisting of at least three members of the Senate and three members of the Assembly to provide ongoing oversight over implementation of the state's climate policies. AB 197 also added two members of the Legislature to CARB as nonvoting members; requires CARB to make available and update (at least annually via its website) emissions data for GHGs, criteria air pollutants, and TACs from reporting facilities; and requires CARB to identify specific information for GHG emissions reduction measures when updating the Scoping Plan.

EO B-55-18. EO B-55-18 (September 2018) establishes a statewide policy for the state to achieve carbon neutrality as soon as possible, and no later than 2045, and achieve and maintain net-negative emissions thereafter. The goal is an addition to the existing statewide targets of reducing the state's GHG emissions. CARB will work with relevant state agencies to ensure that future scoping plans identify and recommend measures to achieve the carbon neutrality goal.

Assembly Bill 1279. The Legislature enacted AB 1279, the California Climate Crisis Act, in September 2022. The bill declares the policy of the state to achieve net zero GHG emissions as soon as possible, but no later than 2045, and achieve and maintain net negative GHG emissions thereafter. Additionally, the bill requires that by 2045, statewide anthropogenic GHG emissions be reduced to at least 85% below 1990 levels. Although AB 1279 establishes an overall policy to achieve net zero greenhouse gas emissions as soon as possible, but no later than 2045, recognizing the need to implement carbon dioxide removal and carbon capture, utilization and storage technologies, the Legislature established a specific target of 85% below 1990 levels by 2045 for anthropogenic GHG emissions. Therefore, the net zero target does not directly apply to development projects, but the 2045 target of 85% below 1990 levels represents the reductions required to contribute to accomplishing the State's overall net zero policy.

California Air Resources Board's Climate Change Scoping Plan. One specific requirement of AB 32 was for CARB to prepare a scoping plan for achieving the maximum technologically feasible and cost-effective GHG emission reductions by 2020 (Health and Safety Code Section 38561[a]), and to update the plan at least once every 5 years. In 2008, CARB approved the first scoping plan. The Climate Change Scoping Plan: A Framework for Change (Scoping Plan) included a mix of recommended strategies that combined direct regulations, market-based approaches, voluntary measures, policies, and other emission reduction programs calculated to meet the 2020 statewide GHG emissions limit and initiate the transformations needed to achieve the state's long-range climate objectives. The key elements of the Scoping Plan include the following (CARB 2008):

1. Expanding and strengthening existing energy efficiency programs, as well as building and appliance standards.
2. Achieving a statewide renewable energy mix of 33%.
3. Developing a California cap-and-trade program that links with other Western Climate Initiative partner programs to create a regional market system and caps sources contributing 85% of California's GHG emissions.
4. Establishing targets for transportation-related GHG emissions for regions throughout California, and pursuing policies and incentives to achieve those targets.
5. Adopting and implementing measures pursuant to existing state laws and policies, including California's clean car standards, goods movement measures, and the Low Carbon Fuel Standard (17 CCR 95480 et seq.).
6. Creating targeted fees, including a public goods charge on water use, fees on high GWP gases, and a fee to fund the administrative costs of the State of California's long-term commitment to AB 32 implementation.

The Scoping Plan also identified local governments as essential partners in achieving California's goals to reduce GHG emissions because they have broad influence and, in some cases, exclusive authority over activities that contribute to significant direct and indirect GHG emissions through their planning and permitting processes, local ordinances, outreach and education efforts, and municipal operations. Specifically, the Scoping Plan encouraged local governments to adopt a reduction goal for municipal operations, and for community emissions to reduce GHGs by approximately 15% from then levels (2008) by 2020. Many local governments developed community-scale local GHG reduction plans based on this Scoping Plan recommendation.

In 2014, CARB approved the first update to the Scoping Plan. The First Update to the Climate Change Scoping Plan: Building on the Framework (First Update) defined the state's GHG emission reduction priorities for the next 5 years, and laid the groundwork to start the transition to the post-2020 goals set forth in EO S-3-05 and EO B-16-2012.

The First Update concluded that California is on track to meet the 2020 target but recommended a 2030 mid-term GHG reduction target be established to ensure a continuum of action to reduce emissions. The First Update recommended a mix of technologies in key economic sectors to reduce emissions through 2050, including energy demand reduction through efficiency and activity changes; large-scale electrification of on-road vehicles, buildings, and industrial machinery; decarbonizing electricity and fuel supplies; and the rapid market penetration of efficient and clean energy technologies. As part of the First Update, CARB recalculated the state's 1990 emissions level, using more recent GWPs identified by the IPCC, from 427 MMT CO_2e to 431 MMT CO_2e (CARB 2014).

In 2015, as directed by EO B-30-15, CARB began working on an update to the Scoping Plan to incorporate the 2030 target of 40% below 1990 levels by 2030 to keep California on its trajectory toward meeting or exceeding the long-term goal of reducing GHG emissions to 80% below 1990 levels by 2050 as set forth in EO S-3-05. The governor called on California to pursue a new and ambitious set of strategies, in line with the five climate change pillars from his inaugural address, to reduce GHG emissions and prepare for the unavoidable impacts of climate change. In the summer of 2016, the legislature affirmed the importance of addressing climate change through passage of SB 32.

In December 2017, CARB adopted California's 2017 Climate Change Scoping Plan (2017 Scoping Plan) for public review and comment (CARB 2017). The 2017 Scoping Plan builds on the successful framework established in the initial Scoping Plan and First Update while identifying new, technologically feasible and cost-effective strategies that will serve as the framework to achieve the 2030 GHG target as established by SB 32 and define the state's climate change priorities to 2030 and beyond. The strategies' commitments include implementing renewable energy and energy efficiency strategies (including the mandates of SB 350), increasing stringency of the Low Carbon Fuel Standard, implementing measures identified in the Mobile Source and Freight Strategies, implementing measures identified in the proposed Short-Lived Climate Pollutant Reduction Strategy, and increasing stringency of SB 375 targets. To fill the gap in additional reductions needed to achieve the 2030 target, it recommends continuing the Cap-and-Trade Program and a measure to reduce GHGs from refineries by 20%.

For local governments, the 2017 Scoping Plan replaced the initial Scoping Plan's 15% reduction goal with a recommendation to aim for a community-wide goal of no more than 6 MT CO_2e per capita by 2030, and no more than 2 MT CO_2e per capita by 2050, which are consistent with the state's long-term goals. These goals are also consistent with the Under 2 Memorandum of Understanding (Under 2 2016) and the Paris Agreement, which are developed around the scientifically based levels necessary to limit global warming to below 2°C. The 2017 Scoping Plan recognized the benefits of local government GHG planning (e.g., through CAPs) and provided more information regarding tools CARB is working on to support those efforts. It also recognized the CEQA streamlining provisions for project-level review where there is a legally adequate CAP.[3]

The Scoping Plan recommends strategies for implementation at the statewide level to meet the goals of AB 32, SB 32, and the executive orders, and establishes an overall framework for the measures that will be adopted to reduce California's GHG emissions. A project is considered consistent with the statutes and executive orders if it meets the general policies in reducing GHG emissions to facilitate the achievement of the state's goals and does not impede attainment of those goals. A project would be consistent if it will further the objectives and not obstruct their attainment.

CARB adopted the 2022 Scoping Plan Update in December 2022, which outlines the state's plan to reach carbon neutrality by 2045 or earlier, while also assessing the progress the state is making toward reducing GHG emissions

[3] *Sierra Club v. County of Napa* (2004) 121 Cal.App.4th 1490; *San Francisco Tomorrow et al. v. City and County of San Francisco* (2015) 229 Cal.App.4th 498; *San Franciscans Upholding the Downtown Specific Plan v. City and County of San Francisco* (2002) 102 Cal.App.4th 656; *Sequoyah Hills Homeowners Assn. v. City of Oakland* (1993) 23 Cal.App.4th 704, 719.

by at least 40% below 1990 levels by 2030, as is required by SB 32 and laid out in the Second Update. The carbon neutrality goal requires CARB to expand proposed actions from only the reduction of anthropogenic sources of GHG emissions to also include those that capture and store carbon (e.g., through natural and working lands, or mechanical technologies). The carbon reduction programs build on and accelerate those currently in place, including moving to zero-emission transportation; phasing out use of fossil gas use for heating homes and buildings; reducing chemical and refrigerants with high GWP; providing communities with sustainable options for walking, biking, and public transit; displacement of fossil-fuel fired electrical generation through use of renewable energy alternatives (e.g., solar arrays and wind turbines); and scaling up new options such as green hydrogen (CARB 2022b).

The 2022 Scoping Plan also emphasizes that there is no realistic path to carbon neutrality without carbon removal and sequestration, and to achieve the state's carbon neutrality goal, carbon reduction programs must be supplemented by strategies to remove and sequester carbon. Strategies for carbon removal and sequestration include carbon capture and storage from anthropogenic point sources, where CO_2 is captured as it leaves a facility's smokestack and is injected into geologic formations or used in industrial materials (e.g., concrete); and carbon dioxide removal from ambient air, through mechanical (e.g., direct air capture with sequestration) or nature-based (e.g., management of natural and working lands) applications.

The 2022 Scoping Plan included Appendix D, Local Actions, which includes recommendations intended to build momentum for local government actions that align with the State's climate goals, with a focus on local GHG reduction strategies (commonly referred to as climate action planning) and approval of new land use development projects, including through environmental review under CEQA. The recommendations provided in Appendix D are non-binding and should not be interpreted as a directive to local governments, but rather as evidence-based analytical tools to assist local governments with their role as essential partners in achieving California's climate goals. Appendix D recognizes consistency with a CEQA-qualified GHG reduction plan such as a Climate Action Plan as a preferred option for evaluating potential GHG emission impacts under CEQA. Absent a qualified GHG reduction plan, Appendix D provides additional potential threshold options including key attributes that residential and mixed-use projects should achieve that would align with the State's climate goals, a net-zero threshold, and use of air district recommended thresholds of significance.[4]

SB 605 and SB 1383. SB 605 (2014) required CARB to complete a comprehensive strategy to reduce emissions of short-lived climate pollutants in the state, and SB 1383 (2016) required CARB to approve and implement that strategy by January 1, 2018. The Short-Lived Climate Pollutants Reduction Strategy was approved by CARB in March 2017, and lays out a range of options to reduce short-lived climate pollutant emissions in California, including regulations, incentives, and other market-supporting activities. SB 1383 also establishes specific targets for the reduction of short-lived climate pollutants (40% below 2013 levels by 2030 for CH_4 and HFCs, and 50% below 2013 levels by 2030 for anthropogenic black carbon), and provides direction for reductions from dairy and livestock operations and landfills. Accordingly, and as mentioned above, CARB adopted its Short-Lived Climate Pollutant Reduction Strategy in March 2017. This strategy establishes a framework for the statewide reduction of emissions of black carbon, CH_4, and fluorinated gases.

4 The threshold approaches outlined in the 2022 Scoping Plan, Appendix D, are recommendations only and are not requirements; they do not supplant lead agencies' discretion to develop their own evidence-based approaches for determining whether a project would have a potentially significant impact on GHG emissions.

Building Energy

Title 24, Part 6. Title 24 of the California Code of Regulations was established in 1978 and serves to enhance and regulate California's building standards. Although not initially promulgated to reduce GHG emissions, Part 6 of Title 24 specifically established Building Energy Efficiency Standards that are designed to ensure new and existing buildings in California achieve energy efficiency and preserve outdoor and indoor environmental quality. These energy efficiency standards are reviewed every few years by the Building Standards Commission and CEC, and revised if necessary (California Public Resources Code [PRC] Section 25402[b][1]). The regulations receive input from members of industry and the public, with the goal of "reducing of wasteful, uneconomic, inefficient, or unnecessary consumption of energy" (PRC Section 25402). These regulations are carefully scrutinized and analyzed for technological and economic feasibility (PRC Section 25402[d]) and cost effectiveness (PRC Sections 25402[b][2] and [b][3]). As a result, these standards save energy, increase electricity supply reliability, increase indoor comfort, avoid the need to construct new power plants, and help preserve the environment.

The 2022 Title 24 standards are the currently applicable building energy efficiency standards, and became effective on January 1, 2023. The 2022 Title 24 standards improve upon the 2019 standards for new construction of, and additions and alterations to, residential and nonresidential buildings. The CEC adopted the 2022 Title 24 Energy Code in August 2021 and the California Building Standards Commission approved incorporating the updated code into the California Building Standards Code (CALGreen) in December 2021. The 2022 Energy Code went into effect on January 1, 2023. The 2022 Energy Code focuses on four key areas in newly constructed homes and businesses:

- Encouraging electric heat pump technology for space and water heating, which consumes less energy and produces fewer emissions than gas-powered units.
- Establishing electric-ready requirements for single-family homes to position owners to use cleaner electric heating, cooking, and electric vehicle (EV) charging options whenever they choose to adopt those technologies.
- Expanding solar photovoltaic (PV) system and battery storage standards to make clean energy available onsite and complement the state's progress toward a 100% clean electricity grid.
- Strengthening ventilation standards to improve indoor air quality.

Title 24, Part 11. In addition to the CEC's efforts, in 2008, the California Building Standards Commission adopted the nation's first green building standards. The California Green Building Standards Code (Part 11 of Title 24) is commonly referred to as California's Green Building Standards (CALGreen), and establishes minimum mandatory standards and voluntary standards pertaining to the planning and design of sustainable site development, energy efficiency (in excess of the California Energy Code requirements), water conservation, material conservation, and interior air quality. The CALGreen standards took effect in January 2011 and instituted mandatory minimum environmental performance standards for all ground-up, new construction of commercial, low-rise residential and state-owned buildings, schools, and hospitals. The CALGreen 2022 standards, which are the current standards, became effective January 1, 2023.

Title 20. Title 20 of the California Code of Regulations requires manufacturers of appliances to meet state and federal standards for energy and water efficiency. Performance of appliances must be certified through the CEC to demonstrate compliance with standards. New appliances regulated under Title 20 include refrigerators, refrigerator-freezers, and freezers; room air conditioners and room air-conditioning heat pumps; central air conditioners; spot air conditioners; vented gas space heaters; gas pool heaters; plumbing fittings and plumbing fixtures; fluorescent lamp ballasts; lamps; emergency lighting; traffic signal modules; dishwaters; clothes washers and dryers; cooking products; electric motors; low voltage dry-type distribution transformers; power supplies;

televisions and consumer audio and video equipment; and battery charger systems. Title 20 presents protocols for testing for each type of appliance covered under the regulations, and appliances must meet the standards for energy performance, energy design, water performance, and water design. Title 20 contains three types of standards for appliances: federal and state standards for federally regulated appliances, state standards for federally regulated appliances, and state standards for non-federally regulated appliances.

AB 1109. Enacted in 2007, AB 1109 required the CEC to adopt minimum energy efficiency standards for general-purpose lighting to reduce electricity consumption by 50% for indoor residential lighting and by 25% for indoor commercial lighting.

SB 1. SB 1 (Murray) (August 2006) established a $3 billion rebate program to support the goal of the state to install rooftop solar energy systems with a generation capacity of 3,000 megawatts through 2016. SB 1 added sections to the Public Resources Code, including Chapter 8.8 (California Solar Initiative), that require building projects applying for ratepayer-funded incentives for photovoltaic systems to meet minimum energy efficiency levels and performance requirements. Section 25780 established that it is a goal of the state to establish a self-sufficient solar industry. The goals included establishing solar energy systems as a viable mainstream option for homes and businesses within 10 years of adoption, and placing solar energy systems on 50% of new homes within 13 years of adoption. SB 1, also termed “Go Solar California,” was previously titled “Million Solar Roofs.”

California AB 1470 (Solar Water Heating). This bill established the Solar Water Heating and Efficiency Act of 2007. AB 1470 makes findings and declarations of the Legislature relating to the promotion of solar water heating systems and other technologies that reduce natural gas demand. AB 1470 defines several terms for purposes of the act. The bill required a commission to evaluate the data available from a specified pilot program, and to design and implement a program of incentives for the installation of 200,000 solar water heating systems in homes and businesses throughout the state by 2017.

Renewable Energy and Energy Procurement

SB 1078 (2002) established the Renewables Portfolio Standard (RPS) program, which requires an annual increase in renewable generation by the utilities.

Under the program, a renewable electrical generation facility is one that uses biomass, solar thermal, photovoltaic, wind, geothermal, fuel cells using renewable fuels, small hydroelectric generation of 30 megawatts or less, digester gas, municipal solid waste conversion, landfill gas, ocean wave, ocean thermal, or tidal current, and that meets other specified requirements with respect to its location.

SB 1368. SB 1368 (September 2006) required the CEC to develop and adopt regulations for GHG emission performance standards for the long-term procurement of electricity by local publicly owned utilities. These standards must be consistent with the standards adopted by the California Public Utilities Commission.

EO S-14-08. EO S-14-08 (November 2008) focused on the contribution of renewable energy sources to meet the electrical needs of California while reducing the GHG emissions from the electrical sector. This EO required that all retail suppliers of electricity in California serve 33% of their load with renewable energy by 2020. Furthermore, the EO directed state agencies to take appropriate actions to facilitate reaching this target. The California Natural Resources Agency (CNRA), through collaboration with the CEC and California Department of Fish and Wildlife (formerly the California Department of Fish and Game), was directed to lead this effort.

EO S-21-09 and SBX1-2. EO S-21-09 (September 2009) directed CARB to adopt a regulation consistent with the goal of EO S-14-08 by July 31, 2010. CARB was further directed to work with the California Public Utilities Commission and CEC to ensure that the regulation builds upon the RPS program and was applicable to investor-owned utilities, publicly owned utilities, direct access providers, and community choice providers. Under this order, CARB was to give the highest priority to those renewable resources that provide the greatest environmental benefits with the least environmental costs and impacts on public health and can be developed the most quickly in support of reliable, efficient, cost-effective electricity system operations. On September 23, 2010, CARB initially approved regulations to implement a Renewable Electricity Standard. However, this regulation was not finalized because of subsequent legislation (SB X1-2, Simitian, statutes of 2011) signed by Governor Brown in April 2011.

SB X1 2 expanded the Renewables Portfolio Standard by establishing a renewable energy target of 20% of the total electricity sold to retail customers in California per year by December 31, 2013, and 33% by December 31, 2020, and in subsequent years. Under the bill, a renewable electrical generation facility is one that uses biomass, solar thermal, photovoltaic, wind, geothermal, fuel cells using renewable fuels, small hydroelectric generation (30 megawatts or less), digester gas, municipal solid waste conversion, landfill gas, ocean wave, ocean thermal, or tidal current, and that meets other specified requirements with respect to its location.

SB X1-2 applies to all electricity retailers in the state including publicly owned utilities, investor-owned utilities, electricity service providers, and community choice aggregators. All of these entities must meet the renewable energy goals previously listed.

SB 350. SB 350 (October 2015, Clean Energy and Pollution Reduction Act) further expanded the RPS by establishing a goal of 50% of the total electricity sold to retail customers in California per year by December 31, 2030. In addition, SB 350 included the goal to double the energy efficiency savings in electricity and natural gas final end uses (e.g., heating, cooling, lighting, or class of energy uses on which an energy-efficiency program is focused) of retail customers through energy conservation and efficiency. The bill also requires the California Public Utilities Commission, in consultation with the CEC, to establish efficiency targets for electrical and gas corporations consistent with this goal. Regarding mobile sources, as one of its elements, SB 350 establishes a statewide policy for widespread electrification of the transportation sector, recognizing that such electrification is required for achievement of the state's 2030 and 2050 reduction targets (see California Public Utilities Code Section 740.12).

SB 100. SB 100 (2018) increased the standards set forth in SB 350 establishing that 44% of the total electricity sold to retail customers in California per year by December 31, 2024, 52% by December 31, 2027, and 60% by December 31, 2030, be secured from qualifying renewable energy sources. SB 100 states that it is the policy of the state that eligible renewable energy resources and zero-carbon resources supply 100% of the retail sales of electricity to California. This bill requires that the achievement of 100% zero-carbon electricity resources do not increase the carbon emissions elsewhere in the western grid and that the achievement not be achieved through resource shuffling.

SB 1020. SB 1020 (September 2022) revises the standards from SB 100, requiring the following percentage of retail sales of electricity to California end-use customers come from eligible renewable energy resources and zero-carbon resources: 90% by December 31, 2035; 95% by December 31, 2040; and 100% by December 31, 2045.

Mobile Sources

State Vehicle Standards (AB 1493 and EO B-16-12). AB 1493 (July 2002) was enacted in a response to the transportation sector accounting for more than half of California's CO_2 emissions. AB 1493 required CARB to set GHG emission standards for passenger vehicles, light-duty trucks, and other vehicles determined by the state board to be vehicles that are primarily used for noncommercial personal transportation in the state. The bill required that CARB set GHG emission standards for motor vehicles manufactured in 2009 and all subsequent model years. CARB adopted the standards in September 2004. EO B-16-12 (March 2012) required that state entities under the governor's direction and control support and facilitate the rapid commercialization of zero-emissions vehicles. It ordered CARB, CEC, California Public Utilities Commission, and other relevant agencies to work with the Plug-in Electric Vehicle Collaborative and the California Fuel Cell Partnership to establish benchmarks to help achieve benchmark goals by 2015, 2020, and 2025. On a statewide basis, EO B-16-12 established a target reduction of GHG emissions from the transportation sector equaling 80% less than 1990 levels by 2050. This directive did not apply to vehicles that have special performance requirements necessary for the protection of the public safety and welfare.

As also explained in Section 3.2.1, "Federal Vehicle Standards", in March 2022, EPA reinstated California's authority under the Clean Air Act to implement its own GHG emission standards and ZEV sales mandate. EPA's action concludes its reconsideration of the 2019 SAFE-1 rule by finding that the actions taken under the previous administration as a part of SAFE-1 were decided in error and are now entirely rescinded.

EO S-1-07. Issued on January 18, 2007, EO S-1-07 sets a declining Low Carbon Fuel Standard for GHG emissions measured in CO_2e grams per unit of fuel energy sold in California. The initial target of the Low Carbon Fuel Standard was to reduce the carbon intensity of California passenger vehicle fuels by at least 10% by 2020. The Low Carbon Fuel Standard was subsequently amended in 2018 to require a 20% reduction in carbon intensity by 2030. This new requirement aligns with the California's overall 2030 target of reducing climate changing emissions to 40% below 1990 levels by 2030, set by SB 32. CARB has adopted implementing regulations for both the 10% and 20% carbon intensity reduction targets.

SB 375. SB 375 (2008) addresses GHG emissions associated with the transportation sector through regional transportation and sustainability plans. SB 375 required CARB to adopt regional GHG reduction targets for the automobile and light-truck sector for 2020 and 2035. Regional metropolitan planning organizations are then responsible for preparing a Sustainable Communities Strategy (SCS) within their Regional Transportation Plan (RTP). The goal of the SCS is to establish a forecasted development pattern for the region that, after considering transportation measures and policies, will achieve, if feasible, the GHG reduction targets. If an SCS is unable to achieve the GHG reduction target, a metropolitan planning organization must prepare an Alternative Planning Strategy demonstrating how the GHG reduction target would be achieved through alternative development patterns, infrastructure, or additional transportation measures or policies.

Pursuant to California Government Code Section 65080(b)(2)(K), an SCS does not regulate the use of land; supersede the land use authority of cities and counties; or require that a city's or county's land use policies and regulations, including those in a general plan, be consistent with it. Nonetheless, SB 375 makes regional and local planning agencies responsible for developing those strategies as part of the federally required metropolitan transportation planning process and the state-mandated housing element process.

In 2010, CARB adopted the SB 375 targets for the regional metropolitan planning organizations. The targets adopted for SANDAG in 2010 are a 7% reduction in per-capita passenger-vehicle GHG emissions by 2020 and a

13% reduction by 2035, measured relative to 2005 GHG emissions. In 2018, CARB adopted the second round of SB 375 reduction targets, and increased SANDAG's 2020 target to a 15% reduction in per-capita passenger-vehicle GHG emissions, and the 2035 target to a 19% reduction using the same 2005 baseline.

SANDAG completed and adopted its 2050 RTP/SCS in October 2011. In November 2011, CARB, by resolution, accepted SANDAG's GHG emissions quantification analysis and determination that, if implemented, the SCS would achieve CARB's 2020 and 2035 GHG emissions reduction targets for the region.

After SANDAG's 2050 RTP/SCS was adopted, a lawsuit was filed by the Cleveland National Forest Foundation and others (*Cleveland National Forest Foundation v. San Diego Association of Governments* (2017) 3 Cal. 5th 497). regarding analysis of EO S-3-05's 2050 goal of an 80% reduction in GHG emissions from 1990 levels. The Supreme Court of California held that the Environmental Impact Report at issue was sufficient to inform the public, based on the information available at the time, about the regional plan's GHG impacts and its potential inconsistency with state climate change goals without including an explicit analysis of the consistency of projected 2050 GHG emissions with the goals in the executive order.

In 2015, SANDAG adopted the next iteration of its RTP/SCS in accordance with statutorily mandated timelines and no subsequent litigation challenge was filed. More specifically, in October 2015, SANDAG adopted San Diego Forward: The Regional Plan (SANDAG 2015). Like the 2050 RTP/SCS, San Diego Forward: Regional Plan meets CARB's 2020 and 2035 reduction targets for the region (SANDAG 2015). In December 2015, CARB, by resolution, accepted SANDAG's GHG emissions quantification analysis and determination that, if implemented, the SCS would achieve CARB's 2020 and 2035 GHG emissions reduction targets for the region. The Regional Plan was updated in 2021, which was the result of years of planning, data analysis, and community engagement to reimagine the San Diego region with a transformative transportation system, a sustainable pattern of growth and development, and innovative demand and management strategies (SANDAG 2021).

Advanced Clean Cars Program. The Advanced Clean Cars program (January 2012) is an emissions-control program for model years 2015 through 2025. The program combines the control of smog- and soot-causing pollutants and GHG emissions into a single coordinated package. The package includes elements to reduce smog-forming pollution, reduce GHG emissions, promote clean cars, and provide the fuels for clean cars. To improve air quality, CARB implemented new emission standards to reduce smog-forming emissions beginning with 2015 model year vehicles. It is estimated that by 2025, cars will emit 75% less smog-forming pollution than the average new car sold in 2012. To reduce GHG emissions, CARB, in conjunction with the EPA and NHTSA, adopted new GHG standards for model year 2017 to 2025 vehicles; the new standards are estimated to reduce GHG emissions by 34% in 2025. The zero-emissions vehicle (ZEV) program will act as the focused technology of the Advanced Clean Cars program by requiring manufacturers to produce increasing numbers of ZEVs and plug-in hybrid electric vehicles in the 2018 to 2025 model years.

The ACC II program establishes the next set of LEV and ZEV requirements for model years after 2025 to contribute to meeting federal ambient air quality ozone standards and California's carbon neutrality standards (CARB 2022c). The ACC II rulemaking package also considers technological feasibility, environmental impacts, equity, economic impacts, and consumer impacts. The ACC II regulations were approved by the California Office of Administrative Law (OAL) and became effective on November 30, 2022.

AB 1236. AB 1236 (October 2015) (Chiu) required a city, county, or city and county to approve an application for the installation of electric vehicle charging stations, as defined, through the issuance of specified permits unless the city or county makes specified written findings based on substantial evidence in the record that the proposed installation would have a specific, adverse impact upon the public health or safety, and there is no feasible method to satisfactorily mitigate or avoid the specific, adverse impact. AB 1236 provided for appeal of that decision to the planning commission, as specified. The bill provided that the implementation of consistent statewide standards to achieve the timely and cost-effective installation of electric vehicle charging stations is a matter of statewide concern. The bill required electric vehicle charging stations to meet specified standards. AB 1236 required a city, county, or city and county with a population of 200,000 or more residents to adopt an ordinance, by September 30, 2016, that created an expedited and streamlined permitting process for electric vehicle charging stations. The bill also required a city, county, or city and county with a population of fewer than 200,000 residents to adopt this ordinance by September 30, 2017.

EO N-79-20 (September 2020) requires CARB to develop regulations as follows: (1) Passenger vehicle and truck regulations requiring increasing volumes of new ZEVs sold in the State towards the target of 100% of in-State sales by 2035; (2) medium- and heavy-duty vehicle regulations requiring increasing volumes of new zero-emission trucks and buses sold and operated in the State towards the target of 100% of the fleet transitioning to zero-emission vehicles by 2045 everywhere feasible and for all drayage trucks to be zero emission by 2035; and (3) strategies, in coordination with other State agencies, the EPA and local air districts, to achieve 100% zero-emission from off-road vehicles and equipment operations in the State by 2035. EO N-79-20 called for the development of a Zero-Emissions Vehicle Market Development Strategy, which was released February 2021, to be updated every 3 years, that ensures coordination and implementation of the EO and outlines actions to support new and used ZEV markets. In addition, the EO specifies identification of near-term actions, and investment strategies, to improve clean transportation, sustainable freight, and transit options; and calls for development of strategies, recommendations, and actions by July 15, 2021, to manage and expedite the responsible closure and remediation of former oil extraction sites as the State transitions to a carbon-neutral economy.

Advanced Clean Trucks (ACT) Regulation. The purpose of the ACT Regulation (June 2020) is to accelerate the market for zero-emission vehicles in the medium- and heavy-duty truck sector and to reduce emissions NO_x, fine particulate matter, TACs, GHGs, and other criteria pollutants generated from on-road mobile sources (CARB 2022c). Requiring medium- and heavy-duty vehicles to transition to zero-emissions technology will reduce health risks to people living in and visiting California and is needed to help California meet established near- and long-term air quality and climate mitigation targets.

EO B-16-12. EO B-16-12 (2012) directs state entities under the Governor's direction and control to support and facilitate development and distribution ZEVs. On a statewide basis, EO B-16-12 also establishes a GHG emissions reduction target from the transportation sector equaling 80% less than 1990 levels by 2050. In furtherance of this executive order, the Governor convened an Interagency Working Group on ZEVs that has published multiple reports regarding the progress made on the penetration of ZEVs in the statewide vehicle fleet.

Solid Waste

AB 939, AB 341, AB 1826, and SB 1383. In 1989, AB 939, known as the Integrated Waste Management Act (PRC Sections 40000 et seq.), was passed because of the increase in waste stream and decrease in landfill capacity. The statute established the California Integrated Waste Management Board, which oversees a disposal reporting system. AB 939 mandated a reduction of waste being disposed of where jurisdictions were required to meet diversion goals of all solid waste through source reduction, recycling, and composting activities of 25% by 1995 and 50% by 2000.

AB 341 (Chapter 476, Statutes of 2011 [Chesbro]) amended the California Integrated Waste Management Act of 1989 to include a provision declaring that it is the policy goal of the state that not less than 75% of solid waste generated be source-reduced, recycled, or composted by 2020, and annually thereafter. In addition, AB 341 required the California Department of Resources Recycling and Recovery (CalRecycle) to develop strategies to achieve the state's policy goal. CalRecycle conducted several general stakeholder workshops and several focused workshops, and in August 2015 published a discussion document titled AB 341 Report to the Legislature, which identified five priority strategies that CalRecycle believed would assist the state in reaching the 75% goal by 2020, legislative and regulatory recommendations, and an evaluation of program effectiveness (CalRecycle 2015).

AB 1826 (Chapter 727, Statutes of 2014, effective 2016) requires businesses to recycle their organic waste (i.e., food waste, green waste, landscape and pruning waste, nonhazardous wood waste, and food-soiled paper waste that is mixed in with food waste) depending on the amount of waste they generate per week. This law also requires local jurisdictions across the state to implement an organic waste recycling program to divert organic waste generated by businesses, including multi-family residential dwellings that consist of five or more units. The minimum threshold of organic waste generation by businesses decreases over time, which means an increasingly greater proportion of the commercial sector will be required to comply.

SB 1383 (Chapter 395, Statutes of 2016) establishes targets to achieve a 50% reduction in the level of the Statewide disposal of organic waste from the 2014 level by 2020 and a 75% reduction by 2025. CalRecycle was granted the regulatory authority required to achieve the organic waste disposal reduction targets and establishes an additional target that not less than 20% of currently disposed edible food is recovered for human consumption by 2025 (CalRecycle 2019).

Water

EO B-29-15. In response to the ongoing drought in California, EO B-29-15 (April 2015) set a goal of achieving a statewide reduction in potable urban water usage of 25% relative to water use in 2013. The term of the executive order extended through February 28, 2016, although many of the directives have since become permanent water-efficiency standards and requirements. The executive order includes specific directives that set strict limits on water usage in the state. In response to EO B-29-15, the California Department of Water Resources modified and adopted a revised version of the Model Water Efficient Landscape Ordinance that, among other changes, significantly increased the requirements for landscape water use efficiency and broadened its applicability to include new development projects with smaller landscape areas.

EO B-37-16. Issued May 2016, EO B-37-16 directed the State Water Resources Control Board to adjust emergency water conservation regulations through the end of January 2017 to reflect differing water supply conditions across the state. The State Water Resources Control Board also developed a proposal to achieve a mandatory reduction of potable urban water usage that builds off the mandatory 25% reduction called for in EO B-29-15. The State Water Resources Control Board and Department of Water Resources will develop new, permanent water use targets that build on the existing state law requirements that the state achieve 20% reduction in urban water usage by 2020. EO B-37-16 also specifies that the State Water Resources Control Board permanently prohibit water-wasting practices such as hosing off sidewalks, driveways, and other hardscapes; washing automobiles with hoses not equipped with a shut-off nozzle; using non-recirculated water in fountains and other decorative water features; watering lawns in a manner that causes runoff, or within 48 hours after measurable precipitation; and irrigating ornamental turf on public street medians.

EO N-10-21. In response to a state of emergency due to severe drought conditions, EO N-10-21 (July 2021) called on all Californians to voluntarily reduce their water use by 15% from their 2020 levels. Actions suggested in EO N-10-21 include reducing landscape irrigation, running dishwashers and washing machines only when full, finding and fixing leaks, installing water-efficient showerheads, taking shorter showers, using a shut-off nozzle on hoses, and taking cars to commercial car washes that use recycled water.

Other State Regulations and Goals

SB 97. SB 97 (Dutton) (August 2007) directed the Governor's Office of Planning and Research to develop guidelines under CEQA for the mitigation of GHG emissions. In 2008, the Governor's Office of Planning and Research issued a technical advisory as interim guidance regarding the analysis of GHG emissions in CEQA documents. The advisory indicated that the lead agency should identify and estimate a project's GHG emissions, including those associated with vehicular traffic, energy consumption, water usage, and construction activities (OPR 2007). The advisory further recommended that the lead agency determine significance of the impacts and impose all mitigation measures necessary to reduce GHG emissions to a level that is less than significant. The CNRA adopted the CEQA Guidelines amendments in December 2009, which became effective in March 2010.

Under the amended CEQA Guidelines, a lead agency has the discretion to determine whether to use a quantitative or qualitative analysis or apply performance standards to determine the significance of GHG emissions resulting from a particular project (14 CCR 15064.4[a]). The CEQA Guidelines require a lead agency to consider the extent to which a project complies with regulations or requirements adopted to implement a statewide, regional, or local plan for the reduction or mitigation of GHG emissions (14 CCR 15064.4[b]). The CEQA Guidelines also allow a lead agency to consider feasible means of mitigating the significant effects of GHG emissions, including reductions in emissions through the implementation of project features or off-site measures. The adopted amendments do not establish a GHG emissions threshold, instead allowing a lead agency to develop, adopt, and apply its own thresholds of significance or those developed by other agencies or experts. The CNRA also acknowledged that a lead agency may consider compliance with regulations or requirements implementing AB 32 in determining the significance of a project's GHG emissions (CNRA 2009a).

With respect to GHG emissions, the CEQA Guidelines state in Section 15064.4(a) that lead agencies should "make a good faith effort, to the extent possible on scientific and factual data, to describe, calculate or estimate" GHG emissions. The CEQA Guidelines note that an agency may identify emissions by either selecting a "model or methodology" to quantify the emissions or by relying on "qualitative analysis or other performance-based standards" (14 CCR 15064.4[a]). Section 15064.4(b) states that the lead agency should consider the following when assessing the significance of impacts from GHG emissions on the environment: the extent a project may increase or reduce GHG emissions as compared to the existing environmental setting; whether the project emissions exceed a threshold of significance that the lead agency determines applies to the project; and the extent to which the project complies with regulations or requirements adopted to implement a statewide, regional, or local plan for the reduction or mitigation of GHG emissions (14 CCR 15064.4[b]).

EO S-13-08. EO Order S-13-08 (November 2008) is intended to hasten California's response to the impacts of global climate change, particularly sea-level rise. Therefore, the executive order directs state agencies to take specified actions to assess and plan for such impacts. The final 2009 California Climate Adaptation Strategy report was issued in December 2009 (CNRA 2009b), and an update, Safeguarding California: Reducing Climate Risk, followed in July 2014 (CNRA 2014). To assess the state's vulnerability, the report summarizes key climate change impacts to the state for the following areas: agriculture, biodiversity and habitat, emergency management, energy, forestry, ocean and coastal ecosystems and resources, public health, transportation, and water.

2.2.3 Local

City of Encinitas General Plan

The City of Encinitas's General Plan Resource Element includes goals and policies to reduce GHG emissions within the City (City of Encinitas 2011). The following goals and policies from the City's General Plan are relevant to the Project:

Resource Management Element

Goal 1: The City will conserve, protect, and enhance the water resources in the Planning Area.

- Policy 1.1: Require new development to utilize measures designed to conserve water in their construction.

Goal 9: The City will encourage the abundant use of natural and drought tolerant landscaping in new development and preserve natural vegetation, as much as possible, in undeveloped areas.

Goal 15: The City will make every effort to conserve energy in the City thus reducing our dependence on fossil fuels.

- Policy 15.1: The City will encourage the use of alternate energy systems, including passive solar and architectural and mechanical systems, in both commercial and residential development.
- Policy 15.2: The patterns of proposed subdivisions and the orientation and design of structures on lots shall be designed with the objective of maximizing the opportunities for solar energy use and energy conservation.
- Policy 15.3: Energy conserving construction standards and requirements shall be enforced in the field inspection of new construction.

City of Encinitas Climate Action Plan

In January 2018, the City adopted its Final CAP and certified the associated Final Negative Declaration. The 2018 CAP builds upon the goals of the 2011 CAP and provides a more recent inventory for the City (2012). With implementation of the CAP, the City aims to reduce emissions 13% below the baseline by 2020; 41% below the baseline, to approximately 7.8 MMT CO_2e, by 2030. With implementation of the CAP, it is anticipated that the City will meet the state GHG reduction targets and experience co-benefits such as climate adaption and healthier communities (City of Encinitas 2018).

The CAP was revised in 2020 and the City Council adopted the CAP update in November 2020. The CAP Update included a reevaluation of the City's 2030 GHG emissions projection to include anticipated increased housing units, establishment of more ambitious emissions reduction targets and development of more effective emissions reduction CAP measures and complimentary supporting measures. The CAP Update set a target of reducing GHG emissions by 44% below 2012 levels by 2030. (City of Encinitas 2020).

2.3 Significance Criteria and Methodology

2.3.1 Thresholds of Significance

Global climate change is a cumulative impact; a project participates in this potential impact through its incremental contribution combined with the cumulative increase of all other sources of GHGs. There are currently no established thresholds for assessing whether the GHG emissions of a project, such as the Project, would be considered a cumulatively considerable contribution to global climate change; however, all reasonable efforts should be made to minimize a project's contribution to global climate change. In addition, while GHG impacts are recognized exclusively as cumulative impacts (CAPCOA 2008), GHG emissions impacts must also be evaluated on a project-level under CEQA.

CEQA Guidelines

With respect to GHG emissions, the CEQA Guidelines Section 15064.4(a) states that lead agencies "shall make a good-faith effort, based to the extent possible on scientific and factual data, to describe, calculate or estimate" GHG emissions resulting from a project. The CEQA Guidelines note that an agency has the discretion to either quantify a project's GHG emissions or rely on a "qualitative analysis or performance-based standards" (14 CCR 15064.4[a]). A lead agency may use a "model or methodology" to estimate greenhouse gas emissions and has the discretion to select the model or methodology it considers "most appropriate to enable decision makers to intelligently take into account the project's incremental contribution to climate change" (14 CCR 15064.4[c]). The CEQA Guidelines provide that the lead agency should consider the following when determining the significance of impacts from GHG emissions on the environment (14 CCR 15064.4[b]):

1. The extent a project may increase or reduce GHG emissions as compared to the existing environmental setting.
2. Whether the project emissions exceed a threshold of significance that the lead agency determines applies to the project.
3. The extent to which the project complies with regulations or requirements adopted to implement a statewide, regional, or local plan for the reduction or mitigation of GHG emissions.

In addition, the CEQA Guidelines specify that "[w]hen adopting or using thresholds of significance, a lead agency may consider thresholds of significance previously adopted or recommended by other public agencies, or recommended by experts, provided the decision of the lead agency to adopt such thresholds is supported by substantial evidence" (14 CCR 15064.7[c]).

The extent to which a project increases or decreases GHG emissions in the existing environmental setting should be estimated in accordance with Section 15064.4, *Determining the Significance of Impacts from Greenhouse Gas Emissions*, of the State CEQA Guidelines. The State CEQA Guidelines indicate that when calculating GHG emissions resulting from a project, lead agencies shall make a good-faith effort based on scientific and factual data (Section 15064.4 (a)), and lead agencies have discretion to select the model or methodology deemed most appropriate for enabling decision makers to intelligently assess the project's incremental contribution to climate change (Section 15064.4 (c)).

The State CEQA Guidelines do not indicate an amount of GHG emissions that constitutes a significant impact on the environment. Instead, they authorize the lead agency to consider thresholds of significance previously adopted or recommended by other public agencies or recommended by experts, provided the decision of the lead agency to adopt such thresholds is supported by substantial evidence (State CEQA Guidelines Sections 15064.4(a) and 15064.7(c)). Several agencies throughout the state have drafted and/or adopted numerical threshold approaches and guidelines for analyzing the significance of project-related GHG emissions; however, no numerical thresholds have been formally adopted by an air district or lead agency for use in the San Diego region.

Governor's Office of Planning and Research

The Governor's Office of Planning and Research's Technical Advisory, titled Discussion Draft CEQA and Climate Change Advisory (OPR 2018), states the following:

> [N]either the CEQA statute nor the CEQA Guidelines prescribe thresholds of significance or particular methodologies for perming an impact analysis. This is left to lead agency judgment and discretion, based upon factual data and guidance from regulatory agencies and other sources where available and applicable. … Even in the absence of clearly defined thresholds for GHG emissions, such emissions must be disclosed and mitigated to the extent feasible whenever the lead agency determines that the project contributes to a significant, cumulative climate change impact.

Furthermore, the advisory document indicates that "in the absence of regulatory standards for GHG emissions or other scientific data to clearly define what constitutes a 'significant impact,' individual lead agencies may undertake a project-by-project analysis, consistent with available guidance and current CEQA practice." Section 15064.7(c) of the CEQA Guidelines specifies that "when adopting thresholds of significance, a lead agency may consider thresholds of significance previously adopted or recommended by other public agencies, or recommended by experts, provided the decision of the lead agency to adopt such thresholds is supported by substantial evidence."

Approaches to Determining Significance

The City has adopted an interim threshold based on the Bay Area Air Quality Management District's (BAAQMD) Justification Report: CEQA Thresholds for Evaluating the Significance of Climate Impacts. BAAQMD states its new climate change thresholds follow an approach endorsed by the Supreme Court in *Center for Biological Diversity v. Department of Fish & Wildlife* (2015) 62 Cal.4th 204. Under this approach, BAAQMD considers projects that do their "fair share" of what is required to meet the state's ambitious long-term climate goals to have a less-than-significant impact on climate change for CEQA purposes, and it defines the long-term climate goals as achieving carbon neutrality by 2045. BAAQMD finds that in order to do its required "fair share" a land use project must either be consistent with a robust local GHG reduction strategy meeting the criteria of CEQA Guidelines Section 15183.5(b) or it must include certain minimum design elements.

The City adopted a CAP in 2018 and updated the emission projects and 2030 target reduction in 2020. The City's CAP outlines actions and measures to reduce GHG emissions, including measures that must be implemented by development projects seeking building permits. The City's CAP meets the requirements set forth in CEQA Guidelines, Section 15183.5, whereby a lead agency (e.g., the City) may analyze and mitigate the significant effects of GHG emissions at a programmatic level, such as in a general plan, a long-range development plan, or a separate plan, to reduce GHG emissions. Pursuant to CEQA Guidelines Sections 15064(h)(3), 15130(d), and 15183(b), a project's incremental contribution to a cumulative GHG emissions effect may be determined not to be cumulatively considerable if it complies with the requirements of a CAP. GHG emissions are an inherently cumulative impact.

The City developed its Single Family Green Building Checklist (Checklist) to evaluate a single family residential project's consistency with the CAP. Projects that are consistent with the CAP, as determined through the use of the Checklist may rely on the CAP for the cumulative impact analysis of GHG emissions. The Checklist is intended to provide a streamlined review process for the GHG emissions analysis of proposed new single family development projects that are subject to discretionary review and trigger environmental review pursuant to CEQA. Pursuant to BAAQMD's "fair-share" approach, projects that are consistent with the City's CAP would not have a cumulatively considerable contribution to climate change. GHG emissions impacts and conflicts with GHG reduction plans would be less than significant.

GHG emissions are recognized exclusively as a cumulative impact (CAPCOA 2008). The CAP Consistency Checklist is used to determine project-level significance in accordance with CEQA Guidelines Section 15183.5; the measures in the CAP Consistency Checklist identify the specific requirements that must be implemented by development projects on a city-wide basis to achieve the City's identified reduction targets. The CAP addresses the cumulative impact of GHG emissions on a city-wide basis and a project's compliance with the CAP supports the City's GHG emission reduction goals.

BAAQMD's recommended GHG thresholds for showing a project achieves its "fair share" of GHG reductions includes implementation of specific design elements intended to help achieve carbon neutrality by 2045 or consistency with a local GHG reduction strategy that meets the criteria under CEQA Guidelines 15183.5(b).

As discussed above, the City's CAP meets the CEQA Guidelines criteria as a qualified GHG reduction plan under 15183.5(b) and is applied herein to the Project to determine its significance. As noted above, the City's Checklist for single family development is used solely to determine consistency with the CAP.

In accordance with Section 15064.4 of the State CEQA Guidelines, GHG emissions resulting from construction and operation of the project were quantitatively estimated. The GHG emissions associated with implementation of the project were estimated using industry standard and accepted software tools, techniques, and emissions factors. Estimation of emissions is for informational purposes only, for comparison with existing environmental conditions. The significance of the project's GHG impacts is based on the project's compliance with the City's CAP.

2.3.2 Approach and Methodology

2.3.2.1 Construction Mass Emissions

Emissions from the construction phase of Project components were estimated using the California Emissions Estimator Model (CalEEMod) Version 2022.1.1.13[5]. The Applicant provided an anticipated construction schedule. The equipment mix assumptions were also based on CalEEMod default assumptions based on the anticipated number of dwelling units per phase and is meant to represent a reasonably conservative estimate of construction activity. For the analysis, it is generally assumed that heavy construction equipment would be operating at the site for a maximum of 8 hours per day, 5 days per week. Default assumptions provided in CalEEMod were used to determine worker trips and vendor truck trips for each potential construction phase. The default CalEEMod trip distance for construction vehicles

5 CalEEMod is a statewide land use emissions computer model designed to provide a uniform platform to calculate construction and operational emissions from land use development projects. The model was developed for the California Air Pollution Control Officers Association in collaboration with multiple air districts across the state. Numerous lead agencies in the state, including SDAPCD, use CalEEMod to estimate GHG emissions in accordance with CEQA Guidelines Section 15064.4(a)(1).

was assumed, which was a one-way distance of 11.97 miles for worker trips, 7.63 miles for vendor truck trips, and 20 miles for haul truck trips.

It was assumed that construction of the Project would begin in August 2025. The Project would have four home building phases and single phases for demolition, site preparation, grading, and paving and would last approximately 41 months. The construction schedule used in the analysis represents a "worst-case" analysis scenario since emission factors for construction equipment decrease as the analysis year increases due to improvements in technology and more stringent regulatory requirements. The following represents the construction phasing assumed for the Project:

- Demolition: August 2025 (2 days)
- Site Preparation: August 2025 (4 days)
- Grading: August 2025 (45 days)
- Utilities: August 2025 (30 days)
- Paving: October 2025 (20 days)
- Building Construction Phase 1 – 6 homes: February 2026 (175 days)
- Building Construction Phase 2 – 7 homes: April 2026 (198 days)
- Building Construction Phase 3 – 7 homes: June 2026 (196 days)
- Architectural Coating – Phase 1 Homes: October 2026 (5 days)
- Building Construction Phase 4 – 7 homes: November 2026 (196 days)
- Architectural Coating – Phase 2 Homes: January 2027 (10 days)
- Architectural Coating – Phase 3 Homes: March 2027 (10 days)
- Architectural Coating – Phase 4 Homes: August 2027 (10 days)

Table 4 provides the construction equipment mix and vehicle trips assumed for estimating Project-generated construction emissions.

Table 4. Construction Scenario Assumptions

Construction Phase	Average Daily Vehicle Trips			Equipment			
	Worker Trips	Vendor Truck Trips	Truck Trips	Equipment Type	Quantity	HP	Usage Hours
Demolition	16	2	2	Concrete/Industrial Saws	1	33	8
				Excavators	3	36	8
				Rubber Tired Dozers	2	367	8
Site Preparation	18	2	2	Rubber Tired Dozers	3	367	8
				Tractors/Loaders/Backhoes	4	84	8
Grading	16	2	2	Excavators	1	36	8
				Graders	1	148	8
				Rubber Tired Dozers	1	367	8
				Tractors/Loaders/Backhoes	3		8
Utilities	8	2	0	Excavators	1	36	8

Table 4. Construction Scenario Assumptions

Construction Phase	Average Daily Vehicle Trips			Equipment			
	Worker Trips	Vendor Truck Trips	Truck Trips	Equipment Type	Quantity	HP	Usage Hours
				Plate Compactors	1	8	8
				Tractors/Loaders/Backhoes	1	8	84
Paving	20	6	0	Pavers	1	81	8
				Paving Equipment	2	89	6
				Rollers	2	36	6
				Cement and Mortar Mixers	2	10	6
				Tractors/Loaders/Backhoes	1	84	8
Building Construction – Phase 1 Homes	10	6	0	Cranes	1	367	7
				Forklifts	1	82	8
				Generator Sets	1	14	8
				Tractors/Loaders/Backhoes	1	84	7
				Welders	1	46	8
Building Construction – Phase 2 Homes	10	6	0	Cranes	1	367	7
				Forklifts	1	82	8
				Generator Sets	1	14	8
				Tractors/Loaders/Backhoes	1	84	7
				Welders	1	46	8
Building Construction – Phase 3 Homes	10	6	0	Cranes	1	367	7
				Forklifts	1	82	8
				Generator Sets	1	14	8
				Tractors/Loaders/Backhoes	1	84	7
				Welders	1	46	8
Architectural Coating – Phase 1 Homes	8	2	0	Air Compressors	1		6
Building Construction – Phase 4 Homes	10	6	0	Cranes	1	367	7
				Forklifts	1	82	8
				Generator Sets	1	14	8
				Tractors/Loaders/Backhoes	1	84	7
Architectural Coating – Phase 2 Homes	8	2	0	Air Compressors	1		6
Architectural Coating – Phase 3 Homes	8	2	0	Air Compressors	1		6

Table 4. Construction Scenario Assumptions

Construction Phase	Average Daily Vehicle Trips			Equipment			
	Worker Trips	Vendor Truck Trips	Truck Trips	Equipment Type	Quantity	HP	Usage Hours
Architectural Coating – Phase 4 Homes	8	2	0	Air Compressors	1		6

Note: See Appendix A for additional details.

Implementation of the Project would generate GHG emissions from off-road equipment and vehicle emissions,. Based on project specific information, approximately 200 cubic yards of fill will be imported.

Internal combustion engines used by construction equipment, vendor trucks (i.e., delivery trucks), haul trucks, and worker vehicles would result in emissions of CO_2, CH_4, N_2O, and Refrigerants (HFCs). For additional details see Appendix A, *Air Quality and Greenhouse Gas Emissions CalEEMod Output Files*.

2.3.2.2 Operation

Operation of the proposed Project would generate GHG emissions from mobile sources, area sources, energy sources, water, waste, and refrigeration which are discussed below. Emissions from these sources were estimated based on CalEEMod default assumptions for operations of the Project land uses. The Project would be fully operational in 2027 following the completion of construction.

Area

The area source category calculates direct sources of air pollutant emissions located at the Project site, including consumer product use, architectural coatings, and landscape maintenance equipment. CalEEMod defaults were used to estimate emissions from area sources during operation of the Project. Other area sources include fireplaces and wood stoves; however, PDF-AQ-4 requires the use of all-electric fireplaces.

Landscape maintenance includes fuel combustion emissions from equipment such as lawn mowers, rototillers, shredders/grinders, blowers, trimmers, chainsaws, and hedge trimmers, as well as air compressors, generators, and pumps. The emissions associated from landscape equipment use were estimated using CalEEMod. The emission factors are multiplied by the number of summer days that represent the number of operational days.

Energy

As represented in CalEEMod, energy sources include emissions associated with natural gas usage. CalEEMod default values for energy consumption for each land use were applied for the Project analysis. The energy use from residential land uses is calculated in CalEEMod based on the Residential Appliance Saturation Survey. The Project includes PDF-GHG-1 that requires an all-electric development, and the project would comply with the City's Climate Action Plan to install a minimum of 1.5 watts of solar per square feet of residential building or a solar system with a minimum of 2 kilowatt (kW) per dwelling unit.

Mobile Sources (Motor Vehicles)

Following the completion of construction activities, the Project would generate GHG emissions from mobile sources (vehicular traffic) as a result of the 27 additional residential units. The CalEEMod Version 2022.1.1.13 was used to estimate daily emissions from proposed vehicular sources in combination with project-specific trip rates provided in the Local Transportation Analysis prepared by LOS Engineering, Inc. CalEEMod default data, including trip characteristics, variable start information, emissions factors, and trip distances, were used for the model inputs. Emission factors representing the vehicle mix and emissions for 2027 were used to estimate emissions associated with vehicular sources.

Solid Waste

The Project would generate solid waste, and therefore, result in CO_2e emissions associated with landfill off-gassing. CalEEMod default values for solid waste generation were used to estimate GHG emissions associated with solid waste.

Water and Wastewater

Supply, conveyance, treatment, and distribution of water for the Project require the use of electricity, which would result in associated indirect GHG emissions. Similarly, wastewater generated by the project requires the use of electricity for conveyance and treatment, along with GHG emissions generated during wastewater treatment. The GHG emissions associated with Project water consumption were calculated using CalEEMod default values based on the land use type.

Refrigerants

Refrigerants are substances used in equipment for air conditioning (A/C) and refrigeration. Most of the refrigerants used today are HFCs or blends thereof, which can have high GWP values. All equipment that uses refrigerants has a charge size (i.e., quantity of refrigerant the equipment contains), and an operational refrigerant leak rate, and each refrigerant has a GWP that is specific to that refrigerant. CalEEMod quantifies refrigerant emissions from leaks during regular operation and routine servicing over the equipment lifetime, and then derives average annual emissions from the lifetime estimate.

For additional details see Appendix A, *Air Quality and Greenhouse Gas Emissions CalEEMod Output Files*.

2.4 Impact Analysis

2.4.1 Would the project generate greenhouse gas emissions, either directly or indirectly, that may have a significant impact on the environment?

2.4.2 Would the project conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing the emissions of greenhouse gases?

This section evaluates the GHG emissions impacts associated with the project regarding both significance criteria described in Section 2.3.1, Thresholds of Significance based on BAAQMD's thresholds of significance focused on project's achieving their "fair-share" of reductions. As discussed above in Section 3.2.3, the City of CAP was adopted in May 2019 to assist the City in reducing GHG emissions to 4 MT CO_2e per capita by 2030, and 2 MT CO_2e per capita by 2050 to align with the state's targets established by EOs B-30-15 and S-3-05, respectively. As discussed in Section 2.3.1, Thresholds of Significance, the City's CAP is a qualified GHG reduction plan. The CAP includes enumerated goals consistent with state targets set forth in AB 32 and SB 32; therefore, if a project is considered consistent with the CAP, it is also consistent with the applicable regulations.

Table 5 includes the applicable CAP Checklist items and the related Project consistency analysis.

Table 5. Climate Action Plan Consistency – Single Family Green Building Checklist

CAP Measure	Checklist Item	Project Consistency
CAP Measure BE-2: Require Decarbonization of New Residential Buildings. Complete 1,200 new low-rise residential electrification by 2030.	**All Electric Building Requirements (EMC 23.12.110 B).** All residential new construction shall be all-electric unless an exemption is applicable and approved by the City (see EMC 23.12.110 B). All-Electric buildings must include: ☒ No natural gas or propane plumbing in the building or on the property; ☒ No gas meter connection; ☒ Electricity as the source of energy for space heating, water heating, cooking appliances, and clothes drying appliances; and ☒ If a pool is associated, may use solar thermal pool heating, but no gas.	**Consistent.** The Project is a residential project that includes 27 dwelling units and includes PDF-GHG-1, which would require an all-electric development. Accordingly, the project would comply with the CAP measure and checklist item.
CAP Measure RE-2: Require New Homes to install Solar Photovoltaic Systems. Require: 1) New single-family homes to install at least 1.5 W solar per square feet or minimum 2 kW per home, and 2) New multi-family homes to install at least 1 W solar per square feet or minimum 1 kW per unit.	**Single Family Solar PV. (T24P6 150.10(a))** All newly constructed single-family buildings are required to install solar photovoltaic equipment sized according to CA Title 24, Part 6, Energy Code Section 150.10(a) which otherwise applies to newly constructed buildings.	**Consistent.** This measure requires information on the total conditioned floor area of the homes to determine the quantity and sizing of the solar photovoltaic system. Currently, the specifics on the conditioned floor area are not available. However, the Project would comply with this measure through the building permit process to ensure the appropriate amount of solar is installed.
CAP Measure CET-4: Require Residential Electric Vehicle Charging Stations (EVCS). Require new residential units to install EVCS equipment. Single family units are to install complete 40-Amp electrical circuit (EV Ready).	**EV Charging: New 1 and 2-family dwellings and townhouses with attached private garages (EMC 23.12.110 E).** For each family dwelling, a **dedicated 208/240-volt branch circuit** shall be installed in the **raceway** required by section 4.106.4.1 ("EV-Ready"). The branch circuit and overcurrent protective device shall be rated at 40 amperes minimum.	**Consistent.** The Project would comply with this measure through the building permit process. Based on the current 27 residential units the Project would install 9 dedicated 208/240 volt branch circuits in the raceway.

CAP Measure WE-1: Regularly Conduct Water Rate Studies and Implement Approved Water Rates. San Dieguito Water District (SDWD) and Olivenhain Municipal Water District (OMWD) complete regular water rate studies and adopt modified water rates as approved by Board of Directors. This measure is intended to reduce water use and GHG emissions associated with treatment and conveyance of water. This measure includes supportive measures such as converting all current municipal landscape adjacent to recycled water pipelines to recycled water and looking for opportunities to work with the San Elijo Joint Powers Authority to extend recycled water pipelines to additional municipal facilities, when economically viable.	**Graywater Systems (EMC 23.12.110 D).** Newly constructed single-family dwellings shall be pre-plumbed for a graywater system in accordance with Chapter 15 of the California Plumbing Code and including a connection to in a convenient location for integration of the graywater system with landscape irrigation systems and accepting graywater from all sources permissible in conformance with the definition of graywater as per Section 14876 of the California Water Code	**Consistent.** The Project would comply with this measure through the building permit process. At the time the building permits are sought, the plan sheets will show the homes pre-plumbed for a graywater system.

Source: City of Encinitas Climate Action Plan, updated 2020. City of Encinitas Single Family Green Building Checklist, 2022.

The City's CAP has accounted for growth in housing through the 2020 CAP update. The Proposed Project is consistent with the General Plan land use and zoning, as such the projected growth from development of the Project would be consistent with the CAP projections. As shown in Table 5, the Project would not conflict with the City's CAP implementation measures. Therefore, the Project is not expected to conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing the emissions of GHGs and the impact would be **less than significant**.

Consistency with CARB Scoping Plan, Senate Bill 32, Assembly Bill 1279, Executive Order S-3-05, and Assembly Bill 1279

EO S-3-05 identified the following goals: GHG emissions should be reduced to 2000 levels by 2010, to 1990 levels by 2020, and to 80% below 1990 levels by 2050. SB 32 establishes a statewide GHG emissions reduction target whereby CARB, in adopting rules and regulations to achieve the maximum technologically feasible and cost-effective GHG emissions reductions, shall ensure that statewide GHG emissions are reduced to at least 40% below 1990 levels by December 31, 2030. AB 1279 establishes a policy of the state to achieve net zero GHG emissions no later than 2045 and for statewide anthropogenic GHG emissions to be reduced to at least 85% below 1990 levels by 2045.

Each Scoping Plan builds upon the successful framework established by the initial Scoping Plan and subsequent updates, while also identifying new, technologically feasible, and cost-effective strategies to ensure that California meets increasingly stringent GHG reduction targets in a way that promotes and rewards innovation, continues to foster economic growth, and delivers improvements to the environment and public health, including in disadvantaged communities. The Scoping Plan updates have continued to express optimism in meeting future year targets of 2050 and 2030, as evaluated in the 2014 and 2017 Scoping Plans (respectively), and most recently, the 2045 goal addressed in the 2022 Scoping Plan under EO B-55-18, which AB 1279 codified and expanded on.

While there are no established protocols or thresholds of significance for that future year analysis, CARB forecasted in the 2014 Scoping Plan that compliance with the current Scoping Plan would put the state on a trajectory of meeting the long-term 2050 GHG goals, although the specific path to compliance was unknown at the time (CARB 2014). The 2017 Scoping Plan outlined a strategy to achieve the 2030 GHG reduction target. The proposed scenario in the 2022 Scoping Plan lays out a path not just to carbon neutrality by 2045, but also to the 2030 GHG emissions reduction target (CARB 2022b). The modeling indicates that, if the plan described in the proposed scenario is fully implemented, and done so on schedule, the state is on track to reduce its emissions to 260 MMT CO_2e by 2030 (CARB 2022b).

The City is on track to meet state-aligned emissions reduction targets for 2020 and 2030 (City of Encinitas 2020). The City has chosen to adopt a more stringent 2030 reduction of 44 percent below 2012 baseline levels compared to 40 percent. Regarding, AB 1279, it is important to note that the state's carbon neutrality goal does not preclude any individual project from emitting GHG emissions. AB 1279 codifies EO B-55-18, however, its enactment was linked to the concurrent enactment of SB 905, which requires CARB to create a Carbon Capture, Removal, Utilization, and Storage Program that, fundamentally, will sequester carbon emitted by other projects. Therefore, the state's carbon neutrality goal does not preclude all individual projects from emitting GHG emissions.

As discussed above, the Project would be consistent with the CAP; therefore, the Project would be consistent with state GHG reduction goals and progress towards achieving carbon neutrality.

Consistency with SANDAG RTP/SCS

At the regional level, the SANDAG's RTP/SCS has been adopted for the purpose of reducing GHG emissions attributable to passenger vehicles in the San Diego region. In October 2015, SANDAG adopted its Regional Plan, which was subsequently updated in 2021. The RTP/SCS is not directly applicable to the Project because the underlying purpose of the RTP/SCS is to provide direction and guidance on future regional growth (i.e., the location of new residential and nonresidential land uses) and transportation patterns throughout the City and greater San Diego County, as stipulated under Senate Bill 375. CARB has recognized that the approved RTP/SCS is consistent with Senate Bill 375. The SANDAG Regional Plan is generally consistent with the local government plans. Since the Project is within the scope of development that was anticipated in the General Plan, it would not result in growth that would conflict with the Regional Plan.

Quantification of Emissions

In accordance with CEQA Guidelines Section 15064.4(c), the Project's construction and operational GHG emissions have been quantified for disclosure purposes only. The Project's significance has been evaluated based on its potential to conflict with the City's CAP.

Construction

Table 6 shows the estimated annual GHG construction emissions associated with the Project. Additional information about methodology and approach are provided above in Section 2.3.2. Complete details of the construction emissions calculations are provided in Appendix A, *Air Quality and Greenhouse Gas Emissions CalEEMod Output Files*.

Table 6. Estimated Annual Construction GHG Emissions

Year	CO_2	CH_4	N_2O	R	CO_2e
	Metric Tons				
2025	110.60	<0.01	<0.01	0.02	111.33
2026	441.89	0.02	<0.01	0.08	445.24
2027	154.22	<0.01	<0.01	0.03	155.39
Total	***706.71***	***0.03***	***0.01***	***0.12***	***711.96***
				Amortized Emissions (30 years)	**23.73**

Source: CalEEMod Version 2022.1.1.5
Notes: GHG = greenhouse gas; CO_2 = carbon dioxide; CH_4 = methane; N_2O = nitrous oxide; R = refrigerant; CO_2e = carbon dioxide equivalent.
See Appendix A for complete results. <0.01 = reported value is less than 0.01.

As shown in Table 6, the estimated total GHG emissions from construction of the Project would be approximately 711.96 MT CO_2e. When amortized over 30 years, the estimated annual GHG emissions from construction of the Project would be approximately 23.73 MT CO_2e per year.

Operation

Table 7 shows the estimated annual GHG operational emissions associated with the Project. Complete details of the construction emissions calculations are provided in Appendix A, *Air Quality and Greenhouse Gas Emissions CalEEMod Output Files*.

Table 7. Summary of Estimated Annual GHG Emissions

Emissions Source	MT CO_2	MT CH_4	MT N_2O	R	MT CO_2e
Mobile	302.54	0.01	0.01	0.41	307.03
Area	0.15	0.00	0.00	-	0.16
Energy	1.87	<0.01	<0.01	-	2.02
Water	0.71	0.03	<0.01	-	1.72
Waste	1.59	0.13	0.00	-	5.55
Refrigerants	-	-	-	0.10	0.10
Total	306.86	0.21	0.01	0.51	316.57
Amortized Construction Emissions (30 years)					*23.73*
Project Operations + Amortized Construction Total					***340.30***

Source: See Appendix A for complete results.
Notes: GHG = greenhouse gas; MT = metric tons; CO_2 = carbon dioxide; CH_4 = methane; N_2O = nitrous oxide; R = refrigerants; CO_2e = carbon dioxide equivalent. <0.01 = reported value is less than 0.01.

As shown in Table 7, the total Project emissions during operation were estimated to be approximately 316.57 MT CO_2e per year. With the addition of the amortized construction emissions of approximately 23.73 MT CO2e per year, the total annual emissions would be 340.30 MT CO_2e per year.

Summary

Based on the preceding considerations, the Project would not conflict with an applicable plan adopted for the purpose of reducing GHG emissions or generate GHG emissions that would have a significant impact on the environment; therefore, the Project's impacts on GHG emissions would be **less than significant.**

3 References

CalRecycle. 2019. California's Short-Lived Climate Pollutant Reduction Strategy. Accessed November 2022. https://calrecycle.ca.gov/organics/slcp/

CalRecycle. 2015. *AB341 Report to the Legislature.* August 28. Available: https://www2.calrecycle.ca.gov/Publications/Details/1538. Accessed May 2022.

CAPCOA. 2022. *California Emissions Estimator Model (CalEEMod) User's Guide Version 2022.1.* May.

CARB. 2008. *Climate Change Scoping Plan.* December. Available: https://ww2.arb.ca.gov/sites/default/files/classic/cc/scopingplan/document/adopted_scoping_plan.pdf. Accessed May 2022.

CARB. 2014. *First Update to the Climate Change Scoping Plan Building on the Framework Pursuant to AB 32 – The California Global Warming Solutions Act of 2006*. May 2014. Available: https://ww2.arb.ca.gov/sites/default/files/classic/cc/scopingplan/2013_update/first_update_climate_change_scoping_plan.pdf Accessed May 2022.

CARB. 2017. *California's 2017 Climate Change Scoping Plan.* November. Available: https://ww2.arb.ca.gov/sites/default/files/classic/cc/scopingplan/scoping_plan_2017.pdf. Accessed May 2022.

CARB. 2021. *2000-2019 GHG Inventory (2021 Edition)*.

CARB. 2022a. *Current California GHG Emission Inventory Data 2000-2019 GHG Inventory (2022 Edition).* October 26, 2022. Accessed December 2022. https://ww2.arb.ca.gov/sites/default/files/classic/cc/inventory/2000-2020_ghg_inventory_trends.pdf .

CARB. 2022b. *2022 Scoping Plan Update.* November 16, 2022. Accessed December 2022. https://ww2.arb.ca.gov/our-work/programs/ab-32-climate-change-scoping-plan/2022-scoping-plan-documents

CEC. 2018. *2019 Building Energy Efficiency Standards.* Available: https://www.energy.ca.gov/programs-and-topics/programs/building-energy-efficiency-standards/2019-building-energy-efficiency. Accessed May 2022.

City of Encinitas 2011. *City of Encinitas General Plan.* March. Available: https://archive.encinitasca.gov/WebLink/browse.aspx?startid=665622&cr=1. Accessed. February 2023.

City of Encinitas. 2018. *Encinitas Climate Action Plan.*

City of Encinitas. 2020. *Encinitas Climate Action Plan.* November. Available: https://www.encinitasca.gov/home/showpublisheddocument/1698/637999947050530000. Accessed February 2023.

CNRA. 2009a. *Final Statement of Reasons for Regulatory Action.* December. Available: https://resources.ca.gov/CNRALegacyFiles/ceqa/docs/Final_Statement_of_Reasons.pdf. Accessed May 2022.

CNRA. 2009b. *2009 California Climate Adaptation Strategy.* Available: https://resources.ca.gov/CNRALegacyFiles/docs/climate/Statewide_Adaptation_Strategy.pdf. Accessed May 2022.

CNRA. 2014. *Safeguarding California: Reducing Climate Risk.* Available: https://cawaterlibrary.net/document/safeguarding-california-reducing-climate-risk-an-update-to-the-2009-california-climate-adaptation-strategy/. Accessed May 2022.

CNRA. 2019. *California's Fourth Climate Change Assessment: San Diego Region Report.* March 2019. Accessed April 2022 at https://www.energy.ca.gov/sites/default/files/2019-11/Reg_Report-SUM-CCCA4-2018-009_SanDiego_ADA.pdf.

Energy Information Administration (EIA). 2012. Table PBA2. Summary table: total and medians of floorspace, number of workers, hours of operation, and age of building by building activity subcategories, 2012. Accessed December 2022. https://www.eia.gov/consumption/commercial/data/2012/bc/cfm/pba2.php

EPA (U.S. Environmental Protection Agency). 2022a. *Inventory of U.S. Greenhouse Gas Emissions and Sinks 1990–2020*. EPA 430-R-22-003. Accessed December 2022. https://www.epa.gov/ghgemissions/draft-inventory-us-greenhouse-gas-emissionsand-sinks-1990-2020.

EPA. 2022b. *Basics of Climate Change.* February 23. Available: https://www.epa.gov/climatechange-science/basics-climate-change. Accessed May 2022.

EPA. 2022c. *Midterm Evaluation of Light-Duty Vehicle Greenhouse Gas Emissions Standards for Model Years 2022-2025.* Available: https://www.epa.gov/regulations-emissions-vehicles-and-engines/midterm-evaluation-light-duty-vehicle-greenhouse-gas. Accessed May 2022.

EPA and NHTSA (Department of Transportation's National Highway Traffic Safety Administration). 2016. *EPA and NHTSA Adopt Standards to Reduce Greenhouse Gas Emissions and Improve Fuel Efficiency of Medium- and Heavy-Duty Vehicles for Model Year 2018 and Beyond*. August 2016. Available: https://nepis.epa.gov/Exe/ZyPDF.cgi/P100P7NL.PDF?Dockey=P100P7NL.PDF. Accessed May 2022.

EPA and NHTSA. 2018. *The Safer Affordable Fuel-Efficient 'SAFE' Vehicles Rule for Model Years 2021-2026 Passenger Vehicles and Light Trucks*. Proposed Rule August 2018. Available: https://www.govinfo.gov/content/pkg/FR-2018-08-24/pdf/2018-16820.pdf. Accessed May 2022.

IPCC (Intergovernmental Panel on Climate Change). 2007. *Climate Change 2007: The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change* [Solomon, S., D. Qin, M. Manning, Z. Chen, M. Marquis, K.B. Averyt, M. Tignor and H.L. Miller (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 996 pp. Accessed May 2019. http://www.ipcc.ch/pdf/assessment-report/ar4/wg1/ar4_wg1_full_report.pdf.

IPCC. 2014. *Climate Change 2014 Synthesis Report: A Report of the Intergovernmental Panel on Climate Change.* Contribution of Working Groups I, II and III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change. Accessed May 2019. http://www.ipcc.ch/report/ar5/syr/.

IPCC, 2018: *Summary for Policymakers. In: Global Warming of 1.5°C. An IPCC Special Report on the impacts of global warming of 1.5°C above pre-industrial levels and related global greenhouse gas emission pathways, in the context of strengthening the global response to the threat of climate change, sustainable development, and efforts to eradicate poverty* [Masson-Delmotte, V., P. Zhai, H.-O. Pörtner, D. Roberts, J. Skea, P.R. Shukla, A. Pirani, W. Moufouma-Okia, C. Péan, R. Pidcock, S. Connors, J.B.R. Matthews, Y. Chen, X. Zhou, M.I. Gomis, E. Lonnoy, T. Maycock, M. Tignor, and T. Waterfield (eds.)]. In Press. Available: https://www.ipcc.ch/site/assets/uploads/sites/2/2019/05/SR15_SPM_version_report_LR.pdf. Accessed May 2022.

OEHHA (Office of Environmental Health Hazard Assessment). 2018. *Indicators of Climate Change.* August 30. Available: https://oehha.ca.gov/climate-change/document/indicators-climate-change-california. Accessed May 2022.

OPR. 2007. *Senate Bill No. 97 Chapter 185.* Available: https://opr.ca.gov/docs/SB_97_bill_20070824_chaptered.pdf. Accessed May 2022.

PBL (PBL Netherlands Environmental Assessment Agency). 2022. *Trends in Global CO_2 and Total Greenhouse Gas Emissions, 2021 Summary Report*. Accessed November 2022. https://www.pbl.nl/sites/default/files/downloads/pbl-2022-trends-in-global-co2-and_total-greenhouse-gas-emissions-2021-summary-report_4758.pdf

SANDAG. 2015. *2015 Regional Plan.* Available: https://www.sdforward.com/2019-federal-rtp/2015-regional-plan. Accessed May 2022.

SANDAG. 2017a. "Series 13: 2050 Regional Growth Forecast." Available: http://www.sandag.org/index.asp?classid=12&subclassid=84&projectid=503&fuseaction=projects.detail. Accessed May 2022.

SANDAG. 2017b. "Comprehensive Transportation Projects: 2050 Regional Transportation Plan." Available: http://www.sandag.org/index.asp?projectid=349&fuseaction=projects.detail. Accessed May 2022.

SANDAG. 2020. *6th Cycle Regional Housing Needs Assessment Plan.* July 10. Available: https://www.sandag.org/uploads/projectid/projectid_189_27782.pdf. Accessed April 2022.

SANDAG. 2021. *SANDAG 2021 Regional Plan*. Adopted December 10, 2021. Accessed April 2022. https://sdforward.com/mobility-planning/2021-regional-plan

SCAQMD. 2008. *Final Localized Significance Threshold Methodology*. July. Available: http://www.aqmd.gov/docs/default-source/ceqa/handbook/localized-significance-thresholds/final-lst-methodology-document.pdf?sfvrsn=2. Accessed May 2022.

INTENTIONALLY LEFT BLANK

4 Preparers

Elena Nuño, Senior Air Quality Specialist

INTENTIONALLY LEFT BLANK

Appendix A

CalEEMod Outputs and Estimated Emissions

Encinitas Ocean Bluffs Residential Project Detailed Report

Table of Contents

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	Encinitas Ocean Bluffs Residential Project
Construction Start Date	8/1/2025
Operational Year	2027
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	2.20
Precipitation (days)	22.4
Location	501 Ocean Bluff Way, Encinitas, CA 92024, USA
County	San Diego
City	Encinitas
Air District	San Diego County APCD
Air Basin	San Diego
TAZ	6218
EDFZ	12
Electric Utility	San Diego Gas & Electric
Gas Utility	San Diego Gas & Electric
App Version	2022.1.1.12

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description

Single Family Housing	27.0	Dwelling Unit	4.30	85,200	138,900	0.00	75.0	—
Other Asphalt Surfaces	0.60	Acre	0.60	0.00	0.00	0.00	—	—

1.3. User-Selected Emission Reduction Measures by Emissions Sector

Sector	#	Measure Title
Construction	C-10-A	Water Exposed Surfaces
Construction	C-10-B	Water Active Demolition Sites
Construction	C-10-C	Water Unpaved Construction Roads
Construction	C-11	Limit Vehicle Speeds on Unpaved Roads
Construction	C-12	Sweep Paved Roads
Energy	E-10-B	Establish Onsite Renewable Energy Systems: Solar Power
Energy	E-12-A	Install Alternative Type of Water Heater in Place of Gas Storage Tank Heater in Residences
Energy	E-12-B	Install Electric Space Heater in Place of Natural Gas Heaters in Residences
Energy	E-13	Install Electric Ranges in Place of Gas Ranges

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.03	6.10	32.0	31.1	0.05	1.37	19.9	21.2	1.26	10.2	11.4	—	5,660	5,660	0.23	0.11	2.05	5,690
Mit.	4.03	6.10	32.0	31.1	0.05	1.37	7.87	9.24	1.26	3.99	5.25	—	5,660	5,660	0.23	0.11	2.05	5,690

% Reduced	—	—	—	—	—	—	60%	56%	—	61%	54%	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	2.76	7.41	21.1	25.3	0.05	0.88	7.42	8.30	0.81	3.51	4.32	—	5,147	5,147	0.21	0.11	0.05	5,185
Mit.	2.76	7.41	21.1	25.3	0.05	0.88	3.10	3.98	0.81	1.42	2.23	—	5,147	5,147	0.21	0.11	0.05	5,185
% Reduced	—	—	—	—	—	—	58%	52%	—	60%	48%	—	—	—	—	—	—	—
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.29	1.14	9.52	11.7	0.02	0.35	1.14	1.28	0.32	0.55	0.67	—	2,669	2,669	0.11	0.06	0.46	2,689
Mit.	1.29	1.14	9.52	11.7	0.02	0.35	0.47	0.65	0.32	0.22	0.40	—	2,669	2,669	0.11	0.06	0.46	2,689
% Reduced	—	—	—	—	—	—	58%	49%	—	60%	41%	—	—	—	—	—	—	—
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.24	0.21	1.74	2.13	< 0.005	0.06	0.21	0.23	0.06	0.10	0.12	—	442	442	0.02	0.01	0.08	445
Mit.	0.24	0.21	1.74	2.13	< 0.005	0.06	0.09	0.12	0.06	0.04	0.07	—	442	442	0.02	0.01	0.08	445
% Reduced	—	—	—	—	—	—	58%	49%	—	60%	41%	—	—	—	—	—	—	—
Exceeds (Daily Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Threshold	—	75.0	250	550	250	—	—	100	—	—	55.0	—	—	—	—	—	—	—
Unmit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Mit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Exceeds (Average Daily)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Threshold	—	75.0	250	550	250	—	—	100	—	—	55.0	—	—	—	—	—	—	—
Unmit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Mit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	4.03	3.39	32.0	31.1	0.05	1.37	19.9	21.2	1.26	10.2	11.4	—	5,660	5,660	0.23	0.08	1.43	5,690
2026	2.50	2.08	18.4	22.7	0.05	0.67	0.59	1.26	0.62	0.15	0.76	—	5,162	5,162	0.21	0.11	2.05	5,202
2027	0.80	6.10	5.83	7.50	0.02	0.20	0.23	0.43	0.19	0.06	0.24	—	1,717	1,717	0.07	0.04	0.62	1,730
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	2.76	2.32	21.1	25.3	0.04	0.88	7.42	8.30	0.81	3.51	4.32	—	4,351	4,351	0.18	0.08	0.04	4,379
2026	2.50	6.01	18.4	22.5	0.05	0.67	0.70	1.37	0.62	0.17	0.79	—	5,147	5,147	0.21	0.11	0.05	5,185
2027	2.40	7.41	17.5	22.4	0.05	0.60	0.70	1.30	0.56	0.17	0.73	—	5,134	5,134	0.21	0.11	0.05	5,171
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.43	0.36	3.26	3.84	0.01	0.14	1.14	1.28	0.13	0.55	0.67	—	668	668	0.03	0.01	0.10	672
2026	1.29	1.14	9.52	11.7	0.02	0.35	0.31	0.65	0.32	0.08	0.40	—	2,669	2,669	0.11	0.06	0.46	2,689
2027	0.43	0.86	3.15	4.04	0.01	0.11	0.14	0.24	0.10	0.03	0.13	—	932	932	0.04	0.02	0.16	939
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.08	0.07	0.59	0.70	< 0.005	0.03	0.21	0.23	0.02	0.10	0.12	—	111	111	< 0.005	< 0.005	0.02	111
2026	0.24	0.21	1.74	2.13	< 0.005	0.06	0.06	0.12	0.06	0.01	0.07	—	442	442	0.02	0.01	0.08	445
2027	0.08	0.16	0.58	0.74	< 0.005	0.02	0.02	0.04	0.02	0.01	0.02	—	154	154	0.01	< 0.005	0.03	155

2.3. Construction Emissions by Year, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	4.03	3.39	32.0	31.1	0.05	1.37	7.87	9.24	1.26	3.99	5.25	—	5,660	5,660	0.23	0.08	1.43	5,690
2026	2.50	2.08	18.4	22.7	0.05	0.67	0.59	1.26	0.62	0.15	0.76	—	5,162	5,162	0.21	0.11	2.05	5,202
2027	0.80	6.10	5.83	7.50	0.02	0.20	0.23	0.43	0.19	0.06	0.24	—	1,717	1,717	0.07	0.04	0.62	1,730
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	2.76	2.32	21.1	25.3	0.04	0.88	3.10	3.98	0.81	1.42	2.23	—	4,351	4,351	0.18	0.08	0.04	4,379
2026	2.50	6.01	18.4	22.5	0.05	0.67	0.70	1.37	0.62	0.17	0.79	—	5,147	5,147	0.21	0.11	0.05	5,185
2027	2.40	7.41	17.5	22.4	0.05	0.60	0.70	1.30	0.56	0.17	0.73	—	5,134	5,134	0.21	0.11	0.05	5,171
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.43	0.36	3.26	3.84	0.01	0.14	0.47	0.61	0.13	0.22	0.35	—	668	668	0.03	0.01	0.10	672
2026	1.29	1.14	9.52	11.7	0.02	0.35	0.31	0.65	0.32	0.08	0.40	—	2,669	2,669	0.11	0.06	0.46	2,689
2027	0.43	0.86	3.15	4.04	0.01	0.11	0.14	0.24	0.10	0.03	0.13	—	932	932	0.04	0.02	0.16	939
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.08	0.07	0.59	0.70	< 0.005	0.03	0.09	0.11	0.02	0.04	0.06	—	111	111	< 0.005	< 0.005	0.02	111
2026	0.24	0.21	1.74	2.13	< 0.005	0.06	0.06	0.12	0.06	0.01	0.07	—	442	442	0.02	0.01	0.08	445
2027	0.08	0.16	0.58	0.74	< 0.005	0.02	0.02	0.04	0.02	0.01	0.02	—	154	154	0.01	< 0.005	0.03	155

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.14	3.02	0.71	7.59	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,949	1,960	1.27	0.08	6.38	2,022
Mit.	1.14	3.02	0.71	7.59	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,917	1,928	1.25	0.08	6.38	1,989
% Reduced	—	—	1%	< 0.5%	—	—	—	—	—	—	—	—	2%	2%	1%	3%	—	2%
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.12	3.00	0.78	7.15	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,865	1,876	1.27	0.08	0.76	1,934
Mit.	1.12	3.00	0.78	7.15	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,832	1,844	1.25	0.08	0.76	1,901
% Reduced	—	—	1%	< 0.5%	—	—	—	—	—	—	—	—	2%	2%	1%	2%	—	2%
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.10	2.98	0.77	7.14	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,874	1,886	1.27	0.08	3.10	1,946
Mit.	1.10	2.98	0.77	7.14	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,842	1,853	1.25	0.08	3.10	1,912
% Reduced	—	—	1%	< 0.5%	—	—	—	—	—	—	—	—	2%	2%	1%	3%	—	2%
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.20	0.54	0.14	1.30	< 0.005	< 0.005	0.12	0.12	< 0.005	0.02	0.02	1.89	310	312	0.21	0.01	0.51	322
Mit.	0.20	0.54	0.14	1.30	< 0.005	< 0.005	0.12	0.12	< 0.005	0.02	0.02	1.89	305	307	0.21	0.01	0.51	317
% Reduced	< 0.5%	< 0.5%	1%	< 0.5%	< 0.5%	4%	—	< 0.5%	4%	—	< 0.5%	—	2%	2%	1%	3%	—	2%
Exceeds (Daily Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Threshold	—	75.0	250	550	250	—	—	100	—	—	55.0	—	—	—	—	—	—	—
Unmit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—

Mit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Exceeds (Average Daily)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Threshold	—	75.0	250	550	250	—	—	100	—	—	55.0	—	—	—	—	—	—	—
Unmit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Mit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Exceeds (Annual)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Threshold	—	13.7	40.0	100	40.0	—	—	15.0	—	—	10.0	—	—	—	—	—	—	—
Unmit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Mit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—

2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	1.14	1.04	0.71	7.59	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,899	1,899	0.09	0.07	5.77	1,928
Area	0.00	1.97	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	43.6	43.6	0.03	< 0.005	—	45.6
Water	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Waste	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Total	1.14	3.02	0.71	7.59	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,949	1,960	1.27	0.08	6.38	2,022

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	1.12	1.02	0.78	7.15	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,815	1,815	0.09	0.08	0.15	1,840
Area	0.00	1.97	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	43.6	43.6	0.03	< 0.005	—	45.6
Water	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Waste	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Total	1.12	3.00	0.78	7.15	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,865	1,876	1.27	0.08	0.76	1,934
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	1.10	1.01	0.77	7.14	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,827	1,827	0.09	0.08	2.49	1,854
Area	0.00	1.97	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.90	0.90	< 0.005	< 0.005	—	0.94
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	43.6	43.6	0.03	< 0.005	—	45.6
Water	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Waste	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Total	1.10	2.98	0.77	7.14	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,874	1,886	1.27	0.08	3.10	1,946
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.20	0.18	0.14	1.30	< 0.005	< 0.005	0.12	0.12	< 0.005	0.02	0.02	—	303	303	0.01	0.01	0.41	307
Area	0.00	0.36	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.15	0.15	< 0.005	< 0.005	—	0.16
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	7.22	7.22	0.01	< 0.005	—	7.55
Water	—	—	—	—	—	—	—	—	—	—	—	0.30	0.41	0.71	0.03	< 0.005	—	1.72
Waste	—	—	—	—	—	—	—	—	—	—	—	1.59	0.00	1.59	0.16	0.00	—	5.55
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.10	0.10
Total	0.20	0.54	0.14	1.30	< 0.005	< 0.005	0.12	0.12	< 0.005	0.02	0.02	1.89	310	312	0.21	0.01	0.51	322

2.6. Operations Emissions by Sector, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	1.14	1.04	0.71	7.59	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,899	1,899	0.09	0.07	5.77	1,928
Area	0.00	1.97	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Energy	> -0.005	> -0.005	-0.01	> -0.005	> -0.005	> -0.005	—	> -0.005	> -0.005	—	> -0.005	—	11.3	11.3	0.01	< 0.005	—	12.2
Water	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Waste	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Total	1.14	3.02	0.71	7.59	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,917	1,928	1.25	0.08	6.38	1,989
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	1.12	1.02	0.78	7.15	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,815	1,815	0.09	0.08	0.15	1,840
Area	0.00	1.97	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Energy	> -0.005	> -0.005	-0.01	> -0.005	> -0.005	> -0.005	—	> -0.005	> -0.005	—	> -0.005	—	11.3	11.3	0.01	< 0.005	—	12.2
Water	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Waste	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Total	1.12	3.00	0.78	7.15	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,832	1,844	1.25	0.08	0.76	1,901
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	1.10	1.01	0.77	7.14	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,827	1,827	0.09	0.08	2.49	1,854
Area	0.00	1.97	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.90	0.90	< 0.005	< 0.005	—	0.94
Energy	> -0.005	> -0.005	-0.01	> -0.005	> -0.005	> -0.005	—	> -0.005	> -0.005	—	> -0.005	—	11.3	11.3	0.01	< 0.005	—	12.2
Water	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4

Waste	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Total	1.10	2.98	0.77	7.14	0.02	0.01	0.65	0.66	0.01	0.11	0.13	11.4	1,842	1,853	1.25	0.08	3.10	1,912
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.20	0.18	0.14	1.30	< 0.005	< 0.005	0.12	0.12	< 0.005	0.02	0.02	—	303	303	0.01	0.01	0.41	307
Area	0.00	0.36	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.15	0.15	< 0.005	< 0.005	—	0.16
Energy	> -0.005	> -0.005	> -0.005	> -0.005	> -0.005	> -0.005	—	> -0.005	> -0.005	—	> -0.005	—	1.87	1.87	< 0.005	< 0.005	—	2.02
Water	—	—	—	—	—	—	—	—	—	—	—	0.30	0.41	0.71	0.03	< 0.005	—	1.72
Waste	—	—	—	—	—	—	—	—	—	—	—	1.59	0.00	1.59	0.16	0.00	—	5.55
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.10	0.10
Total	0.20	0.54	0.14	1.30	< 0.005	< 0.005	0.12	0.12	< 0.005	0.02	0.02	1.89	305	307	0.21	0.01	0.51	317

3. Construction Emissions Details

3.1. Demolition (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.86	2.40	22.2	19.9	0.03	0.92	—	0.92	0.84	—	0.84	—	3,425	3,425	0.14	0.03	—	3,437
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.01	0.12	0.11	< 0.005	0.01	—	0.01	< 0.005	—	< 0.005	—	18.8	18.8	< 0.005	< 0.005	—	18.8
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	3.11	3.11	< 0.005	< 0.005	—	3.12
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.06	0.05	0.74	0.00	0.00	0.14	0.14	0.00	0.03	0.03	—	152	152	0.01	0.01	0.57	154
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	50.1	50.1	< 0.005	0.01	0.13	52.3
Hauling	0.01	< 0.005	0.19	0.07	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	144	144	0.01	0.02	0.31	151
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.79	0.79	< 0.005	< 0.005	< 0.005	0.80
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.27	0.27	< 0.005	< 0.005	< 0.005	0.29
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.79	0.79	< 0.005	< 0.005	< 0.005	0.83
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.13	0.13	< 0.005	< 0.005	< 0.005	0.13

Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.05	0.05	< 0.005	< 0.005	< 0.005	0.05
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.13	0.13	< 0.005	< 0.005	< 0.005	0.14

3.2. Demolition (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.86	2.40	22.2	19.9	0.03	0.92	—	0.92	0.84	—	0.84	—	3,425	3,425	0.14	0.03	—	3,437
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.01	0.12	0.11	< 0.005	0.01	—	0.01	< 0.005	—	< 0.005	—	18.8	18.8	< 0.005	< 0.005	—	18.8
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	3.11	3.11	< 0.005	< 0.005	—	3.12
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.06	0.05	0.74	0.00	0.00	0.14	0.14	0.00	0.03	0.03	—	152	152	0.01	0.01	0.57	154
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	50.1	50.1	< 0.005	0.01	0.13	52.3
Hauling	0.01	< 0.005	0.19	0.07	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	144	144	0.01	0.02	0.31	151
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.79	0.79	< 0.005	< 0.005	< 0.005	0.80
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.27	0.27	< 0.005	< 0.005	< 0.005	0.29
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.79	0.79	< 0.005	< 0.005	< 0.005	0.83
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.13	0.13	< 0.005	< 0.005	< 0.005	0.13
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.05	0.05	< 0.005	< 0.005	< 0.005	0.05
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.13	0.13	< 0.005	< 0.005	< 0.005	0.14

3.3. Site Preparation (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	3.94	3.31	31.6	30.2	0.05	1.37	—	1.37	1.26	—	1.26	—	5,295	5,295	0.21	0.04	—	5,314
Dust From Material Movement	—	—	—	—	—	—	19.7	19.7	—	10.1	10.1	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.04	0.35	0.33	< 0.005	0.01	—	0.01	0.01	—	0.01	—	58.0	58.0	< 0.005	< 0.005	—	58.2
Dust From Material Movement	—	—	—	—	—	—	0.22	0.22	—	0.11	0.11	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.06	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	9.61	9.61	< 0.005	< 0.005	—	9.64
Dust From Material Movement	—	—	—	—	—	—	0.04	0.04	—	0.02	0.02	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.08	0.07	0.06	0.83	0.00	0.00	0.15	0.15	0.00	0.04	0.04	—	171	171	0.01	0.01	0.64	173

Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	50.1	50.1	< 0.005	0.01	0.13	52.3
Hauling	0.01	< 0.005	0.19	0.07	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	144	144	0.01	0.02	0.31	151
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.78	1.78	< 0.005	< 0.005	< 0.005	1.81
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.55	0.55	< 0.005	< 0.005	< 0.005	0.57
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.58	1.58	< 0.005	< 0.005	< 0.005	1.65
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.30	0.30	< 0.005	< 0.005	< 0.005	0.30
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.09	0.09	< 0.005	< 0.005	< 0.005	0.09
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.26	0.26	< 0.005	< 0.005	< 0.005	0.27

3.4. Site Preparation (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	3.94	3.31	31.6	30.2	0.05	1.37	—	1.37	1.26	—	1.26	—	5,295	5,295	0.21	0.04	—	5,314
Dust From Material Movement	—	—	—	—	—	—	7.67	7.67	—	3.94	3.94	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.04	0.35	0.33	< 0.005	0.01	—	0.01	0.01	—	0.01	—	58.0	58.0	< 0.005	< 0.005	—	58.2
Dust From Material Movement	—	—	—	—	—	—	0.08	0.08	—	0.04	0.04	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.06	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	9.61	9.61	< 0.005	< 0.005	—	9.64
Dust From Material Movement	—	—	—	—	—	—	0.02	0.02	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.08	0.07	0.06	0.83	0.00	0.00	0.15	0.15	0.00	0.04	0.04	—	171	171	0.01	0.01	0.64	173
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	50.1	50.1	< 0.005	0.01	0.13	52.3
Hauling	0.01	< 0.005	0.19	0.07	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	144	144	0.01	0.02	0.31	151
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.78	1.78	< 0.005	< 0.005	< 0.005	1.81
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.55	0.55	< 0.005	< 0.005	< 0.005	0.57
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.58	1.58	< 0.005	< 0.005	< 0.005	1.65
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.30	0.30	< 0.005	< 0.005	< 0.005	0.30
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.09	0.09	< 0.005	< 0.005	< 0.005	0.09
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.26	0.26	< 0.005	< 0.005	< 0.005	0.27

3.5. Grading (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.07	1.74	16.3	17.9	0.03	0.72	—	0.72	0.66	—	0.66	—	2,959	2,959	0.12	0.02	—	2,970
Dust From Material Movement	—	—	—	—	—	—	7.08	7.08	—	3.42	3.42	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.07	1.74	16.3	17.9	0.03	0.72	—	0.72	0.66	—	0.66	—	2,959	2,959	0.12	0.02	—	2,970
Dust From Material Movement	—	—	—	—	—	—	7.08	7.08	—	3.42	3.42	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.26	0.21	2.01	2.21	< 0.005	0.09	—	0.09	0.08	—	0.08	—	365	365	0.01	< 0.005	—	366
Dust From Material Movement	—	—	—	—	—	—	0.87	0.87	—	0.42	0.42	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.37	0.40	< 0.005	0.02	—	0.02	0.01	—	0.01	—	60.4	60.4	< 0.005	< 0.005	—	60.6
Dust From Material Movement	—	—	—	—	—	—	0.16	0.16	—	0.08	0.08	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.06	0.05	0.74	0.00	0.00	0.14	0.14	0.00	0.03	0.03	—	152	152	0.01	0.01	0.57	154
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	50.1	50.1	< 0.005	0.01	0.13	52.3
Hauling	0.01	< 0.005	0.19	0.07	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	144	144	0.01	0.02	0.31	151
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.06	0.05	0.65	0.00	0.00	0.14	0.14	0.00	0.03	0.03	—	143	143	0.01	0.01	0.01	145
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	50.1	50.1	< 0.005	0.01	< 0.005	52.2

Hauling	0.01	< 0.005	0.20	0.07	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	144	144	0.01	0.02	0.01	151
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.08	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	17.8	17.8	< 0.005	< 0.005	0.03	18.1
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	6.17	6.17	< 0.005	< 0.005	0.01	6.45
Hauling	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	17.7	17.7	< 0.005	< 0.005	0.02	18.6
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	2.95	2.95	< 0.005	< 0.005	0.01	3.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.02	1.02	< 0.005	< 0.005	< 0.005	1.07
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	2.93	2.93	< 0.005	< 0.005	< 0.005	3.08

3.6. Grading (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.07	1.74	16.3	17.9	0.03	0.72	—	0.72	0.66	—	0.66	—	2,959	2,959	0.12	0.02	—	2,970
Dust From Material Movement	—	—	—	—	—	—	2.76	2.76	—	1.34	1.34	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.07	1.74	16.3	17.9	0.03	0.72	—	0.72	0.66	—	0.66	—	2,959	2,959	0.12	0.02	—	2,970

Dust From Material Movement	—	—	—	—	—	—	2.76	2.76	—	1.34	1.34	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.26	0.21	2.01	2.21	< 0.005	0.09	—	0.09	0.08	—	0.08	—	365	365	0.01	< 0.005	—	366
Dust From Material Movement	—	—	—	—	—	—	0.34	0.34	—	0.16	0.16	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.37	0.40	< 0.005	0.02	—	0.02	0.01	—	0.01	—	60.4	60.4	< 0.005	< 0.005	—	60.6
Dust From Material Movement	—	—	—	—	—	—	0.06	0.06	—	0.03	0.03	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.06	0.05	0.74	0.00	0.00	0.14	0.14	0.00	0.03	0.03	—	152	152	0.01	0.01	0.57	154
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	50.1	50.1	< 0.005	0.01	0.13	52.3
Hauling	0.01	< 0.005	0.19	0.07	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	144	144	0.01	0.02	0.31	151
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.07	0.06	0.05	0.65	0.00	0.00	0.14	0.14	0.00	0.03	0.03	—	143	143	0.01	0.01	0.01	145
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	50.1	50.1	< 0.005	0.01	< 0.005	52.2
Hauling	0.01	< 0.005	0.20	0.07	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	144	144	0.01	0.02	0.01	151
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.08	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	17.8	17.8	< 0.005	< 0.005	0.03	18.1
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	6.17	6.17	< 0.005	< 0.005	0.01	6.45
Hauling	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	17.7	17.7	< 0.005	< 0.005	0.02	18.6
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	2.95	2.95	< 0.005	< 0.005	0.01	3.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.02	1.02	< 0.005	< 0.005	< 0.005	1.07
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	2.93	2.93	< 0.005	< 0.005	< 0.005	3.08

3.7. Building Construction (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.37	0.31	2.83	3.37	0.01	0.11	—	0.11	0.10	—	0.10	—	710	710	0.03	0.01	—	712
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.07	0.06	0.52	0.62	< 0.005	0.02	—	0.02	0.02	—	0.02	—	118	118	< 0.005	< 0.005	—	118
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.43	0.00	0.00	0.08	0.08	0.00	0.02	0.02	—	93.0	93.0	< 0.005	< 0.005	0.33	94.4
Vendor	0.01	0.01	0.19	0.09	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	147	147	0.01	0.02	0.36	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.38	0.00	0.00	0.08	0.08	0.00	0.02	0.02	—	87.8	87.8	< 0.005	< 0.005	0.01	89.0
Vendor	0.01	< 0.005	0.20	0.09	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	147	147	0.01	0.02	0.01	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.01	0.18	0.00	0.00	0.04	0.04	0.00	0.01	0.01	—	42.5	42.5	< 0.005	< 0.005	0.07	43.1
Vendor	0.01	< 0.005	0.09	0.04	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	70.7	70.7	< 0.005	0.01	0.07	73.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	7.03	7.03	< 0.005	< 0.005	0.01	7.13
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.7	11.7	< 0.005	< 0.005	0.01	12.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.8. Building Construction (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.37	0.31	2.83	3.37	0.01	0.11	—	0.11	0.10	—	0.10	—	710	710	0.03	0.01	—	712
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.07	0.06	0.52	0.62	< 0.005	0.02	—	0.02	0.02	—	0.02	—	118	118	< 0.005	< 0.005	—	118

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.43	0.00	0.00	0.08	0.08	0.00	0.02	0.02	—	93.0	93.0	< 0.005	< 0.005	0.33	94.4
Vendor	0.01	0.01	0.19	0.09	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	147	147	0.01	0.02	0.36	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.38	0.00	0.00	0.08	0.08	0.00	0.02	0.02	—	87.8	87.8	< 0.005	< 0.005	0.01	89.0
Vendor	0.01	< 0.005	0.20	0.09	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	147	147	0.01	0.02	0.01	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.01	0.18	0.00	0.00	0.04	0.04	0.00	0.01	0.01	—	42.5	42.5	< 0.005	< 0.005	0.07	43.1
Vendor	0.01	< 0.005	0.09	0.04	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	70.7	70.7	< 0.005	0.01	0.07	73.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	7.03	7.03	< 0.005	< 0.005	0.01	7.13
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.7	11.7	< 0.005	< 0.005	0.01	12.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Building Construction (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.42	0.35	3.18	3.79	0.01	0.12	—	0.12	0.11	—	0.11	—	797	797	0.03	0.01	—	799
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.06	0.58	0.69	< 0.005	0.02	—	0.02	0.02	—	0.02	—	132	132	0.01	< 0.005	—	132
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.43	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	93.0	93.0	< 0.005	< 0.005	0.33	94.4
Vendor	0.01	0.01	0.19	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	147	147	0.01	0.02	0.36	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.38	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	87.8	87.8	< 0.005	< 0.005	0.01	89.0
Vendor	0.01	< 0.005	0.20	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	147	147	0.01	0.02	0.01	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.21	0.00	0.00	0.09	0.09	0.00	0.02	0.02	—	47.7	47.7	< 0.005	< 0.005	0.08	48.4
Vendor	0.01	< 0.005	0.11	0.05	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	79.3	79.3	< 0.005	0.01	0.08	82.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	7.89	7.89	< 0.005	< 0.005	0.01	8.01
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	13.1	13.1	< 0.005	< 0.005	0.01	13.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.10. Building Construction (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.42	0.35	3.18	3.79	0.01	0.12	—	0.12	0.11	—	0.11	—	797	797	0.03	0.01	—	799
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.06	0.58	0.69	< 0.005	0.02	—	0.02	0.02	—	0.02	—	132	132	0.01	< 0.005	—	132
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.43	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	93.0	93.0	< 0.005	< 0.005	0.33	94.4
Vendor	0.01	0.01	0.19	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	147	147	0.01	0.02	0.36	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.38	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	87.8	87.8	< 0.005	< 0.005	0.01	89.0
Vendor	0.01	< 0.005	0.20	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	147	147	0.01	0.02	0.01	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.21	0.00	0.00	0.09	0.09	0.00	0.02	0.02	—	47.7	47.7	< 0.005	< 0.005	0.08	48.4
Vendor	0.01	< 0.005	0.11	0.05	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	79.3	79.3	< 0.005	0.01	0.08	82.9

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	7.89	7.89	< 0.005	< 0.005	0.01	8.01
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	13.1	13.1	< 0.005	< 0.005	0.01	13.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Building Construction (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	2.90	2.90	< 0.005	< 0.005	—	2.91
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	0.48	0.48	< 0.005	< 0.005	—	0.48
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.03	0.36	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	86.3	86.3	< 0.005	< 0.005	0.01	87.5
Vendor	0.01	< 0.005	0.19	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	144	144	0.01	0.02	0.01	151
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.17	0.17	< 0.005	< 0.005	< 0.005	0.17
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.28	0.28	< 0.005	< 0.005	< 0.005	0.29
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.03	0.03	< 0.005	< 0.005	< 0.005	0.03
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.05	0.05	< 0.005	< 0.005	< 0.005	0.05
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.12. Building Construction (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	2.90	2.90	< 0.005	< 0.005	—	2.91
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	0.48	0.48	< 0.005	< 0.005	—	0.48
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.03	0.36	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	86.3	86.3	< 0.005	< 0.005	0.01	87.5
Vendor	0.01	< 0.005	0.19	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	144	144	0.01	0.02	0.01	151
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.17	0.17	< 0.005	< 0.005	< 0.005	0.17
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.28	0.28	< 0.005	< 0.005	< 0.005	0.29
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.03	0.03	< 0.005	< 0.005	< 0.005	0.03

Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.05	0.05	< 0.005	< 0.005	< 0.005	0.05
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.13. Building Construction (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.33	0.27	2.47	2.95	0.01	0.09	—	0.09	0.09	—	0.09	—	620	620	0.03	0.01	—	622
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.45	0.54	< 0.005	0.02	—	0.02	0.02	—	0.02	—	103	103	< 0.005	< 0.005	—	103
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.43	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	93.0	93.0	< 0.005	< 0.005	0.33	94.4
Vendor	0.01	0.01	0.19	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	147	147	0.01	0.02	0.36	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.38	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	87.8	87.8	< 0.005	< 0.005	0.01	89.0
Vendor	0.01	< 0.005	0.20	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	147	147	0.01	0.02	0.01	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.01	0.01	0.16	0.00	0.00	0.07	0.07	0.00	0.02	0.02	—	37.1	37.1	< 0.005	< 0.005	0.06	37.6
Vendor	< 0.005	< 0.005	0.08	0.04	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	—	61.7	61.7	< 0.005	0.01	0.07	64.5
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	6.14	6.14	< 0.005	< 0.005	0.01	6.23
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	10.2	10.2	< 0.005	< 0.005	0.01	10.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.14. Building Construction (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.33	0.27	2.47	2.95	0.01	0.09	—	0.09	0.09	—	0.09	—	620	620	0.03	0.01	—	622
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.45	0.54	< 0.005	0.02	—	0.02	0.02	—	0.02	—	103	103	< 0.005	< 0.005	—	103
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.43	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	93.0	93.0	< 0.005	< 0.005	0.33	94.4
Vendor	0.01	0.01	0.19	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	147	147	0.01	0.02	0.36	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.38	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	87.8	87.8	< 0.005	< 0.005	0.01	89.0

Vendor	0.01	< 0.005	0.20	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	147	147	0.01	0.02	0.01	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.01	0.01	0.16	0.00	0.00	0.07	0.07	0.00	0.02	0.02	—	37.1	37.1	< 0.005	< 0.005	0.06	37.6
Vendor	< 0.005	< 0.005	0.08	0.04	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	—	61.7	61.7	< 0.005	0.01	0.07	64.5
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	6.14	6.14	< 0.005	< 0.005	0.01	6.23
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	10.2	10.2	< 0.005	< 0.005	0.01	10.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.15. Building Construction (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.09	0.07	0.66	0.82	< 0.005	0.02	—	0.02	0.02	—	0.02	—	174	174	0.01	< 0.005	—	174

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.01	0.12	0.15	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	28.8	28.8	< 0.005	< 0.005	—	28.9
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.03	0.36	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	86.3	86.3	< 0.005	< 0.005	0.01	87.5
Vendor	0.01	< 0.005	0.19	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	144	144	0.01	0.02	0.01	151
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	10.2	10.2	< 0.005	< 0.005	0.02	10.4
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	16.9	16.9	< 0.005	< 0.005	0.02	17.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.69	1.69	< 0.005	< 0.005	< 0.005	1.72
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	2.81	2.81	< 0.005	< 0.005	< 0.005	2.93
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.16. Building Construction (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.09	0.07	0.66	0.82	< 0.005	0.02	—	0.02	0.02	—	0.02	—	174	174	0.01	< 0.005	—	174
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.01	0.12	0.15	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	28.8	28.8	< 0.005	< 0.005	—	28.9
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.03	0.36	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	86.3	86.3	< 0.005	< 0.005	0.01	87.5
Vendor	0.01	< 0.005	0.19	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	144	144	0.01	0.02	0.01	151
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	10.2	10.2	< 0.005	< 0.005	0.02	10.4
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	16.9	16.9	< 0.005	< 0.005	0.02	17.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.69	1.69	< 0.005	< 0.005	< 0.005	1.72
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	2.81	2.81	< 0.005	< 0.005	< 0.005	2.93
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.17. Building Construction (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.09	0.08	0.69	0.83	< 0.005	0.03	—	0.03	0.02	—	0.02	—	174	174	0.01	< 0.005	—	174
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.02	0.01	0.13	0.15	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	28.8	28.8	< 0.005	< 0.005	—	28.9
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.38	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	87.8	87.8	< 0.005	< 0.005	0.01	89.0
Vendor	0.01	< 0.005	0.20	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	147	147	0.01	0.02	0.01	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	10.4	10.4	< 0.005	< 0.005	0.02	10.6
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	17.3	17.3	< 0.005	< 0.005	0.02	18.1
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.72	1.72	< 0.005	< 0.005	< 0.005	1.75
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	2.87	2.87	< 0.005	< 0.005	< 0.005	2.99
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.18. Building Construction (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.09	0.08	0.69	0.83	< 0.005	0.03	—	0.03	0.02	—	0.02	—	174	174	0.01	< 0.005	—	174
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.01	0.13	0.15	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	28.8	28.8	< 0.005	< 0.005	—	28.9
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.03	0.38	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	87.8	87.8	< 0.005	< 0.005	0.01	89.0
Vendor	0.01	< 0.005	0.20	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	147	147	0.01	0.02	0.01	154
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	10.4	10.4	< 0.005	< 0.005	0.02	10.6
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	17.3	17.3	< 0.005	< 0.005	0.02	18.1
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.72	1.72	< 0.005	< 0.005	< 0.005	1.75
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	2.87	2.87	< 0.005	< 0.005	< 0.005	2.99
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.19. Building Construction (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.32	0.26	2.36	2.93	0.01	0.08	—	0.08	0.08	—	0.08	—	620	620	0.03	0.01	—	622

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.43	0.54	< 0.005	0.02	—	0.02	0.01	—	0.01	—	103	103	< 0.005	< 0.005	—	103
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.02	0.41	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	91.4	91.4	< 0.005	< 0.005	0.30	92.8
Vendor	0.01	0.01	0.18	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	144	144	0.01	0.02	0.32	151
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.03	0.36	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	86.3	86.3	< 0.005	< 0.005	0.01	87.5
Vendor	0.01	< 0.005	0.19	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	144	144	0.01	0.02	0.01	151
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.01	0.01	0.15	0.00	0.00	0.07	0.07	0.00	0.02	0.02	—	36.5	36.5	< 0.005	< 0.005	0.05	37.0
Vendor	< 0.005	< 0.005	0.08	0.04	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	—	60.4	60.4	< 0.005	0.01	0.06	63.1
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	6.04	6.04	< 0.005	< 0.005	0.01	6.12
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	10.0	10.0	< 0.005	< 0.005	0.01	10.4
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.20. Building Construction (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.32	0.26	2.36	2.93	0.01	0.08	—	0.08	0.08	—	0.08	—	620	620	0.03	0.01	—	622
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.43	0.54	< 0.005	0.02	—	0.02	0.01	—	0.01	—	103	103	< 0.005	< 0.005	—	103
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.02	0.41	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	91.4	91.4	< 0.005	< 0.005	0.30	92.8
Vendor	0.01	0.01	0.18	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	144	144	0.01	0.02	0.32	151
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.03	0.36	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	86.3	86.3	< 0.005	< 0.005	0.01	87.5
Vendor	0.01	< 0.005	0.19	0.09	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	144	144	0.01	0.02	0.01	151
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.01	0.01	0.15	0.00	0.00	0.07	0.07	0.00	0.02	0.02	—	36.5	36.5	< 0.005	< 0.005	0.05	37.0
Vendor	< 0.005	< 0.005	0.08	0.04	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	—	60.4	60.4	< 0.005	0.01	0.06	63.1
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	6.04	6.04	< 0.005	< 0.005	0.01	6.12
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	10.0	10.0	< 0.005	< 0.005	0.01	10.4
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.21. Paving (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.85	0.71	6.52	8.84	0.01	0.29	—	0.29	0.26	—	0.26	—	1,351	1,351	0.05	0.01	—	1,355
Paving	—	0.08	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.36	0.48	< 0.005	0.02	—	0.02	0.01	—	0.01	—	74.0	74.0	< 0.005	< 0.005	—	74.3
Paving	—	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.07	0.09	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	12.3	12.3	< 0.005	< 0.005	—	12.3
Paving	—	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.09	0.08	0.07	0.81	0.00	0.00	0.17	0.17	0.00	0.04	0.04	—	179	179	0.01	0.01	0.02	182
Vendor	0.01	0.01	0.21	0.10	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	150	150	0.01	0.02	0.01	157
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	9.91	9.91	< 0.005	< 0.005	0.02	10.1
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	8.23	8.23	< 0.005	< 0.005	0.01	8.60
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.64	1.64	< 0.005	< 0.005	< 0.005	1.66
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.36	1.36	< 0.005	< 0.005	< 0.005	1.42
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.22. Paving (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.85	0.71	6.52	8.84	0.01	0.29	—	0.29	0.26	—	0.26	—	1,351	1,351	0.05	0.01	—	1,355
Paving	—	0.08	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.36	0.48	< 0.005	0.02	—	0.02	0.01	—	0.01	—	74.0	74.0	< 0.005	< 0.005	—	74.3
Paving	—	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.07	0.09	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	12.3	12.3	< 0.005	< 0.005	—	12.3
Paving	—	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.09	0.08	0.07	0.81	0.00	0.00	0.17	0.17	0.00	0.04	0.04	—	179	179	0.01	0.01	0.02	182
Vendor	0.01	0.01	0.21	0.10	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	150	150	0.01	0.02	0.01	157
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	9.91	9.91	< 0.005	< 0.005	0.02	10.1
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	8.23	8.23	< 0.005	< 0.005	0.01	8.60
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.64	1.64	< 0.005	< 0.005	< 0.005	1.66
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.36	1.36	< 0.005	< 0.005	< 0.005	1.42
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.23. Architectural Coating (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	4.59	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.06	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.01	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.02	0.31	0.00	0.00	0.07	0.07	0.00	0.02	0.02	—	70.2	70.2	< 0.005	< 0.005	0.01	71.2
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	49.2	49.2	< 0.005	0.01	< 0.005	51.3
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.97	0.97	< 0.005	< 0.005	< 0.005	0.98
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.67	0.67	< 0.005	< 0.005	< 0.005	0.70
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.16	0.16	< 0.005	< 0.005	< 0.005	0.16
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.11	0.11	< 0.005	< 0.005	< 0.005	0.12
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.24. Architectural Coating (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	4.59	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.06	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.01	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.02	0.31	0.00	0.00	0.07	0.07	0.00	0.02	0.02	—	70.2	70.2	< 0.005	< 0.005	0.01	71.2
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	49.2	49.2	< 0.005	0.01	< 0.005	51.3
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.97	0.97	< 0.005	< 0.005	< 0.005	0.98
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.67	0.67	< 0.005	< 0.005	< 0.005	0.70

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.16	0.16	< 0.005	< 0.005	< 0.005	0.16
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.11	0.11	< 0.005	< 0.005	< 0.005	0.12
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.25. Architectural Coating (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	6.04	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.02	0.29	0.00	0.00	0.13	0.13	0.00	0.03	0.03	—	69.0	69.0	< 0.005	< 0.005	0.01	70.0
Vendor	< 0.005	< 0.005	0.06	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	48.1	48.1	< 0.005	0.01	< 0.005	50.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.91	1.91	< 0.005	< 0.005	< 0.005	1.94
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.32	1.32	< 0.005	< 0.005	< 0.005	1.38
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.32	0.32	< 0.005	< 0.005	< 0.005	0.32
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.22	0.22	< 0.005	< 0.005	< 0.005	0.23
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.26. Architectural Coating (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	6.04	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.02	0.29	0.00	0.00	0.13	0.13	0.00	0.03	0.03	—	69.0	69.0	< 0.005	< 0.005	0.01	70.0
Vendor	< 0.005	< 0.005	0.06	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	48.1	48.1	< 0.005	0.01	< 0.005	50.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.91	1.91	< 0.005	< 0.005	< 0.005	1.94
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.32	1.32	< 0.005	< 0.005	< 0.005	1.38
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.32	0.32	< 0.005	< 0.005	< 0.005	0.32
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.22	0.22	< 0.005	< 0.005	< 0.005	0.23
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.27. Architectural Coating (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Architect Coatings	—	6.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architect ural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architect ural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.02	0.29	0.00	0.00	0.13	0.13	0.00	0.03	0.03	—	69.0	69.0	< 0.005	< 0.005	0.01	70.0
Vendor	< 0.005	< 0.005	0.06	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	48.1	48.1	< 0.005	0.01	< 0.005	50.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.91	1.91	< 0.005	< 0.005	< 0.005	1.94
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.32	1.32	< 0.005	< 0.005	< 0.005	1.38
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.32	0.32	< 0.005	< 0.005	< 0.005	0.32
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.22	0.22	< 0.005	< 0.005	< 0.005	0.23
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.28. Architectural Coating (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	6.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.02	0.29	0.00	0.00	0.13	0.13	0.00	0.03	0.03	—	69.0	69.0	< 0.005	< 0.005	0.01	70.0
Vendor	< 0.005	< 0.005	0.06	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	48.1	48.1	< 0.005	0.01	< 0.005	50.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.91	1.91	< 0.005	< 0.005	< 0.005	1.94
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.32	1.32	< 0.005	< 0.005	< 0.005	1.38
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.32	0.32	< 0.005	< 0.005	< 0.005	0.32
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.22	0.22	< 0.005	< 0.005	< 0.005	0.23
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.29. Architectural Coating (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	6.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.02	0.33	0.00	0.00	0.13	0.13	0.00	0.03	0.03	—	73.1	73.1	< 0.005	< 0.005	0.24	74.2
Vendor	< 0.005	< 0.005	0.06	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	48.1	48.1	< 0.005	0.01	0.11	50.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.91	1.91	< 0.005	< 0.005	< 0.005	1.94
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.32	1.32	< 0.005	< 0.005	< 0.005	1.38
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.32	0.32	< 0.005	< 0.005	< 0.005	0.32
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.22	0.22	< 0.005	< 0.005	< 0.005	0.23
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.30. Architectural Coating (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	6.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.02	0.33	0.00	0.00	0.13	0.13	0.00	0.03	0.03	—	73.1	73.1	< 0.005	< 0.005	0.24	74.2
Vendor	< 0.005	< 0.005	0.06	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	48.1	48.1	< 0.005	0.01	0.11	50.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.91	1.91	< 0.005	< 0.005	< 0.005	1.94
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.32	1.32	< 0.005	< 0.005	< 0.005	1.38
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.32	0.32	< 0.005	< 0.005	< 0.005	0.32
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.22	0.22	< 0.005	< 0.005	< 0.005	0.23
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.31. Trenching (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.57	0.48	4.37	6.27	0.01	0.16	—	0.16	0.14	—	0.14	—	933	933	0.04	0.01	—	936
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.57	0.48	4.37	6.27	0.01	0.16	—	0.16	0.14	—	0.14	—	933	933	0.04	0.01	—	936
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.36	0.52	< 0.005	0.01	—	0.01	0.01	—	0.01	—	76.7	76.7	< 0.005	< 0.005	—	77.0

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.07	0.09	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	12.7	12.7	< 0.005	< 0.005	—	12.7
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.02	0.37	0.00	0.00	0.13	0.13	0.00	0.03	0.03	—	75.9	75.9	< 0.005	< 0.005	0.28	77.1
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	50.1	50.1	< 0.005	0.01	0.13	52.3
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.03	0.32	0.00	0.00	0.13	0.13	0.00	0.03	0.03	—	71.7	71.7	< 0.005	< 0.005	0.01	72.6
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	50.1	50.1	< 0.005	0.01	< 0.005	52.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	5.94	5.94	< 0.005	< 0.005	0.01	6.03
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	4.11	4.11	< 0.005	< 0.005	< 0.005	4.30
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.98	0.98	< 0.005	< 0.005	< 0.005	1.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.68	0.68	< 0.005	< 0.005	< 0.005	0.71
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.32. Trenching (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.57	0.48	4.37	6.27	0.01	0.16	—	0.16	0.14	—	0.14	—	933	933	0.04	0.01	—	936
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.57	0.48	4.37	6.27	0.01	0.16	—	0.16	0.14	—	0.14	—	933	933	0.04	0.01	—	936
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.36	0.52	< 0.005	0.01	—	0.01	0.01	—	0.01	—	76.7	76.7	< 0.005	< 0.005	—	77.0
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.07	0.09	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	12.7	12.7	< 0.005	< 0.005	—	12.7
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.02	0.37	0.00	0.00	0.13	0.13	0.00	0.03	0.03	—	75.9	75.9	< 0.005	< 0.005	0.28	77.1
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	50.1	50.1	< 0.005	0.01	0.13	52.3
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.03	0.32	0.00	0.00	0.13	0.13	0.00	0.03	0.03	—	71.7	71.7	< 0.005	< 0.005	0.01	72.6
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	50.1	50.1	< 0.005	0.01	< 0.005	52.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	5.94	5.94	< 0.005	< 0.005	0.01	6.03
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	4.11	4.11	< 0.005	< 0.005	< 0.005	4.30
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.98	0.98	< 0.005	< 0.005	< 0.005	1.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.68	0.68	< 0.005	< 0.005	< 0.005	0.71
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	1.14	1.04	0.71	7.59	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,899	1,899	0.09	0.07	5.77	1,928
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	1.14	1.04	0.71	7.59	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,899	1,899	0.09	0.07	5.77	1,928
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	1.12	1.02	0.78	7.15	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,815	1,815	0.09	0.08	0.15	1,840
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	1.12	1.02	0.78	7.15	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,815	1,815	0.09	0.08	0.15	1,840
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	0.20	0.18	0.14	1.30	< 0.005	< 0.005	0.12	0.12	< 0.005	0.02	0.02	—	303	303	0.01	0.01	0.41	307
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.20	0.18	0.14	1.30	< 0.005	< 0.005	0.12	0.12	< 0.005	0.02	0.02	—	303	303	0.01	0.01	0.41	307

4.1.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	1.14	1.04	0.71	7.59	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,899	1,899	0.09	0.07	5.77	1,928
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	1.14	1.04	0.71	7.59	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,899	1,899	0.09	0.07	5.77	1,928
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	1.12	1.02	0.78	7.15	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,815	1,815	0.09	0.08	0.15	1,840
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	1.12	1.02	0.78	7.15	0.02	0.01	0.65	0.66	0.01	0.11	0.13	—	1,815	1,815	0.09	0.08	0.15	1,840
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	0.20	0.18	0.14	1.30	< 0.005	< 0.005	0.12	0.12	< 0.005	0.02	0.02	—	303	303	0.01	0.01	0.41	307
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.20	0.18	0.14	1.30	< 0.005	< 0.005	0.12	0.12	< 0.005	0.02	0.02	—	303	303	0.01	0.01	0.41	307

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	43.6	43.6	0.03	< 0.005	—	45.6
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	43.6	43.6	0.03	< 0.005	—	45.6
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	43.6	43.6	0.03	< 0.005	—	45.6
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	43.6	43.6	0.03	< 0.005	—	45.6
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	7.22	7.22	0.01	< 0.005	—	7.55
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	7.22	7.22	0.01	< 0.005	—	7.55

4.2.2. Electricity Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	19.9	19.9	0.01	< 0.005	—	20.8
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	19.9	19.9	0.01	< 0.005	—	20.8
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	19.9	19.9	0.01	< 0.005	—	20.8
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	19.9	19.9	0.01	< 0.005	—	20.8
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	3.30	3.30	< 0.005	< 0.005	—	3.45
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	3.30	3.30	< 0.005	< 0.005	—	3.45

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

4.2.4. Natural Gas Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	> -0.005	> -0.005	-0.01	> -0.005	> -0.005	> -0.005	—	> -0.005	> -0.005	—	> -0.005	—	-8.62	-8.62	> -0.005	> -0.005	—	-8.65
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	> -0.005	> -0.005	-0.01	> -0.005	> -0.005	> -0.005	—	> -0.005	> -0.005	—	> -0.005	—	-8.62	-8.62	> -0.005	> -0.005	—	-8.65
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	> -0.005	> -0.005	-0.01	> -0.005	> -0.005	> -0.005	—	> -0.005	> -0.005	—	> -0.005	—	-8.62	-8.62	> -0.005	> -0.005	—	-8.65
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	> -0.005	> -0.005	-0.01	> -0.005	> -0.005	> -0.005	—	> -0.005	> -0.005	—	> -0.005	—	-8.62	-8.62	> -0.005	> -0.005	—	-8.65
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	> -0.005	> -0.005	> -0.005	> -0.005	> -0.005	> -0.005	—	> -0.005	> -0.005	—	> -0.005	—	-1.43	-1.43	> -0.005	> -0.005	—	-1.43
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	> -0.005	> -0.005	> -0.005	> -0.005	> -0.005	> -0.005	—	> -0.005	> -0.005	—	> -0.005	—	-1.43	-1.43	> -0.005	> -0.005	—	-1.43

4.3. Area Emissions by Source

4.3.2. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Consumer Products	—	1.83	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	0.00	1.97	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Consumer Products	—	1.83	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	0.00	1.97	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.15	0.15	< 0.005	< 0.005	—	0.16
Consumer Products	—	0.33	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	0.00	0.36	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.15	0.15	< 0.005	< 0.005	—	0.16

4.3.1. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Consumer Products	—	1.83	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	0.00	1.97	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Consumer Products	—	1.83	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	0.00	1.97	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	4.02	4.02	< 0.005	< 0.005	—	4.20
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.15	0.15	< 0.005	< 0.005	—	0.16
Consumer Products	—	0.33	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Total	0.00	0.36	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.15	0.15	< 0.005	< 0.005	—	0.16

4.4. Water Emissions by Land Use

4.4.2. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	0.30	0.41	0.71	0.03	< 0.005	—	1.72

Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	0.30	0.41	0.71	0.03	< 0.005	—	1.72

4.4.1. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1.82	2.46	4.28	0.19	< 0.005	—	10.4
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	0.30	0.41	0.71	0.03	< 0.005	—	1.72

Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	0.30	0.41	0.71	0.03	< 0.005	—	1.72

4.5. Waste Emissions by Land Use

4.5.2. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	1.59	0.00	1.59	0.16	0.00	—	5.55
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1.59	0.00	1.59	0.16	0.00	—	5.55

4.5.1. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	9.58	0.00	9.58	0.96	0.00	—	33.5
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	1.59	0.00	1.59	0.16	0.00	—	5.55
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1.59	0.00	1.59	0.16	0.00	—	5.55

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.10	0.10
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.10	0.10

4.6.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.61	0.61
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Single Family Housing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.10	0.10
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.10	0.10

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.7.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipme Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.8.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.9.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Sequest	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Demolition	Demolition	8/1/2025	8/4/2025	5.00	2.00	—
Site Preparation	Site Preparation	8/5/2025	8/8/2025	5.00	4.00	—
Grading	Grading	8/11/2025	10/10/2025	5.00	45.0	—
Building Construction Ph1	Building Construction	2/2/2026	10/2/2026	5.00	175	Bldg Ph1
Building Construction Ph2	Building Construction	4/1/2026	1/1/2027	5.00	198	Bldg Ph2
Building Construction Ph3	Building Construction	6/1/2026	3/1/2027	5.00	196	Bldg Ph3
Building Construction Ph4	Building Construction	11/2/2026	8/2/2027	5.00	196	Bldg Ph4
Paving	Paving	10/13/2025	11/7/2025	5.00	20.0	—
Architectural Coating Ph1	Architectural Coating	10/3/2026	10/9/2026	5.00	5.00	ArchCoating Ph1

Architectural Coating Ph2	Architectural Coating	1/4/2027	1/15/2027	5.00	10.0	Arch Coating Ph2
Architectural Coating Ph3	Architectural Coating	3/2/2027	3/15/2027	5.00	10.0	Arch Coating Ph3
Architectural Coating Ph4	Architectural Coating	8/3/2027	8/16/2027	5.00	10.0	Arch Coating Ph4
Utilities	Trenching	8/25/2025	10/3/2025	5.00	30.0	—

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Demolition	Concrete/Industrial Saws	Diesel	Average	1.00	8.00	33.0	0.73
Demolition	Excavators	Diesel	Average	3.00	8.00	36.0	0.38
Demolition	Rubber Tired Dozers	Diesel	Average	2.00	8.00	367	0.40
Site Preparation	Rubber Tired Dozers	Diesel	Average	3.00	8.00	367	0.40
Site Preparation	Tractors/Loaders/Backhoes	Diesel	Average	4.00	8.00	84.0	0.37
Grading	Excavators	Diesel	Average	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Average	1.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Average	1.00	8.00	367	0.40
Grading	Tractors/Loaders/Backhoes	Diesel	Average	3.00	8.00	84.0	0.37
Building Construction Ph1	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph1	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph1	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph1	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37

Building Construction Ph1	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Building Construction Ph2	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph2	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph2	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph2	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Building Construction Ph2	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Building Construction Ph3	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph3	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph3	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph3	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Building Construction Ph3	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Building Construction Ph4	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph4	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph4	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph4	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Building Construction Ph4	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Average	1.00	8.00	81.0	0.42

Paving	Paving Equipment	Diesel	Average	2.00	6.00	89.0	0.36
Paving	Rollers	Diesel	Average	2.00	6.00	36.0	0.38
Paving	Cement and Mortar Mixers	Diesel	Average	2.00	6.00	10.0	0.56
Paving	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37
Architectural Coating Ph1	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph2	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph3	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph4	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Utilities	Excavators	Diesel	Average	1.00	8.00	36.0	0.38
Utilities	Plate Compactors	Diesel	Average	1.00	8.00	8.00	0.43
Utilities	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37

5.2.2. Mitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Demolition	Concrete/Industrial Saws	Diesel	Average	1.00	8.00	33.0	0.73
Demolition	Excavators	Diesel	Average	3.00	8.00	36.0	0.38
Demolition	Rubber Tired Dozers	Diesel	Average	2.00	8.00	367	0.40
Site Preparation	Rubber Tired Dozers	Diesel	Average	3.00	8.00	367	0.40
Site Preparation	Tractors/Loaders/Backhoes	Diesel	Average	4.00	8.00	84.0	0.37
Grading	Excavators	Diesel	Average	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Average	1.00	8.00	148	0.41

Grading	Rubber Tired Dozers	Diesel	Average	1.00	8.00	367	0.40
Grading	Tractors/Loaders/Backhoes	Diesel	Average	3.00	8.00	84.0	0.37
Building Construction Ph1	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph1	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph1	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph1	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Building Construction Ph1	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Building Construction Ph2	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph2	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph2	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph2	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Building Construction Ph2	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Building Construction Ph3	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph3	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph3	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph3	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Building Construction Ph3	Welders	Diesel	Average	1.00	8.00	46.0	0.45

Building Construction Ph4	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph4	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph4	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph4	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Building Construction Ph4	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Average	1.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	2.00	6.00	89.0	0.36
Paving	Rollers	Diesel	Average	2.00	6.00	36.0	0.38
Paving	Cement and Mortar Mixers	Diesel	Average	2.00	6.00	10.0	0.56
Paving	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37
Architectural Coating Ph1	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph2	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph3	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph4	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Utilities	Excavators	Diesel	Average	1.00	8.00	36.0	0.38
Utilities	Plate Compactors	Diesel	Average	1.00	8.00	8.00	0.43
Utilities	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Demolition	—	—	—	—
Demolition	Worker	16.0	12.0	LDA,LDT1,LDT2
Demolition	Vendor	2.00	7.63	HHDT,MHDT
Demolition	Hauling	2.00	20.0	HHDT
Demolition	Onsite truck	0.00	0.00	HHDT
Site Preparation	—	—	—	—
Site Preparation	Worker	18.0	12.0	LDA,LDT1,LDT2
Site Preparation	Vendor	2.00	7.63	HHDT,MHDT
Site Preparation	Hauling	2.00	20.0	HHDT
Site Preparation	Onsite truck	0.00	0.00	HHDT
Grading	—	—	—	—
Grading	Worker	16.0	12.0	LDA,LDT1,LDT2
Grading	Vendor	2.00	7.63	HHDT,MHDT
Grading	Hauling	2.00	20.0	HHDT
Grading	Onsite truck	0.00	—	HHDT
Building Construction Ph1	—	—	—	—
Building Construction Ph1	Worker	10.0	12.0	LDA,LDT1,LDT2
Building Construction Ph1	Vendor	6.00	7.63	HHDT,MHDT
Building Construction Ph1	Hauling	0.00	20.0	HHDT
Building Construction Ph1	Onsite truck	0.00	—	HHDT
Paving	—	—	—	—
Paving	Worker	20.0	12.0	LDA,LDT1,LDT2
Paving	Vendor	6.00	7.63	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	0.00	—	HHDT

Architectural Coating Ph1	—	—	—	—
Architectural Coating Ph1	Worker	8.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph1	Vendor	2.00	7.63	HHDT,MHDT
Architectural Coating Ph1	Hauling	0.00	20.0	HHDT
Architectural Coating Ph1	Onsite truck	0.00	—	HHDT
Building Construction Ph2	—	—	—	—
Building Construction Ph2	Worker	10.0	12.0	LDA,LDT1,LDT2
Building Construction Ph2	Vendor	6.00	7.63	HHDT,MHDT
Building Construction Ph2	Hauling	0.00	20.0	HHDT
Building Construction Ph2	Onsite truck	0.00	—	HHDT
Building Construction Ph3	—	—	—	—
Building Construction Ph3	Worker	10.0	12.0	LDA,LDT1,LDT2
Building Construction Ph3	Vendor	6.00	7.63	HHDT,MHDT
Building Construction Ph3	Hauling	0.00	20.0	HHDT
Building Construction Ph3	Onsite truck	0.00	—	HHDT
Building Construction Ph4	—	—	—	—
Building Construction Ph4	Worker	10.0	12.0	LDA,LDT1,LDT2
Building Construction Ph4	Vendor	6.00	7.63	HHDT,MHDT
Building Construction Ph4	Hauling	0.00	20.0	HHDT
Building Construction Ph4	Onsite truck	0.00	—	HHDT
Architectural Coating Ph2	—	—	—	—
Architectural Coating Ph2	Worker	8.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph2	Vendor	2.00	7.63	HHDT,MHDT
Architectural Coating Ph2	Hauling	0.00	20.0	HHDT
Architectural Coating Ph2	Onsite truck	0.00	—	HHDT
Architectural Coating Ph3	—	—	—	—
Architectural Coating Ph3	Worker	8.00	12.0	LDA,LDT1,LDT2

Architectural Coating Ph3	Vendor	2.00	7.63	HHDT,MHDT
Architectural Coating Ph3	Hauling	0.00	20.0	HHDT
Architectural Coating Ph3	Onsite truck	0.00	—	HHDT
Architectural Coating Ph4	—	—	—	—
Architectural Coating Ph4	Worker	8.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph4	Vendor	2.00	7.63	HHDT,MHDT
Architectural Coating Ph4	Hauling	0.00	20.0	HHDT
Architectural Coating Ph4	Onsite truck	0.00	—	HHDT
Utilities	—	—	—	—
Utilities	Worker	8.00	12.0	LDA,LDT1,LDT2
Utilities	Vendor	2.00	7.63	HHDT,MHDT
Utilities	Hauling	0.00	20.0	HHDT
Utilities	Onsite truck	0.00	—	HHDT

5.3.2. Mitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Demolition	—	—	—	—
Demolition	Worker	16.0	12.0	LDA,LDT1,LDT2
Demolition	Vendor	2.00	7.63	HHDT,MHDT
Demolition	Hauling	2.00	20.0	HHDT
Demolition	Onsite truck	0.00	0.00	HHDT
Site Preparation	—	—	—	—
Site Preparation	Worker	18.0	12.0	LDA,LDT1,LDT2
Site Preparation	Vendor	2.00	7.63	HHDT,MHDT
Site Preparation	Hauling	2.00	20.0	HHDT
Site Preparation	Onsite truck	0.00	0.00	HHDT
Grading	—	—	—	—

Grading	Worker	16.0	12.0	LDA,LDT1,LDT2
Grading	Vendor	2.00	7.63	HHDT,MHDT
Grading	Hauling	2.00	20.0	HHDT
Grading	Onsite truck	0.00	—	HHDT
Building Construction Ph1	—	—	—	—
Building Construction Ph1	Worker	10.0	12.0	LDA,LDT1,LDT2
Building Construction Ph1	Vendor	6.00	7.63	HHDT,MHDT
Building Construction Ph1	Hauling	0.00	20.0	HHDT
Building Construction Ph1	Onsite truck	0.00	—	HHDT
Paving	—	—	—	—
Paving	Worker	20.0	12.0	LDA,LDT1,LDT2
Paving	Vendor	6.00	7.63	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	0.00	—	HHDT
Architectural Coating Ph1	—	—	—	—
Architectural Coating Ph1	Worker	8.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph1	Vendor	2.00	7.63	HHDT,MHDT
Architectural Coating Ph1	Hauling	0.00	20.0	HHDT
Architectural Coating Ph1	Onsite truck	0.00	—	HHDT
Building Construction Ph2	—	—	—	—
Building Construction Ph2	Worker	10.0	12.0	LDA,LDT1,LDT2
Building Construction Ph2	Vendor	6.00	7.63	HHDT,MHDT
Building Construction Ph2	Hauling	0.00	20.0	HHDT
Building Construction Ph2	Onsite truck	0.00	—	HHDT
Building Construction Ph3	—	—	—	—
Building Construction Ph3	Worker	10.0	12.0	LDA,LDT1,LDT2
Building Construction Ph3	Vendor	6.00	7.63	HHDT,MHDT

Building Construction Ph3	Hauling	0.00	20.0	HHDT
Building Construction Ph3	Onsite truck	0.00	—	HHDT
Building Construction Ph4	—	—	—	—
Building Construction Ph4	Worker	10.0	12.0	LDA,LDT1,LDT2
Building Construction Ph4	Vendor	6.00	7.63	HHDT,MHDT
Building Construction Ph4	Hauling	0.00	20.0	HHDT
Building Construction Ph4	Onsite truck	0.00	—	HHDT
Architectural Coating Ph2	—	—	—	—
Architectural Coating Ph2	Worker	8.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph2	Vendor	2.00	7.63	HHDT,MHDT
Architectural Coating Ph2	Hauling	0.00	20.0	HHDT
Architectural Coating Ph2	Onsite truck	0.00	—	HHDT
Architectural Coating Ph3	—	—	—	—
Architectural Coating Ph3	Worker	8.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph3	Vendor	2.00	7.63	HHDT,MHDT
Architectural Coating Ph3	Hauling	0.00	20.0	HHDT
Architectural Coating Ph3	Onsite truck	0.00	—	HHDT
Architectural Coating Ph4	—	—	—	—
Architectural Coating Ph4	Worker	8.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph4	Vendor	2.00	7.63	HHDT,MHDT
Architectural Coating Ph4	Hauling	0.00	20.0	HHDT
Architectural Coating Ph4	Onsite truck	0.00	—	HHDT
Utilities	—	—	—	—
Utilities	Worker	8.00	12.0	LDA,LDT1,LDT2
Utilities	Vendor	2.00	7.63	HHDT,MHDT
Utilities	Hauling	0.00	20.0	HHDT
Utilities	Onsite truck	0.00	—	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating Ph1	7,101	2,367	0.00	0.00	219
Architectural Coating Ph2	18,936	6,312	0.00	0.00	401
Architectural Coating Ph3	18,936	6,312	0.00	0.00	474
Architectural Coating Ph4	18,936	6,312	0.00	0.00	474

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (Cubic Yards)	Material Exported (Cubic Yards)	Acres Graded (acres)	Material Demolished (Building Square Footage)	Acres Paved (acres)
Demolition	0.00	0.00	0.00	0.00	—
Site Preparation	0.00	0.00	15.0	0.00	—
Grading	200	0.00	90.0	0.00	—
Paving	0.00	0.00	0.00	0.00	0.90

5.6.2. Construction Earthmoving Control Strategies

Non-applicable. No control strategies activated by user.

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Single Family Housing	0.30	0%

Other Asphalt Surfaces	0.60	100%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2025	0.00	589	0.03	< 0.005
2026	327	589	0.03	< 0.005
2027	424	589	0.03	< 0.005

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Single Family Housing	270	270	270	98,550	2,341	2,341	2,341	854,457
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

5.9.2. Mitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Single Family Housing	270	270	270	98,550	2,341	2,341	2,341	854,457
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

Hearth Type	Unmitigated (number)
Single Family Housing	—
Wood Fireplaces	0
Gas Fireplaces	0
Propane Fireplaces	0
Electric Fireplaces	27
No Fireplaces	3
Conventional Wood Stoves	0
Catalytic Wood Stoves	0
Non-Catalytic Wood Stoves	0
Pellet Wood Stoves	0

5.10.1.2. Mitigated

Hearth Type	Unmitigated (number)
Single Family Housing	—
Wood Fireplaces	0
Gas Fireplaces	0
Propane Fireplaces	0
Electric Fireplaces	27
No Fireplaces	3
Conventional Wood Stoves	0
Catalytic Wood Stoves	0
Non-Catalytic Wood Stoves	0
Pellet Wood Stoves	0

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
172530	57,510	0.00	0.00	1,568

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.10.4. Landscape Equipment - Mitigated

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Single Family Housing	353,072	45.1	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	45.1	0.0330	0.0040	0.00

5.11.2. Mitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)

Single Family Housing	161,426	45.1	0.0330	0.0040	-26,909
Other Asphalt Surfaces	0.00	45.1	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Single Family Housing	948,593	2,537,021
Other Asphalt Surfaces	0.00	0.00

5.12.2. Mitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Single Family Housing	948,593	2,537,021
Other Asphalt Surfaces	0.00	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Single Family Housing	17.8	—
Other Asphalt Surfaces	0.00	—

5.13.2. Mitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Single Family Housing	17.8	—
Other Asphalt Surfaces	0.00	—

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Single Family Housing	Average room A/C & Other residential A/C and heat pumps	R-410A	2,088	< 0.005	2.50	2.50	10.0
Single Family Housing	Household refrigerators and/or freezers	R-134a	1,430	0.12	0.60	0.00	1.00

5.14.2. Mitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Single Family Housing	Average room A/C & Other residential A/C and heat pumps	R-410A	2,088	< 0.005	2.50	2.50	10.0
Single Family Housing	Household refrigerators and/or freezers	R-134a	1,430	0.12	0.60	0.00	1.00

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

5.15.2. Mitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)

5.17. User Defined

Equipment Type	Fuel Type
—	—

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

5.18.2.2. Mitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	10.8	annual days of extreme heat
Extreme Precipitation	2.10	annual days with precipitation above 20 mm
Sea Level Rise	0.00	meters of inundation depth
Wildfire	0.00	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	0	0	N/A
Wildfire	1	0	0	N/A
Flooding	0	0	0	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	1	1	1	2
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A

Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	—
AQ-Ozone	35.2
AQ-PM	40.4
AQ-DPM	72.3
Drinking Water	9.00
Lead Risk Housing	24.6
Pesticides	3.79
Toxic Releases	13.6
Traffic	78.7
Effect Indicators	—
CleanUp Sites	0.00
Groundwater	77.5
Haz Waste Facilities/Generators	72.0
Impaired Water Bodies	58.7
Solid Waste	0.00

Sensitive Population	—
Asthma	4.26
Cardio-vascular	13.1
Low Birth Weights	84.2
Socioeconomic Factor Indicators	—
Education	41.2
Housing	60.9
Linguistic	37.7
Poverty	24.4
Unemployment	7.77

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	—
Above Poverty	51.52059541
Employed	53.74053638
Median HI	62.06852303
Education	—
Bachelor's or higher	73.29654818
High school enrollment	100
Preschool enrollment	41.72975747
Transportation	—
Auto Access	71.35891184
Active commuting	51.99538047
Social	—
2-parent households	77.03066855

Voting	73.74566919
Neighborhood	—
Alcohol availability	61.11895291
Park access	53.31707943
Retail density	86.1157449
Supermarket access	59.7330938
Tree canopy	34.96727833
Housing	—
Homeownership	33.28628256
Housing habitability	50.05774413
Low-inc homeowner severe housing cost burden	37.03323495
Low-inc renter severe housing cost burden	54.86975491
Uncrowded housing	46.83690491
Health Outcomes	—
Insured adults	36.50712178
Arthritis	0.0
Asthma ER Admissions	96.9
High Blood Pressure	0.0
Cancer (excluding skin)	0.0
Asthma	0.0
Coronary Heart Disease	0.0
Chronic Obstructive Pulmonary Disease	0.0
Diagnosed Diabetes	0.0
Life Expectancy at Birth	35.6
Cognitively Disabled	96.9
Physically Disabled	71.5
Heart Attack ER Admissions	97.2

Mental Health Not Good	0.0
Chronic Kidney Disease	0.0
Obesity	0.0
Pedestrian Injuries	76.8
Physical Health Not Good	0.0
Stroke	0.0
Health Risk Behaviors	—
Binge Drinking	0.0
Current Smoker	0.0
No Leisure Time for Physical Activity	0.0
Climate Change Exposures	—
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	19.9
Elderly	34.9
English Speaking	58.3
Foreign-born	43.6
Outdoor Workers	54.3
Climate Change Adaptive Capacity	—
Impervious Surface Cover	34.8
Traffic Density	95.2
Traffic Access	23.0
Other Indices	—
Hardship	44.0
Other Decision Support	—
2016 Voting	90.2

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	28.0
Healthy Places Index Score for Project Location (b)	64.0
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	No
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.
b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Land Use	Project-specific assumptions.
Construction: Construction Phases	Project Schedule
Construction: Off-Road Equipment	Equipment added for utilities. Building construction equipment reduced for small number of homes. Electric hookups during building construction and electric air compressors.
Construction: Dust From Material Movement	200 cy of fill.
Construction: Trips and VMT	Assumed even numbered trips.
Construction: Architectural Coatings	Divided square footage by phase.
Operations: Vehicle Data	Based on Project LTA

Operations: Hearths	No woodburning devices or natural gas devices.
Operations: Energy Use	No natural gas

Encinitas Ocean Bluffs Residential Project - HRA Detailed Report

Table of Contents

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	Encinitas Ocean Bluffs Residential Project - HRA
Construction Start Date	8/1/2025
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	2.20
Precipitation (days)	22.4
Location	501 Ocean Bluff Way, Encinitas, CA 92024, USA
County	San Diego
City	Encinitas
Air District	San Diego County APCD
Air Basin	San Diego
TAZ	6218
EDFZ	12
Electric Utility	San Diego Gas & Electric
Gas Utility	San Diego Gas & Electric
App Version	2022.1.1.13

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description
Single Family Housing	27.0	Dwelling Unit	4.30	85,200	138,900	0.00	75.0	—

Other Asphalt Surfaces	0.60	Acre	0.60	0.00	0.00	0.00	—	—

1.3. User-Selected Emission Reduction Measures by Emissions Sector

Sector	#	Measure Title
Construction	C-5	Use Advanced Engine Tiers
Construction	C-10-A	Water Exposed Surfaces
Construction	C-10-B	Water Active Demolition Sites
Construction	C-10-C	Water Unpaved Construction Roads
Construction	C-11	Limit Vehicle Speeds on Unpaved Roads
Construction	C-12	Sweep Paved Roads
Energy	E-10-B	Establish Onsite Renewable Energy Systems: Solar Power
Energy	E-12-A	Install Alternative Type of Water Heater in Place of Gas Storage Tank Heater in Residences
Energy	E-12-B	Install Electric Space Heater in Place of Natural Gas Heaters in Residences
Energy	E-13	Install Electric Ranges in Place of Gas Ranges

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	3.94	6.07	31.7	30.2	0.05	1.37	19.7	21.0	1.26	10.1	11.4	—	5,304	5,304	0.22	0.04	0.04	5,323
Mit.	0.65	6.07	16.5	28.3	0.05	0.21	7.67	7.77	0.20	3.94	4.04	—	5,304	5,304	0.22	0.04	0.04	5,323

% Reduced	84%	—	48%	6%	—	84%	61%	63%	84%	61%	64%	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	2.65	7.30	20.7	24.2	0.04	0.88	7.08	7.96	0.81	3.43	4.23	—	4,475	4,475	0.19	0.04	< 0.005	4,492
Mit.	0.59	6.43	16.5	26.0	0.04	0.21	2.76	2.91	0.20	1.34	1.48	—	4,475	4,475	0.19	0.04	< 0.005	4,492
% Reduced	78%	12%	20%	-7%	—	76%	61%	63%	75%	61%	65%	—	—	—	—	—	—	—
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.22	1.08	9.27	11.0	0.02	0.34	1.09	1.23	0.32	0.53	0.66	—	2,318	2,318	0.10	0.02	0.01	2,327
Mit.	0.31	0.60	8.55	13.5	0.02	0.11	0.42	0.45	0.11	0.21	0.23	—	2,318	2,318	0.10	0.02	0.01	2,327
% Reduced	75%	44%	8%	-22%	—	68%	61%	63%	67%	61%	65%	—	—	—	—	—	—	—
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.22	0.20	1.69	2.01	< 0.005	0.06	0.20	0.22	0.06	0.10	0.12	—	384	384	0.02	< 0.005	< 0.005	385
Mit.	0.06	0.11	1.56	2.46	< 0.005	0.02	0.08	0.08	0.02	0.04	0.04	—	384	384	0.02	< 0.005	< 0.005	385
% Reduced	75%	44%	8%	-22%	—	68%	61%	63%	67%	61%	65%	—	—	—	—	—	—	—
Exceeds (Daily Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Threshold	—	75.0	250	550	250	—	—	100	—	—	55.0	—	—	—	—	—	—	—
Unmit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Mit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Exceeds (Average Daily)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Threshold	—	75.0	250	550	250	—	—	100	—	—	55.0	—	—	—	—	—	—	—
Unmit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Mit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	3.94	3.31	31.7	30.2	0.05	1.37	19.7	21.0	1.26	10.1	11.4	—	5,304	5,304	0.22	0.04	0.01	5,323
2026	2.36	1.97	17.9	21.2	0.04	0.66	0.01	0.67	0.61	< 0.005	0.61	—	4,475	4,475	0.19	0.04	0.04	4,492
2027	0.76	6.07	5.69	7.05	0.01	0.20	< 0.005	0.20	0.18	< 0.005	0.18	—	1,492	1,492	0.06	0.01	0.01	1,498
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	2.65	2.22	20.7	24.2	0.04	0.88	7.08	7.96	0.81	3.43	4.23	—	3,905	3,905	0.16	0.03	< 0.005	3,919
2026	2.36	5.91	17.9	21.2	0.04	0.66	0.01	0.67	0.61	< 0.005	0.61	—	4,475	4,475	0.19	0.04	< 0.005	4,492
2027	2.27	7.30	17.1	21.2	0.04	0.60	0.01	0.61	0.55	< 0.005	0.55	—	4,475	4,475	0.19	0.04	< 0.005	4,492
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.41	0.35	3.20	3.66	0.01	0.14	1.09	1.23	0.13	0.53	0.66	—	595	595	0.02	0.01	< 0.005	597
2026	1.22	1.08	9.27	11.0	0.02	0.34	< 0.005	0.35	0.32	< 0.005	0.32	—	2,318	2,318	0.10	0.02	0.01	2,327
2027	0.41	0.84	3.06	3.80	0.01	0.11	< 0.005	0.11	0.10	< 0.005	0.10	—	803	803	0.03	0.01	< 0.005	807
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.07	0.06	0.58	0.67	< 0.005	0.03	0.20	0.22	0.02	0.10	0.12	—	98.4	98.4	< 0.005	< 0.005	< 0.005	98.8
2026	0.22	0.20	1.69	2.01	< 0.005	0.06	< 0.005	0.06	0.06	< 0.005	0.06	—	384	384	0.02	< 0.005	< 0.005	385
2027	0.07	0.15	0.56	0.69	< 0.005	0.02	< 0.005	0.02	0.02	< 0.005	0.02	—	133	133	0.01	< 0.005	< 0.005	134

2.3. Construction Emissions by Year, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.65	0.64	14.8	28.3	0.05	0.20	7.67	7.77	0.19	3.94	4.04	—	5,304	5,304	0.22	0.04	0.01	5,323
2026	0.59	0.59	16.5	26.0	0.04	0.21	0.01	0.22	0.20	< 0.005	0.21	—	4,475	4,475	0.19	0.04	0.04	4,492
2027	0.20	6.07	5.50	8.66	0.01	0.07	< 0.005	0.07	0.07	< 0.005	0.07	—	1,492	1,492	0.06	0.01	0.01	1,498
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.59	0.56	13.4	21.5	0.03	0.15	2.76	2.91	0.14	1.34	1.48	—	3,508	3,508	0.14	0.03	< 0.005	3,520
2026	0.59	4.99	16.5	26.0	0.04	0.21	0.01	0.22	0.20	< 0.005	0.21	—	4,475	4,475	0.19	0.04	< 0.005	4,492
2027	0.59	6.43	16.5	26.0	0.04	0.21	0.01	0.22	0.20	< 0.005	0.21	—	4,475	4,475	0.19	0.04	< 0.005	4,492
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.10	0.10	2.15	3.45	0.01	0.02	0.42	0.45	0.02	0.21	0.23	—	566	566	0.02	< 0.005	< 0.005	569
2026	0.31	0.37	8.55	13.5	0.02	0.11	< 0.005	0.11	0.11	< 0.005	0.11	—	2,318	2,318	0.10	0.02	0.01	2,327
2027	0.11	0.60	2.96	4.66	0.01	0.04	< 0.005	0.04	0.04	< 0.005	0.04	—	803	803	0.03	0.01	< 0.005	807
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.02	0.02	0.39	0.63	< 0.005	< 0.005	0.08	0.08	< 0.005	0.04	0.04	—	93.8	93.8	< 0.005	< 0.005	< 0.005	94.1
2026	0.06	0.07	1.56	2.46	< 0.005	0.02	< 0.005	0.02	0.02	< 0.005	0.02	—	384	384	0.02	< 0.005	< 0.005	385
2027	0.02	0.11	0.54	0.85	< 0.005	0.01	< 0.005	0.01	0.01	< 0.005	0.01	—	133	133	0.01	< 0.005	< 0.005	134

3. Construction Emissions Details

3.1. Demolition (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.86	2.40	22.2	19.9	0.03	0.92	—	0.92	0.84	—	0.84	—	3,425	3,425	0.14	0.03	—	3,437
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.01	0.12	0.11	< 0.005	0.01	—	0.01	< 0.005	—	< 0.005	—	18.8	18.8	< 0.005	< 0.005	—	18.8
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	3.11	3.11	< 0.005	< 0.005	—	3.12
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.76	3.76	< 0.005	< 0.005	< 0.005	3.95
Hauling	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.20	5.20	< 0.005	< 0.005	< 0.005	5.48
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.02	0.02	< 0.005	< 0.005	< 0.005	0.02
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.03	0.03	< 0.005	< 0.005	< 0.005	0.03
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005

3.2. Demolition (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.41	0.41	11.9	18.2	0.03	0.20	—	0.20	0.19	—	0.19	—	3,425	3,425	0.14	0.03	—	3,437
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.07	0.10	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	18.8	18.8	< 0.005	< 0.005	—	18.8
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.01	0.02	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	3.11	3.11	< 0.005	< 0.005	—	3.12
Demolition	—	—	—	—	—	—	0.00	0.00	—	0.00	0.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.76	3.76	< 0.005	< 0.005	< 0.005	3.95
Hauling	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.20	5.20	< 0.005	< 0.005	< 0.005	5.48
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.02	0.02	< 0.005	< 0.005	< 0.005	0.02
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.03	0.03	< 0.005	< 0.005	< 0.005	0.03

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005

3.3. Site Preparation (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	3.94	3.31	31.6	30.2	0.05	1.37	—	1.37	1.26	—	1.26	—	5,295	5,295	0.21	0.04	—	5,314
Dust From Material Movement	—	—	—	—	—	—	19.7	19.7	—	10.1	10.1	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.04	0.35	0.33	< 0.005	0.01	—	0.01	0.01	—	0.01	—	58.0	58.0	< 0.005	< 0.005	—	58.2
Dust From Material Movement	—	—	—	—	—	—	0.22	0.22	—	0.11	0.11	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.06	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	9.61	9.61	< 0.005	< 0.005	—	9.64
Dust From Material Movement	—	—	—	—	—	—	0.04	0.04	—	0.02	0.02	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.76	3.76	< 0.005	< 0.005	< 0.005	3.95
Hauling	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.20	5.20	< 0.005	< 0.005	< 0.005	5.48
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.04	0.04	< 0.005	< 0.005	< 0.005	0.04
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.06	0.06	< 0.005	< 0.005	< 0.005	0.06
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.01	0.01	< 0.005	< 0.005	< 0.005	0.01
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.01	0.01	< 0.005	< 0.005	< 0.005	0.01

3.4. Site Preparation (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.64	0.64	14.7	28.3	0.05	0.10	—	0.10	0.10	—	0.10	—	5,295	5,295	0.21	0.04	—	5,314
Dust From Material Movement	—	—	—	—	—	—	7.67	7.67	—	3.94	3.94	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.16	0.31	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	58.0	58.0	< 0.005	< 0.005	—	58.2
Dust From Material Movement	—	—	—	—	—	—	0.08	0.08	—	0.04	0.04	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.03	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	9.61	9.61	< 0.005	< 0.005	—	9.64
Dust From Material Movement	—	—	—	—	—	—	0.02	0.02	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.76	3.76	< 0.005	< 0.005	< 0.005	3.95
Hauling	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.20	5.20	< 0.005	< 0.005	< 0.005	5.48
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.04	0.04	< 0.005	< 0.005	< 0.005	0.04
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.06	0.06	< 0.005	< 0.005	< 0.005	0.06
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.01	0.01	< 0.005	< 0.005	< 0.005	0.01
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.01	0.01	< 0.005	< 0.005	< 0.005	0.01

3.5. Grading (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.07	1.74	16.3	17.9	0.03	0.72	—	0.72	0.66	—	0.66	—	2,959	2,959	0.12	0.02	—	2,970

Dust From Material Movement	—	—	—	—	—	—	7.08	7.08	—	3.42	3.42	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.07	1.74	16.3	17.9	0.03	0.72	—	0.72	0.66	—	0.66	—	2,959	2,959	0.12	0.02	—	2,970
Dust From Material Movement	—	—	—	—	—	—	7.08	7.08	—	3.42	3.42	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.26	0.21	2.01	2.21	< 0.005	0.09	—	0.09	0.08	—	0.08	—	365	365	0.01	< 0.005	—	366
Dust From Material Movement	—	—	—	—	—	—	0.87	0.87	—	0.42	0.42	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.37	0.40	< 0.005	0.02	—	0.02	0.01	—	0.01	—	60.4	60.4	< 0.005	< 0.005	—	60.6
Dust From Material Movement	—	—	—	—	—	—	0.16	0.16	—	0.08	0.08	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.76	3.76	< 0.005	< 0.005	< 0.005	3.95
Hauling	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.20	5.20	< 0.005	< 0.005	< 0.005	5.48
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.79	3.79	< 0.005	< 0.005	< 0.005	3.97
Hauling	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.25	5.25	< 0.005	< 0.005	< 0.005	5.53
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.46	0.46	< 0.005	< 0.005	< 0.005	0.49
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.64	0.64	< 0.005	< 0.005	< 0.005	0.68
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.08	0.08	< 0.005	< 0.005	< 0.005	0.08
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.11	0.11	< 0.005	< 0.005	< 0.005	0.11

3.6. Grading (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.39	0.39	10.3	17.8	0.03	0.08	—	0.08	0.08	—	0.08	—	2,959	2,959	0.12	0.02	—	2,970
Dust From Material Movement	—	—	—	—	—	—	2.76	2.76	—	1.34	1.34	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.39	0.39	10.3	17.8	0.03	0.08	—	0.08	0.08	—	0.08	—	2,959	2,959	0.12	0.02	—	2,970
Dust From Material Movement	—	—	—	—	—	—	2.76	2.76	—	1.34	1.34	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.05	1.27	2.19	< 0.005	0.01	—	0.01	0.01	—	0.01	—	365	365	0.01	< 0.005	—	366
Dust From Material Movement	—	—	—	—	—	—	0.34	0.34	—	0.16	0.16	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.23	0.40	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	60.4	60.4	< 0.005	< 0.005	—	60.6
Dust From Material Movement	—	—	—	—	—	—	0.06	0.06	—	0.03	0.03	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.76	3.76	< 0.005	< 0.005	< 0.005	3.95
Hauling	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.20	5.20	< 0.005	< 0.005	< 0.005	5.48
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.79	3.79	< 0.005	< 0.005	< 0.005	3.97
Hauling	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.25	5.25	< 0.005	< 0.005	< 0.005	5.53
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.46	0.46	< 0.005	< 0.005	< 0.005	0.49
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.64	0.64	< 0.005	< 0.005	< 0.005	0.68
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.08	0.08	< 0.005	< 0.005	< 0.005	0.08
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.11	0.11	< 0.005	< 0.005	< 0.005	0.11

3.7. Building Construction (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.37	0.31	2.83	3.37	0.01	0.11	—	0.11	0.10	—	0.10	—	710	710	0.03	0.01	—	712
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.07	0.06	0.52	0.62	< 0.005	0.02	—	0.02	0.02	—	0.02	—	118	118	< 0.005	< 0.005	—	118
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.06	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.1	11.1	< 0.005	< 0.005	0.01	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.2	11.2	< 0.005	< 0.005	< 0.005	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.33	5.33	< 0.005	< 0.005	< 0.005	5.60
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.88	0.88	< 0.005	< 0.005	< 0.005	0.93
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.8. Building Construction (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.19	5.43	8.61	0.01	0.07	—	0.07	0.07	—	0.07	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.19	0.19	5.43	8.61	0.01	0.07	—	0.07	0.07	—	0.07	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.09	0.09	2.60	4.13	0.01	0.03	—	0.03	0.03	—	0.03	—	710	710	0.03	0.01	—	712
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.02	0.48	0.75	< 0.005	0.01	—	0.01	0.01	—	0.01	—	118	118	< 0.005	< 0.005	—	118
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.06	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.1	11.1	< 0.005	< 0.005	0.01	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.2	11.2	< 0.005	< 0.005	< 0.005	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.33	5.33	< 0.005	< 0.005	< 0.005	5.60

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.88	0.88	< 0.005	< 0.005	< 0.005	0.93
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Building Construction (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.42	0.35	3.18	3.79	0.01	0.12	—	0.12	0.11	—	0.11	—	797	797	0.03	0.01	—	799
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.08	0.06	0.58	0.69	< 0.005	0.02	—	0.02	0.02	—	0.02	—	132	132	0.01	< 0.005	—	132
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.06	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.1	11.1	< 0.005	< 0.005	0.01	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.2	11.2	< 0.005	< 0.005	< 0.005	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.04	0.03	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.99	5.99	< 0.005	< 0.005	< 0.005	6.29
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.99	0.99	< 0.005	< 0.005	< 0.005	1.04
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.10. Building Construction (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.19	5.43	8.61	0.01	0.07	—	0.07	0.07	—	0.07	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.19	5.43	8.61	0.01	0.07	—	0.07	0.07	—	0.07	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.10	0.10	2.92	4.63	0.01	0.04	—	0.04	0.04	—	0.04	—	797	797	0.03	0.01	—	799
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.02	0.53	0.85	< 0.005	0.01	—	0.01	0.01	—	0.01	—	132	132	0.01	< 0.005	—	132
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.06	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.1	11.1	< 0.005	< 0.005	0.01	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.2	11.2	< 0.005	< 0.005	< 0.005	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.04	0.03	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	5.99	5.99	< 0.005	< 0.005	< 0.005	6.29
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.99	0.99	< 0.005	< 0.005	< 0.005	1.04
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Building Construction (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	2.90	2.90	< 0.005	< 0.005	—	2.91
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	0.48	0.48	< 0.005	< 0.005	—	0.48
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.0	11.0	< 0.005	< 0.005	< 0.005	11.5
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.02	0.02	< 0.005	< 0.005	< 0.005	0.02
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.12. Building Construction (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.19	5.43	8.61	0.01	0.07	—	0.07	0.07	—	0.07	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.01	0.02	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	2.90	2.90	< 0.005	< 0.005	—	2.91
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	0.48	0.48	< 0.005	< 0.005	—	0.48
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.0	11.0	< 0.005	< 0.005	< 0.005	11.5
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.02	0.02	< 0.005	< 0.005	< 0.005	0.02
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.13. Building Construction (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.33	0.27	2.47	2.95	0.01	0.09	—	0.09	0.09	—	0.09	—	620	620	0.03	0.01	—	622
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.45	0.54	< 0.005	0.02	—	0.02	0.02	—	0.02	—	103	103	< 0.005	< 0.005	—	103
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.06	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.1	11.1	< 0.005	< 0.005	0.01	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.2	11.2	< 0.005	< 0.005	< 0.005	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	4.66	4.66	< 0.005	< 0.005	< 0.005	4.89
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.77	0.77	< 0.005	< 0.005	< 0.005	0.81
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.14. Building Construction (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.19	5.43	8.61	0.01	0.07	—	0.07	0.07	—	0.07	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.19	5.43	8.61	0.01	0.07	—	0.07	0.07	—	0.07	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.08	2.28	3.61	0.01	0.03	—	0.03	0.03	—	0.03	—	620	620	0.03	0.01	—	622
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.42	0.66	< 0.005	0.01	—	0.01	0.01	—	0.01	—	103	103	< 0.005	< 0.005	—	103

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.06	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.1	11.1	< 0.005	< 0.005	0.01	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.2	11.2	< 0.005	< 0.005	< 0.005	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	4.66	4.66	< 0.005	< 0.005	< 0.005	4.89
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.77	0.77	< 0.005	< 0.005	< 0.005	0.81
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.15. Building Construction (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.09	0.07	0.66	0.82	< 0.005	0.02	—	0.02	0.02	—	0.02	—	174	174	0.01	< 0.005	—	174
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.01	0.12	0.15	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	28.8	28.8	< 0.005	< 0.005	—	28.9
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.0	11.0	< 0.005	< 0.005	< 0.005	11.5
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.28	1.28	< 0.005	< 0.005	< 0.005	1.35
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.21	0.21	< 0.005	< 0.005	< 0.005	0.22
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.16. Building Construction (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.19	5.43	8.61	0.01	0.07	—	0.07	0.07	—	0.07	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.02	0.64	1.01	< 0.005	0.01	—	0.01	0.01	—	0.01	—	174	174	0.01	< 0.005	—	174
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.12	0.18	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	28.8	28.8	< 0.005	< 0.005	—	28.9

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.0	11.0	< 0.005	< 0.005	< 0.005	11.5
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.28	1.28	< 0.005	< 0.005	< 0.005	1.35
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.21	0.21	< 0.005	< 0.005	< 0.005	0.22
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.17. Building Construction (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.78	0.65	5.90	7.03	0.01	0.22	—	0.22	0.20	—	0.20	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.09	0.08	0.69	0.83	< 0.005	0.03	—	0.03	0.02	—	0.02	—	174	174	0.01	< 0.005	—	174
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.01	0.13	0.15	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	28.8	28.8	< 0.005	< 0.005	—	28.9
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.2	11.2	< 0.005	< 0.005	< 0.005	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.31	1.31	< 0.005	< 0.005	< 0.005	1.37
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.22	0.22	< 0.005	< 0.005	< 0.005	0.23
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.18. Building Construction (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.19	5.43	8.61	0.01	0.07	—	0.07	0.07	—	0.07	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.02	0.64	1.01	< 0.005	0.01	—	0.01	0.01	—	0.01	—	174	174	0.01	< 0.005	—	174
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.12	0.18	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	28.8	28.8	< 0.005	< 0.005	—	28.9
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.2	11.2	< 0.005	< 0.005	< 0.005	11.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	1.31	1.31	< 0.005	< 0.005	< 0.005	1.37
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.22	0.22	< 0.005	< 0.005	< 0.005	0.23
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.19. Building Construction (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.75	0.63	5.63	7.01	0.01	0.20	—	0.20	0.18	—	0.18	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.32	0.26	2.36	2.93	0.01	0.08	—	0.08	0.08	—	0.08	—	620	620	0.03	0.01	—	622
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.43	0.54	< 0.005	0.02	—	0.02	0.01	—	0.01	—	103	103	< 0.005	< 0.005	—	103
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.06	0.04	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	10.9	10.9	< 0.005	< 0.005	0.01	11.4
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.0	11.0	< 0.005	< 0.005	< 0.005	11.5
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	4.58	4.58	< 0.005	< 0.005	< 0.005	4.81
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.76	0.76	< 0.005	< 0.005	< 0.005	0.80
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.20. Building Construction (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.19	5.43	8.61	0.01	0.07	—	0.07	0.07	—	0.07	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.19	5.43	8.61	0.01	0.07	—	0.07	0.07	—	0.07	—	1,480	1,480	0.06	0.01	—	1,485
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.08	2.28	3.61	0.01	0.03	—	0.03	0.03	—	0.03	—	620	620	0.03	0.01	—	622

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.42	0.66	< 0.005	0.01	—	0.01	0.01	—	0.01	—	103	103	< 0.005	< 0.005	—	103
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.06	0.04	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	10.9	10.9	< 0.005	< 0.005	0.01	11.4
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.0	11.0	< 0.005	< 0.005	< 0.005	11.5
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	4.58	4.58	< 0.005	< 0.005	< 0.005	4.81
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.76	0.76	< 0.005	< 0.005	< 0.005	0.80
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.21. Paving (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.85	0.71	6.52	8.84	0.01	0.29	—	0.29	0.26	—	0.26	—	1,351	1,351	0.05	0.01	—	1,355
Paving	—	0.08	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.36	0.48	< 0.005	0.02	—	0.02	0.01	—	0.01	—	74.0	74.0	< 0.005	< 0.005	—	74.3
Paving	—	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.07	0.09	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	12.3	12.3	< 0.005	< 0.005	—	12.3
Paving	—	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.4	11.4	< 0.005	< 0.005	< 0.005	11.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.62	0.62	< 0.005	< 0.005	< 0.005	0.65
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.10	0.10	< 0.005	< 0.005	< 0.005	0.11
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.22. Paving (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.39	0.36	7.18	9.83	0.01	0.12	—	0.12	0.11	—	0.11	—	1,435	1,435	0.06	0.01	—	1,440
Paving	—	0.08	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.02	0.39	0.54	< 0.005	0.01	—	0.01	0.01	—	0.01	—	78.6	78.6	< 0.005	< 0.005	—	78.9
Paving	—	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.07	0.10	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	13.0	13.0	< 0.005	< 0.005	—	13.1
Paving	—	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.07	0.05	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.4	11.4	< 0.005	< 0.005	< 0.005	11.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.62	0.62	< 0.005	< 0.005	< 0.005	0.65
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.10	0.10	< 0.005	< 0.005	< 0.005	0.11
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.23. Architectural Coating (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	4.59	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.06	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Architect Coatings	—	0.01	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.73	3.73	< 0.005	< 0.005	< 0.005	3.91
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.05	0.05	< 0.005	< 0.005	< 0.005	0.05
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.01	0.01	< 0.005	< 0.005	< 0.005	0.01
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.24. Architectural Coating (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	4.59	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.06	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.01	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.73	3.73	< 0.005	< 0.005	< 0.005	3.91
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.05	0.05	< 0.005	< 0.005	< 0.005	0.05
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.01	0.01	< 0.005	< 0.005	< 0.005	0.01
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.25. Architectural Coating (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	6.04	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.66	3.66	< 0.005	< 0.005	< 0.005	3.85
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.10	0.10	< 0.005	< 0.005	< 0.005	0.10

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.02	0.02	< 0.005	< 0.005	< 0.005	0.02
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.26. Architectural Coating (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	6.04	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.66	3.66	< 0.005	< 0.005	< 0.005	3.85
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.10	0.10	< 0.005	< 0.005	< 0.005	0.10
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.02	0.02	< 0.005	< 0.005	< 0.005	0.02
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.27. Architectural Coating (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	6.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.66	3.66	< 0.005	< 0.005	< 0.005	3.85
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.10	0.10	< 0.005	< 0.005	< 0.005	0.10
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.02	0.02	< 0.005	< 0.005	< 0.005	0.02
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.28. Architectural Coating (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Architect Coatings	—	6.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.66	3.66	< 0.005	< 0.005	< 0.005	3.85
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.10	0.10	< 0.005	< 0.005	< 0.005	0.10
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.02	0.02	< 0.005	< 0.005	< 0.005	0.02
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.29. Architectural Coating (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	6.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.63	3.63	< 0.005	< 0.005	< 0.005	3.82
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.10	0.10	< 0.005	< 0.005	< 0.005	0.10
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.02	0.02	< 0.005	< 0.005	< 0.005	0.02
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.30. Architectural Coating (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	6.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.17	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Architectural Coatings	—	0.03	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.63	3.63	< 0.005	< 0.005	< 0.005	3.82
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.10	0.10	< 0.005	< 0.005	< 0.005	0.10
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.02	0.02	< 0.005	< 0.005	< 0.005	0.02
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.31. Trenching (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.57	0.48	4.37	6.27	0.01	0.16	—	0.16	0.14	—	0.14	—	933	933	0.04	0.01	—	936
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.57	0.48	4.37	6.27	0.01	0.16	—	0.16	0.14	—	0.14	—	933	933	0.04	0.01	—	936
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.36	0.52	< 0.005	0.01	—	0.01	0.01	—	0.01	—	76.7	76.7	< 0.005	< 0.005	—	77.0
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.07	0.09	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	12.7	12.7	< 0.005	< 0.005	—	12.7
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.76	3.76	< 0.005	< 0.005	< 0.005	3.95
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.79	3.79	< 0.005	< 0.005	< 0.005	3.97
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.31	0.31	< 0.005	< 0.005	< 0.005	0.33
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.05	0.05	< 0.005	< 0.005	< 0.005	0.05
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.32. Trenching (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.17	3.03	3.65	0.01	0.07	—	0.07	0.06	—	0.06	—	536	536	0.02	< 0.005	—	537
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.17	3.03	3.65	0.01	0.07	—	0.07	0.06	—	0.06	—	536	536	0.02	< 0.005	—	537
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.01	0.25	0.30	< 0.005	0.01	—	0.01	0.01	—	0.01	—	44.0	44.0	< 0.005	< 0.005	—	44.2

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.05	0.05	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	7.29	7.29	< 0.005	< 0.005	—	7.31
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.76	3.76	< 0.005	< 0.005	< 0.005	3.95
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.79	3.79	< 0.005	< 0.005	< 0.005	3.97
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.31	0.31	< 0.005	< 0.005	< 0.005	0.33
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.05	0.05	< 0.005	< 0.005	< 0.005	0.05
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Sequest	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Demolition	Demolition	8/1/2025	8/4/2025	5.00	2.00	—
Site Preparation	Site Preparation	8/5/2025	8/8/2025	5.00	4.00	—
Grading	Grading	8/11/2025	10/10/2025	5.00	45.0	—
Building Construction Ph1	Building Construction	2/2/2026	10/2/2026	5.00	175	Bldg Ph1
Building Construction Ph2	Building Construction	4/1/2026	1/1/2027	5.00	198	Bldg Ph2
Building Construction Ph3	Building Construction	6/1/2026	3/1/2027	5.00	196	Bldg Ph3
Building Construction Ph4	Building Construction	11/2/2026	8/2/2027	5.00	196	Bldg Ph4

Paving	Paving	10/13/2025	11/7/2025	5.00	20.0	—
Architectural Coating Ph1	Architectural Coating	10/3/2026	10/9/2026	5.00	5.00	ArchCoating Ph1
Architectural Coating Ph2	Architectural Coating	1/4/2027	1/15/2027	5.00	10.0	Arch Coating Ph2
Architectural Coating Ph3	Architectural Coating	3/2/2027	3/15/2027	5.00	10.0	Arch Coating Ph3
Architectural Coating Ph4	Architectural Coating	8/3/2027	8/16/2027	5.00	10.0	Arch Coating Ph4
Utilities	Trenching	8/25/2025	10/3/2025	5.00	30.0	—

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Demolition	Concrete/Industrial Saws	Diesel	Average	1.00	8.00	33.0	0.73
Demolition	Excavators	Diesel	Average	3.00	8.00	36.0	0.38
Demolition	Rubber Tired Dozers	Diesel	Average	2.00	8.00	367	0.40
Site Preparation	Rubber Tired Dozers	Diesel	Average	3.00	8.00	367	0.40
Site Preparation	Tractors/Loaders/Backhoes	Diesel	Average	4.00	8.00	84.0	0.37
Grading	Excavators	Diesel	Average	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Average	1.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Average	1.00	8.00	367	0.40
Grading	Tractors/Loaders/Backhoes	Diesel	Average	3.00	8.00	84.0	0.37
Building Construction Ph1	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph1	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph1	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74

Building Construction Ph1	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Building Construction Ph1	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Building Construction Ph2	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph2	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph2	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph2	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Building Construction Ph2	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Building Construction Ph3	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph3	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph3	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph3	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Building Construction Ph3	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Building Construction Ph4	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction Ph4	Forklifts	Diesel	Average	1.00	8.00	82.0	0.20
Building Construction Ph4	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph4	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Building Construction Ph4	Welders	Diesel	Average	1.00	8.00	46.0	0.45

Paving	Pavers	Diesel	Average	1.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	2.00	6.00	89.0	0.36
Paving	Rollers	Diesel	Average	2.00	6.00	36.0	0.38
Paving	Cement and Mortar Mixers	Diesel	Average	2.00	6.00	10.0	0.56
Paving	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37
Architectural Coating Ph1	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph2	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph3	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph4	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Utilities	Excavators	Diesel	Average	1.00	8.00	36.0	0.38
Utilities	Plate Compactors	Diesel	Average	1.00	8.00	8.00	0.43
Utilities	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37

5.2.2. Mitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Demolition	Concrete/Industrial Saws	Diesel	Tier 4 Interim	1.00	8.00	33.0	0.73
Demolition	Excavators	Diesel	Tier 4 Interim	3.00	8.00	36.0	0.38
Demolition	Rubber Tired Dozers	Diesel	Tier 4 Interim	2.00	8.00	367	0.40
Site Preparation	Rubber Tired Dozers	Diesel	Tier 4 Interim	3.00	8.00	367	0.40
Site Preparation	Tractors/Loaders/Backhoes	Diesel	Tier 4 Interim	4.00	8.00	84.0	0.37
Grading	Excavators	Diesel	Tier 4 Interim	1.00	8.00	36.0	0.38

Grading	Graders	Diesel	Tier 4 Interim	1.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Tier 4 Interim	1.00	8.00	367	0.40
Grading	Tractors/Loaders/Backhoes	Diesel	Tier 4 Interim	3.00	8.00	84.0	0.37
Building Construction Ph1	Cranes	Diesel	Tier 4 Interim	1.00	7.00	367	0.29
Building Construction Ph1	Forklifts	Diesel	Tier 4 Interim	1.00	8.00	82.0	0.20
Building Construction Ph1	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph1	Tractors/Loaders/Backhoes	Diesel	Tier 4 Interim	1.00	7.00	84.0	0.37
Building Construction Ph1	Welders	Diesel	Tier 4 Interim	1.00	8.00	46.0	0.45
Building Construction Ph2	Cranes	Diesel	Tier 4 Interim	1.00	7.00	367	0.29
Building Construction Ph2	Forklifts	Diesel	Tier 4 Interim	1.00	8.00	82.0	0.20
Building Construction Ph2	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph2	Tractors/Loaders/Backhoes	Diesel	Tier 4 Interim	1.00	7.00	84.0	0.37
Building Construction Ph2	Welders	Diesel	Tier 4 Interim	1.00	8.00	46.0	0.45
Building Construction Ph3	Cranes	Diesel	Tier 4 Interim	1.00	7.00	367	0.29
Building Construction Ph3	Forklifts	Diesel	Tier 4 Interim	1.00	8.00	82.0	0.20
Building Construction Ph3	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph3	Tractors/Loaders/Backhoes	Diesel	Tier 4 Interim	1.00	7.00	84.0	0.37

Building Construction Ph3	Welders	Diesel	Tier 4 Interim	1.00	8.00	46.0	0.45
Building Construction Ph4	Cranes	Diesel	Tier 4 Interim	1.00	7.00	367	0.29
Building Construction Ph4	Forklifts	Diesel	Tier 4 Interim	1.00	8.00	82.0	0.20
Building Construction Ph4	Generator Sets	Electric	Average	1.00	8.00	14.0	0.74
Building Construction Ph4	Tractors/Loaders/Backhoes	Diesel	Tier 4 Interim	1.00	7.00	84.0	0.37
Building Construction Ph4	Welders	Diesel	Tier 4 Interim	1.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Tier 4 Interim	1.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Tier 4 Interim	2.00	6.00	89.0	0.36
Paving	Rollers	Diesel	Tier 4 Interim	2.00	6.00	36.0	0.38
Paving	Cement and Mortar Mixers	Diesel	Average	2.00	6.00	10.0	0.56
Paving	Tractors/Loaders/Backhoes	Diesel	Tier 4 Interim	1.00	8.00	84.0	0.37
Architectural Coating Ph1	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph2	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph3	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Architectural Coating Ph4	Air Compressors	Electric	Average	1.00	6.00	37.0	0.48
Utilities	Excavators	Diesel	Tier 4 Interim	1.00	8.00	36.0	0.38
Utilities	Plate Compactors	Diesel	Average	1.00	8.00	8.00	0.43
Utilities	Tractors/Loaders/Backhoes	Diesel	Tier 4 Interim	1.00	8.00	84.0	0.37

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Demolition	—	—	—	—
Demolition	Worker	0.00	12.0	LDA,LDT1,LDT2
Demolition	Vendor	2.00	0.25	HHDT,MHDT
Demolition	Hauling	2.00	0.25	HHDT
Demolition	Onsite truck	0.00	0.00	HHDT
Site Preparation	—	—	—	—
Site Preparation	Worker	0.00	12.0	LDA,LDT1,LDT2
Site Preparation	Vendor	2.00	0.25	HHDT,MHDT
Site Preparation	Hauling	2.00	0.25	HHDT
Site Preparation	Onsite truck	0.00	0.00	HHDT
Grading	—	—	—	—
Grading	Worker	0.00	12.0	LDA,LDT1,LDT2
Grading	Vendor	2.00	0.25	HHDT,MHDT
Grading	Hauling	2.00	0.25	HHDT
Grading	Onsite truck	0.00	—	HHDT
Building Construction Ph1	—	—	—	—
Building Construction Ph1	Worker	0.00	12.0	LDA,LDT1,LDT2
Building Construction Ph1	Vendor	6.00	0.25	HHDT,MHDT
Building Construction Ph1	Hauling	0.00	0.25	HHDT
Building Construction Ph1	Onsite truck	0.00	—	HHDT
Paving	—	—	—	—
Paving	Worker	0.00	12.0	LDA,LDT1,LDT2
Paving	Vendor	6.00	0.25	HHDT,MHDT

Paving	Hauling	0.00	0.00	HHDT
Paving	Onsite truck	0.00	—	HHDT
Architectural Coating Ph1	—	—	—	—
Architectural Coating Ph1	Worker	0.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph1	Vendor	2.00	0.25	HHDT,MHDT
Architectural Coating Ph1	Hauling	0.00	0.00	HHDT
Architectural Coating Ph1	Onsite truck	0.00	—	HHDT
Building Construction Ph2	—	—	—	—
Building Construction Ph2	Worker	0.00	0.00	LDA,LDT1,LDT2
Building Construction Ph2	Vendor	6.00	0.25	HHDT,MHDT
Building Construction Ph2	Hauling	0.00	0.25	HHDT
Building Construction Ph2	Onsite truck	0.00	—	HHDT
Building Construction Ph3	—	—	—	—
Building Construction Ph3	Worker	0.00	12.0	LDA,LDT1,LDT2
Building Construction Ph3	Vendor	6.00	0.25	HHDT,MHDT
Building Construction Ph3	Hauling	0.00	20.0	HHDT
Building Construction Ph3	Onsite truck	0.00	—	HHDT
Building Construction Ph4	—	—	—	—
Building Construction Ph4	Worker	0.00	12.0	LDA,LDT1,LDT2
Building Construction Ph4	Vendor	6.00	0.25	HHDT,MHDT
Building Construction Ph4	Hauling	0.00	0.00	HHDT
Building Construction Ph4	Onsite truck	0.00	—	HHDT
Architectural Coating Ph2	—	—	—	—
Architectural Coating Ph2	Worker	0.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph2	Vendor	2.00	0.25	HHDT,MHDT
Architectural Coating Ph2	Hauling	0.00	0.00	HHDT
Architectural Coating Ph2	Onsite truck	0.00	—	HHDT

Architectural Coating Ph3	—	—	—	—
Architectural Coating Ph3	Worker	0.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph3	Vendor	2.00	0.25	HHDT,MHDT
Architectural Coating Ph3	Hauling	0.00	0.00	HHDT
Architectural Coating Ph3	Onsite truck	0.00	—	HHDT
Architectural Coating Ph4	—	—	—	—
Architectural Coating Ph4	Worker	0.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph4	Vendor	2.00	0.25	HHDT,MHDT
Architectural Coating Ph4	Hauling	0.00	0.00	HHDT
Architectural Coating Ph4	Onsite truck	0.00	—	HHDT
Utilities	—	—	—	—
Utilities	Worker	0.00	12.0	LDA,LDT1,LDT2
Utilities	Vendor	2.00	0.25	HHDT,MHDT
Utilities	Hauling	0.00	0.00	HHDT
Utilities	Onsite truck	0.00	—	HHDT

5.3.2. Mitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Demolition	—	—	—	—
Demolition	Worker	0.00	12.0	LDA,LDT1,LDT2
Demolition	Vendor	2.00	0.25	HHDT,MHDT
Demolition	Hauling	2.00	0.25	HHDT
Demolition	Onsite truck	0.00	0.00	HHDT
Site Preparation	—	—	—	—
Site Preparation	Worker	0.00	12.0	LDA,LDT1,LDT2
Site Preparation	Vendor	2.00	0.25	HHDT,MHDT
Site Preparation	Hauling	2.00	0.25	HHDT

Site Preparation	Onsite truck	0.00	0.00	HHDT
Grading	—	—	—	—
Grading	Worker	0.00	12.0	LDA,LDT1,LDT2
Grading	Vendor	2.00	0.25	HHDT,MHDT
Grading	Hauling	2.00	0.25	HHDT
Grading	Onsite truck	0.00	—	HHDT
Building Construction Ph1	—	—	—	—
Building Construction Ph1	Worker	0.00	12.0	LDA,LDT1,LDT2
Building Construction Ph1	Vendor	6.00	0.25	HHDT,MHDT
Building Construction Ph1	Hauling	0.00	0.25	HHDT
Building Construction Ph1	Onsite truck	0.00	—	HHDT
Paving	—	—	—	—
Paving	Worker	0.00	12.0	LDA,LDT1,LDT2
Paving	Vendor	6.00	0.25	HHDT,MHDT
Paving	Hauling	0.00	0.00	HHDT
Paving	Onsite truck	0.00	—	HHDT
Architectural Coating Ph1	—	—	—	—
Architectural Coating Ph1	Worker	0.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph1	Vendor	2.00	0.25	HHDT,MHDT
Architectural Coating Ph1	Hauling	0.00	0.00	HHDT
Architectural Coating Ph1	Onsite truck	0.00	—	HHDT
Building Construction Ph2	—	—	—	—
Building Construction Ph2	Worker	0.00	0.00	LDA,LDT1,LDT2
Building Construction Ph2	Vendor	6.00	0.25	HHDT,MHDT
Building Construction Ph2	Hauling	0.00	0.25	HHDT
Building Construction Ph2	Onsite truck	0.00	—	HHDT
Building Construction Ph3	—	—	—	—

Building Construction Ph3	Worker	0.00	12.0	LDA,LDT1,LDT2
Building Construction Ph3	Vendor	6.00	0.25	HHDT,MHDT
Building Construction Ph3	Hauling	0.00	20.0	HHDT
Building Construction Ph3	Onsite truck	0.00	—	HHDT
Building Construction Ph4	—	—	—	—
Building Construction Ph4	Worker	0.00	12.0	LDA,LDT1,LDT2
Building Construction Ph4	Vendor	6.00	0.25	HHDT,MHDT
Building Construction Ph4	Hauling	0.00	0.00	HHDT
Building Construction Ph4	Onsite truck	0.00	—	HHDT
Architectural Coating Ph2	—	—	—	—
Architectural Coating Ph2	Worker	0.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph2	Vendor	2.00	0.25	HHDT,MHDT
Architectural Coating Ph2	Hauling	0.00	0.00	HHDT
Architectural Coating Ph2	Onsite truck	0.00	—	HHDT
Architectural Coating Ph3	—	—	—	—
Architectural Coating Ph3	Worker	0.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph3	Vendor	2.00	0.25	HHDT,MHDT
Architectural Coating Ph3	Hauling	0.00	0.00	HHDT
Architectural Coating Ph3	Onsite truck	0.00	—	HHDT
Architectural Coating Ph4	—	—	—	—
Architectural Coating Ph4	Worker	0.00	12.0	LDA,LDT1,LDT2
Architectural Coating Ph4	Vendor	2.00	0.25	HHDT,MHDT
Architectural Coating Ph4	Hauling	0.00	0.00	HHDT
Architectural Coating Ph4	Onsite truck	0.00	—	HHDT
Utilities	—	—	—	—
Utilities	Worker	0.00	12.0	LDA,LDT1,LDT2
Utilities	Vendor	2.00	0.25	HHDT,MHDT

Utilities	Hauling	0.00	0.00	HHDT
Utilities	Onsite truck	0.00	—	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating Ph1	7,101	2,367	0.00	0.00	219
Architectural Coating Ph2	18,936	6,312	0.00	0.00	401
Architectural Coating Ph3	18,936	6,312	0.00	0.00	474
Architectural Coating Ph4	18,936	6,312	0.00	0.00	474

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (Cubic Yards)	Material Exported (Cubic Yards)	Acres Graded (acres)	Material Demolished (Building Square Footage)	Acres Paved (acres)
Demolition	0.00	0.00	0.00	0.00	—
Site Preparation	0.00	0.00	15.0	0.00	—
Grading	200	0.00	90.0	0.00	—
Paving	0.00	0.00	0.00	0.00	0.90

5.6.2. Construction Earthmoving Control Strategies

Non-applicable. No control strategies activated by user.

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Single Family Housing	0.30	0%
Other Asphalt Surfaces	0.60	100%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2025	0.00	589	0.03	< 0.005
2026	327	589	0.03	< 0.005
2027	424	589	0.03	< 0.005

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

5.18.2.2. Mitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	10.8	annual days of extreme heat
Extreme Precipitation	2.10	annual days with precipitation above 20 mm
Sea Level Rise	0.00	meters of inundation depth
Wildfire	0.00	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	0	0	N/A
Wildfire	1	0	0	N/A
Flooding	0	0	0	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	1	1	1	2
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A

Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	—
AQ-Ozone	35.2
AQ-PM	40.4
AQ-DPM	72.3
Drinking Water	9.00
Lead Risk Housing	24.6
Pesticides	3.79
Toxic Releases	13.6
Traffic	78.7
Effect Indicators	—
CleanUp Sites	0.00
Groundwater	77.5
Haz Waste Facilities/Generators	72.0
Impaired Water Bodies	58.7
Solid Waste	0.00

Sensitive Population	—
Asthma	4.26
Cardio-vascular	13.1
Low Birth Weights	84.2
Socioeconomic Factor Indicators	—
Education	41.2
Housing	60.9
Linguistic	37.7
Poverty	24.4
Unemployment	7.77

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	—
Above Poverty	51.52059541
Employed	53.74053638
Median HI	62.06852303
Education	—
Bachelor's or higher	73.29654818
High school enrollment	100
Preschool enrollment	41.72975747
Transportation	—
Auto Access	71.35891184
Active commuting	51.99538047
Social	—
2-parent households	77.03066855

Voting	73.74566919
Neighborhood	—
Alcohol availability	61.11895291
Park access	53.31707943
Retail density	86.1157449
Supermarket access	59.7330938
Tree canopy	34.96727833
Housing	—
Homeownership	33.28628256
Housing habitability	50.05774413
Low-inc homeowner severe housing cost burden	37.03323495
Low-inc renter severe housing cost burden	54.86975491
Uncrowded housing	46.83690491
Health Outcomes	—
Insured adults	36.50712178
Arthritis	0.0
Asthma ER Admissions	96.9
High Blood Pressure	0.0
Cancer (excluding skin)	0.0
Asthma	0.0
Coronary Heart Disease	0.0
Chronic Obstructive Pulmonary Disease	0.0
Diagnosed Diabetes	0.0
Life Expectancy at Birth	35.6
Cognitively Disabled	96.9
Physically Disabled	71.5
Heart Attack ER Admissions	97.2

Mental Health Not Good	0.0
Chronic Kidney Disease	0.0
Obesity	0.0
Pedestrian Injuries	76.8
Physical Health Not Good	0.0
Stroke	0.0
Health Risk Behaviors	—
Binge Drinking	0.0
Current Smoker	0.0
No Leisure Time for Physical Activity	0.0
Climate Change Exposures	—
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	19.9
Elderly	34.9
English Speaking	58.3
Foreign-born	43.6
Outdoor Workers	54.3
Climate Change Adaptive Capacity	—
Impervious Surface Cover	34.8
Traffic Density	95.2
Traffic Access	23.0
Other Indices	—
Hardship	44.0
Other Decision Support	—
2016 Voting	90.2

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	28.0
Healthy Places Index Score for Project Location (b)	64.0
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	No
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.
b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Land Use	Project-specific assumptions.
Construction: Construction Phases	Project Schedule
Construction: Off-Road Equipment	Equipment added for utilities. Building construction equipment reduced for small number of homes. Electric hook-ups during building and electric air compressors.
Construction: Dust From Material Movement	200 cy of fill.
Construction: Trips and VMT	Reduced trip length to reflect "on-site" emissions. Removed non-diesel fueled vehicles.
Construction: Architectural Coatings	Divided square footage by phase.
Operations: Vehicle Data	Based on Project LTA

Operations: Hearths	No woodburning devices or natural gas devices.